



CASTLE ROCK CITY COUNCIL AGENDA

Regular Meeting: Monday, June 26, 2023
7:30 PM

Location
Castle Rock Senior Center
222 Second Ave SW
Castle Rock, WA 98611

AGENDA

To join this meeting from your computer, tablet or smartphone: <https://global.gotomeeting.com/join/201632365>

To join this meeting using your phone: [+1 \(646\) 749-3112](tel:+16467493112) Access Code: 201-632-365 (Press *6 to speak)

New to GoToMeeting? Get the app now and be ready: <https://global.gotomeeting.com/install/201632365>

1. CALL TO ORDER

- a. Pledge of Allegiance
- b. Roll Call
- c. Changes to Agenda

2. PROCLAMATIONS & PRESENTATIONS

3. CITIZEN COMMENTS - maximum 3 minutes

4. DEPARTMENT REPORTS

- City Attorney Frank Randolph
 - Police Chief Charlie Worley
 - Public Works Director Dave Vorse
 - City Engineer Tom Gower
 - Clerk-Treasurer Carie Cuttonaro
1. Expenditure, Revenue, Cash & Investments Reports (page 3-7)
 2. 2024 Budget

5. COUNCIL AND AD HOC COMMITTEE REPORTS

- Mayor / Mayor Pro-Tempore / Councilmembers
- CRCDA Representative

6. PUBLIC HEARINGS

7. CONSENT AGENDA

- a. Approve the minutes of the June 12, 2023 Regular Council Meeting. (page 8-10)

8. OLD BUSINESS

9. NEW BUSINESS

- a. Request for trimming and possible removal of walnut tree located on the east side of 414 Front Ave SW along Huntington Ave S. (page 11-13)
- b. Postage machine lease agreement with FP Mailing Solutions; \$194.37 (including tax) per quarter on a 63 month term with first six months free. (Current agreement with Pitney Bowes is \$333.20)

(including tax) per quarter). (page 14)

c. Washington State Department of Transportation (WSDOT) requests approval of a temporary nighttime noise exemption for pavement repair on existing pavement that has been damaged due to various reasons. Impact on traffic would be minimized during nighttime hours. (page 15-18)

d. Special Event Permit #2023-0014; Monster Trucks Most Wanted - Mt St Helens Motorcycle Club; July 21 and July 22, 2023 from 6:00 PM to 10:00 PM. Insurance has been received. (page 19-28)

e. 2023 Joint Agency Pavement Overlay Project contract with Cowlitz County. Lakeside was awarded the bid. If all work is completed, total cost to City is \$49,500 not including sales tax. (page 29-221)

10. OTHER BUSINESS

11. ADJOURNMENT

NEXT REGULAR COUNCIL MEETINGS:

<u>3Q23</u>	<u>4Q23</u>	<u>1Q24</u>	<u>2Q24</u>
July 10	October 09	January 08	April 08
July 24	October 23	January 22	April 22
August 14	November 13	February 12	May 13
August 28	November 27	February 26	Tuesday, May 28
September 11	December 11	March 11	June 10
September 25	Wednesday, December 27	March 25	June 24

Non-Discrimination Statement: This institution is an equal opportunity provider and employer. If you wish to file a Civil Rights program complaint of discrimination, complete the USDA Program Discrimination Complaint Form, found online at https://www.ascr.usda.gov/sites/default/files/Complain_combined_6_8_12_508_0.pdf or at any USDA office, or call 866.632.9992 to request the form. You may also write a letter containing all of the information requested in the form. Send your completed complaint form or letter by mail to USDA, Office of the Assistant Secretary for Civil Rights, 1400 Independence Ave, SW, Stop 9410, Washington, DC 20250-9410 or email to program.intake@usda.gov or by fax (202) 690-7442.

Title VI: The City of Castle Rock ensures compliance with Title VI of the Civil Rights Act of 1964 and American Disabilities Act of 1990 by prohibiting discrimination against any person on the basis of race, color, national origin, sex or disabilities in the provision of benefits and services from its federal assisted programs and activities. If you need special accommodations to participate in this meeting, please contact Carie Cuttonaro at 360.274.8181 by 9:00 a.m. three days prior to the meeting.

City Council may add and take action on other items not listed on this Agenda.

2023 Expenditures

<u>Fund</u>	<u>Sub</u>	<u>#</u>	<u>January</u>	<u>February</u>	<u>March</u>	<u>April</u>	<u>May</u>	<u>Total</u>	<u>Budget</u>	<u>Remaining</u>	<u>% Expended</u>
General	Legislative	010 0 010	6,802.29	10,316.35	5,518.52	5,135.43	5,034.19	32,806.78	87,946.00	55,139.22	37.30%
	Municipal	010 0 020	4,538.88	7,923.80	7,085.79	5,471.47	7,660.40	32,680.34	84,242.00	51,561.66	38.79%
	Financial	010 0 030	12,794.54	17,278.52	29,320.23	15,194.29	11,113.09	85,700.67	218,426.00	132,725.33	39.24%
	Law Enforcement	010 0 040	103,335.70	162,196.49	109,110.52	78,649.31	78,847.74	532,139.76	1,255,909.00	723,769.24	42.37%
	Parks	010 0 060	185.35	3,627.65	335.40	30,704.09	1,472.60	36,325.09	13,860.00	(22,465.09)	262.09%
	Building/Planning	010 0 070	7,692.82	6,478.28	7,913.88	11,834.71	6,477.43	40,397.12	128,848.00	88,450.88	31.35%
	Non-Departmental	010 0 099	161,092.96	21,511.16	10,590.75	4,306.66	36,716.27	234,217.80	523,108.00	288,890.20	44.77%
General Total			296,442.54	229,332.25	169,875.09	151,295.96	147,321.72	994,267.56	2,312,339.00	1,318,071.44	43.00%
Streets			14,868.92	14,356.79	26,153.28	29,160.71	7,256.79	91,796.49	199,629.00	107,832.51	45.98%
Building Code			3,257.22	5,123.58	4,061.07	4,380.53	2,408.69	19,231.09	51,129.00	31,897.91	37.61%
Visitor Center			1,654.71	1,374.30	555.84	446.94	1,729.42	5,761.21	19,529.00	13,767.79	29.50%
Library			716.84	5,481.93	1,213.92	459.75	538.77	8,411.21	35,566.00	27,154.79	23.65%
Criminal Justice			142.50	-	-	142.50	-	285.00	1,667.00	1,382.00	17.10%
Local Criminal Justice			505.43	10,639.42	1,073.52	7,949.06	6,594.68	26,762.11	39,728.00	12,965.89	67.36%
Accumulative Reserve			-	-	-	-	-	-	-	-	0.00%
CDBG Grant/Home Rehab Proj			-	-	-	-	-	-	1,000.00	1,000.00	0.00%
DOT Spoils Site			8,493.24	14,291.25	9,547.83	4,493.82	17,010.82	53,836.96	374,215.00	320,378.04	14.39%
Public Works Vehicle Replacement			88,885.52	-	-	-	-	88,885.52	89,000.00	114.48	99.87%
Police Vehicle Replacement			50,487.65	4,543.01	139.31	4,916.27	-	60,086.24	70,000.00	9,913.76	85.84%
Drug Enforcement			-	-	-	-	-	-	-	-	0.00%
Low Income Housing			-	-	-	-	-	-	-	-	0.00%
Swimming Pool Construction			-	-	-	-	-	-	-	-	0.00%
REET Construction			-	-	-	21,967.95	-	21,967.95	144,800.00	122,832.05	15.17%
Street Construction			36.30	-	1,019.13	-	5,480.22	6,535.65	407,000.00	400,464.35	1.61%
Water/Sewer Operating			173,951.20	190,300.09	219,181.14	172,790.39	215,144.65	971,367.47	2,006,873.00	1,035,505.53	48.40%
Regional Water System			59,580.23	62,951.32	47,457.67	43,366.69	32,274.07	245,629.98	611,066.00	365,436.02	40.20%
Stormwater Management			15,631.82	17,556.15	9,444.36	13,644.55	10,152.56	66,429.44	144,057.00	77,627.56	46.11%
Stormwater Capital			-	-	83.83	-	6,323.89	6,407.72	25,000.00	18,592.28	25.63%
Regional Water Capital			18.38	9,418.69	-	(57.80)	73.50	9,452.77	16,225.00	6,772.23	58.26%
Muni Water Capital Improvement			201,937.99	18,852.22	55,040.53	470,235.92	909,430.66	1,655,497.32	4,422,700.00	2,767,202.68	37.43%
Water Bond Reserve			-	-	-	-	-	-	-	-	0.00%
Sewer Bond Reserve			-	-	-	-	-	-	-	-	0.00%
Sewer Loan Reserve Fund			-	-	-	-	-	-	-	-	0.00%
Short Lived Asset Reserve Fund			-	-	-	-	-	-	-	-	0.00%
Emerg Repair/Replace Res Fund			-	-	-	-	-	-	-	-	0.00%
Muni Sewer Cap Impr Reserve			149.68	513.66	38,358.99	18,519.39	4,886.29	62,428.01	201,100.00	138,671.99	31.04%
Boat Launch Facility			1,570.04	5,371.40	1,076.60	18,524.61	1,157.87	27,700.52	1,030,479.00	1,002,778.48	2.69%
Utility Deposit			488.61	80.00	570.95	272.36	640.00	2,051.92	10,000.00	7,948.08	20.52%
Transportation Benefit District			-	4,121.00	-	-	-	4,121.00	207,700.00	203,579.00	1.98%
TBD Capital Project			-	-	-	-	-	-	-	-	0.00%
State Custodial Pass-Thru Fund			802.70	403.43	1,217.81	296.22	391.63	3,111.79	24,510.00	21,398.21	12.70%
Totals			919,621.52	594,710.49	586,070.87	962,805.82	1,368,816.23	4,432,024.93	12,445,312.00	8,013,287.07	35.61%
Balance Check			919,621.52	594,710.49	586,070.87	962,805.82	1,368,816.23	4,432,024.93	12,445,312.00	8,013,287.07	
s/b -0-			-	-	-	-	-	-	-	-	

2023 Revenue

<u>Fund</u>	<u>#</u>	<u>January</u>	<u>February</u>	<u>March</u>	<u>April</u>	<u>May</u>	<u>Total</u>	<u>Budget</u>	<u>Remaining</u>	<u>% Received</u>
General	010	152,036.78	110,779.02	140,237.95	161,661.38	297,154.07	861,869.20	2,043,364.00	1,181,494.80	42.18%
Streets	100	77,403.14	3,374.12	7,132.08	3,238.83	3,913.97	95,062.14	175,950.00	80,887.86	54.03%
Building Code	115	6,923.98	5,243.18	18,263.49	1,391.99	3,694.05	35,516.69	50,000.00	14,483.31	71.03%
Visitor Center	120	504.30	1,889.90	669.83	784.28	960.35	4,808.66	16,075.00	11,266.34	29.91%
Library	130	1,598.47	880.89	1,149.86	527.95	16,293.07	20,450.24	16,200.00	(4,250.24)	126.24%
Criminal Justice	140	4,592.35	89.07	117.49	1,125.45	134.23	6,058.59	3,200.00	(2,858.59)	189.33%
Local Criminal Justice	145	4,938.71	5,927.83	4,988.66	5,140.69	5,707.36	26,703.25	45,000.00	18,296.75	59.34%
Accumulative Reserve	150	56.13	49.48	64.83	66.00	72.56	309.00	-	(309.00)	0.00%
CDBG Grant/Home Rehab Proj	160	561.33	504.74	668.50	673.21	747.31	3,155.09	-	(3,155.09)	0.00%
DOT Spoils Site	170	33,563.59	10,688.75	43,334.90	9,166.18	16,090.70	112,844.12	346,500.00	233,655.88	32.57%
Public Works Vehicle Replacement	180	30,157.17	2.48	-	3.29	3.63	30,166.57	30,000.00	(166.57)	100.56%
Police Vehicle Replacement	185	60,022.45	47.01	60.77	62.69	36.28	60,229.20	60,000.00	(229.20)	100.38%
Drug Enforcement	190	7.49	7.42	8.10	9.89	10.88	43.78	200.00	156.22	21.89%
Low Income Housing	195	160.91	3,153.40	202.58	204.60	228.54	3,950.03	3,000.00	(950.03)	131.67%
Swimming Pool Construction	300	411.64	376.08	498.33	501.60	558.67	2,346.32	10,160.00	7,813.68	23.09%
REET Capital Fund	310	4,705.75	1,531.90	469.97	3,942.42	2,086.79	12,736.83	45,000.00	32,263.17	28.30%
Street Construction	320	2,989.24	-	-	-	-	2,989.24	407,000.00	404,010.76	0.73%
Water/Sewer Operating	400	140,025.74	157,404.97	176,291.30	157,093.30	157,846.26	788,661.57	1,948,949.00	1,160,287.43	40.47%
Regional Water System	410	49,863.26	75,921.22	56,965.58	58,892.52	57,801.04	299,443.62	611,066.00	311,622.38	49.00%
Stormwater Management	420	11,430.26	12,162.98	15,929.08	11,681.01	12,009.82	63,213.15	141,831.00	78,617.85	44.57%
Stormwater Capital	425	41.16	49.48	64.83	66.00	72.56	294.03	-	(294.03)	0.00%
Regional Water Capital	430	10,190.86	212.78	6,879.56	4,483.80	322.86	22,089.86	15,000.00	(7,089.86)	147.27%
Muni Water Capital Improvement	435	1,161,013.18	5,522.43	11,707.26	9,465.81	383,325.89	1,571,034.57	3,175,000.00	1,603,965.43	49.48%
Water Bond Reserve	440	6,907.39	512.16	676.60	683.10	758.19	9,537.44	6,376.00	(3,161.44)	149.58%
Sewer Bond Reserve	450	18,671.77	791.75	1,049.33	1,056.02	1,171.75	22,740.62	17,841.00	(4,899.62)	127.46%
Sewer Loan Reserve Fund	460	1,697.65	49.48	64.83	66.00	72.56	1,950.52	1,649.00	(301.52)	118.29%
Short Lived Asset Reserve Fund	463	3,452.75	116.29	153.95	155.10	170.50	4,048.59	3,333.00	(715.59)	121.47%
Emerg Repair/Replace Res Fund	465	-	-	-	-	-	-	-	-	0.00%
Muni Sewer Cap Impr Reserve	470	684.82	633.40	4,938.66	844.81	747.31	7,849.00	2,500.00	(5,349.00)	313.96%
Boat Launch Facility	475	878.53	751.39	3,163.10	761.89	1,473.64	7,028.55	1,033,800.00	1,026,771.45	0.68%
Utility Deposit	631	682.08	345.57	1,363.09	807.50	1,235.71	4,433.95	10,000.00	5,566.05	44.34%
Transportation Benefit District	632	10,923.87	13,769.89	11,743.90	10,930.79	14,288.60	61,657.05	150,095.00	88,437.95	41.08%
TBD Capital Project	633	-	-	-	-	-	-	-	-	0.00%
State Custodial Pass-Through Fund	634	778.20	406.68	535.56	353.47	423.13	2,497.04	24,510.00	22,012.96	10.19%
Totals		1,797,874.95	413,195.74	509,393.97	445,841.57	979,412.28	4,145,718.51	10,393,599.00	6,247,880.49	39.89%
Balance Check		1,797,874.95	413,195.74	509,393.97	445,841.57	979,412.28	4,145,718.51	10,393,599.00	6,247,880.49	
s/b -0-		-	-	-	-	-	-	-	-	

2023 Expense/Revenue Comparison

Expenses					Revenue							% of Actual
Fund	#	Actuals	Budget	% Expended	Actuals	Budget	% Received	Budget Revenue Less Actual Expenses	% of Budget Expended	Actual Revenue Less Actual Expenses	Revenue Expended	
General Total	010	994,267.56	2,312,339.00	43.00%	861,869.20	2,043,364.00	42.18%	1,049,096.44	48.66%	(132,398.36)	115.36%	
Streets	100	91,796.49	199,629.00	45.98%	95,062.14	175,950.00	54.03%	84,153.51	52.17%	3,265.65	96.56%	
Building Code	115	19,231.09	51,129.00	37.61%	35,516.69	50,000.00	71.03%	30,768.91	38.46%	16,285.60	54.15%	
Visitor Center	120	5,761.21	19,529.00	29.50%	4,808.66	16,075.00	29.91%	10,313.79	35.84%	(952.55)	119.81%	
Library	130	8,411.21	35,566.00	23.65%	20,450.24	16,200.00	126.24%	7,788.79	51.92%	12,039.03	41.13%	
Criminal Justice	140	285.00	1,667.00	17.10%	6,058.59	3,200.00	189.33%	2,915.00	8.91%	5,773.59	4.70%	
Local Criminal Justice	145	26,762.11	39,728.00	67.36%	26,703.25	45,000.00	59.34%	18,237.89	59.47%	(58.86)	100.22%	
Accumulative Reserve	150	-	-		309.00	-		-		309.00	0.00%	
CDBG Grant/Home Rehab Proj	160	-	1,000.00	0.00%	3,155.09	-		-		3,155.09	0.00%	
DOT Spoils Site	170	53,836.96	374,215.00	14.39%	112,844.12	346,500.00	32.57%	292,663.04	15.54%	59,007.16	47.71%	
Public Works Vehicle Replacement	180	88,885.52	89,000.00	99.87%	30,166.57	30,000.00	100.56%	(58,885.52)	296.29%	(58,718.95)	294.65%	
Police Vehicle Replacement	185	60,086.24	70,000.00	85.84%	60,229.20	60,000.00	100.38%	(86.24)	100.14%	142.96	99.76%	
Drug Enforcement	190	-	-		43.78	200.00	21.89%	200.00	0.00%	43.78	0.00%	
Low Income Housing	195	-	-		3,950.03	3,000.00	131.67%	3,000.00	0.00%	3,950.03	0.00%	
Swimming Pool Construction	300	-	-		2,346.32	10,160.00	23.09%	10,160.00	0.00%	2,346.32	0.00%	
REET Construction	310	21,967.95	144,800.00	15.17%	12,736.83	45,000.00	28.30%	23,032.05	48.82%	(9,231.12)	172.48%	
Street Construction	320	6,535.65	407,000.00	1.61%	2,989.24	407,000.00	0.73%	400,464.35	1.61%	(3,546.41)	218.64%	
Water/Sewer Operating	400	971,367.47	2,006,873.00	48.40%	788,661.57	1,948,949.00	40.47%	977,581.53	49.84%	(182,705.90)	123.17%	
Regional Water System	410	245,629.98	611,066.00	40.20%	299,443.62	611,066.00	49.00%	365,436.02	40.20%	53,813.64	82.03%	
Stormwater Management	420	66,429.44	144,057.00	46.11%	63,213.15	141,831.00	44.57%	75,401.56	46.84%	(3,216.29)	105.09%	
Stormwater Capital	425	6,407.72	25,000.00	25.63%	294.03	-		(6,407.72)		(6,113.69)	2179.27%	
Regional Water Capital	430	9,452.77	16,225.00	58.26%	22,089.86	15,000.00	147.27%	5,547.23	63.02%	12,637.09	42.79%	
Muni Water Capital Improvement	435	1,655,497.32	4,422,700.00	37.43%	1,571,034.57	3,175,000.00	49.48%	1,519,502.68	52.14%	(84,462.75)	105.38%	
Water Bond Reserve	440	-	-		9,537.44	6,376.00	149.58%	6,376.00	0.00%	9,537.44	0.00%	
Sewer Bond Reserve	450	-	-		22,740.62	17,841.00	127.46%	17,841.00	0.00%	22,740.62	0.00%	
Sewer Loan Reserve Fund	460	-	-		1,950.52	1,649.00	118.29%	1,649.00	0.00%	1,950.52	0.00%	
Short Lived Asset Reserve Fund	463	-	-		4,048.59	3,333.00	121.47%	3,333.00	0.00%	4,048.59	0.00%	
Emerg Repair/Replace Res Fund	465	-	-		-	-		-		-		
Muni Sewer Cap Impr Reserve	470	62,428.01	201,100.00	31.04%	7,849.00	2,500.00	313.96%	(59,928.01)	2497.12%	(54,579.01)	795.36%	
Boat Launch Facility	475	27,700.52	1,030,479.00	2.69%	7,028.55	1,033,800.00	0.68%	1,006,099.48	2.68%	(20,671.97)	394.11%	
Utility Deposit	631	2,051.92	10,000.00	20.52%	4,433.95	10,000.00	44.34%	7,948.08	20.52%	2,382.03	46.28%	
Transportation Benefit District	632	4,121.00	207,700.00	1.98%	61,657.05	150,095.00	41.08%	145,974.00	2.75%	57,536.05	6.68%	
TBD Capital Project	633	-	-		-	-		-		-		
State Custodial Pass-Thru Fund	634	3,111.79	24,510.00	12.70%	2,497.04	24,510.00	10.19%	21,398.21	12.70%	(614.75)	124.62%	
		4,432,024.93	12,445,312.00	35.61%	4,145,718.51	10,393,599.00	39.89%	5,961,574.07	42.64%	(286,306.42)	106.91%	
Balance Check		4,432,024.93	12,445,312.00		4,145,718.51	10,393,599.00		5,961,574.07		(286,306.42)		
s/b -0-		-	-		-	-		-		(0.00)		



Cash and Investment Activity

Period: 2023 - May
Period Totals

Fund	Beginning Cash	Beginning Investments	Activity In	Activity Out	Ending Cash	Ending Investments	Ending Balance
010 General Fund	\$333,235.18	\$819,303.50	\$292,989.62	\$279,060.67	\$351,339.58	\$951,031.45	\$1,302,371.03
011 Petty Cash/Change Fund	\$760.00	\$0.00	\$0.00	\$0.00	\$760.00	\$0.00	\$760.00
100 Street Fund	(\$18,302.15)	\$40,086.92	\$26,649.71	\$7,332.97	\$1,090.77	\$17,351.18	\$18,441.95
115 Building Code Account Fund	\$27,487.77	\$53,177.60	\$3,403.83	\$15,332.31	\$15,849.51	\$66,101.22	\$81,950.73
120 Visitor Center Fund	\$3,232.27	\$6,543.30	\$927.70	\$2,622.77	\$1,569.85	\$7,436.65	\$9,006.50
130 Library Fund	\$289.28	\$11,452.83	\$18,656.99	\$578.68	\$18,407.50	\$9,088.91	\$27,496.41
140 Criminal Justice Fund	\$8,104.04	\$29,453.02	\$0.00	\$1,119.21	\$7,119.06	\$30,572.23	\$37,691.29
145 Local Criminal Justice Fund	\$31,662.83	\$64,634.49	\$5,359.10	\$21,281.45	\$16,088.74	\$79,321.26	\$95,410.00
150 Accumulative Reserve Fund	\$4,333.43	\$16,362.34	\$0.00	\$163.22	\$4,242.77	\$16,525.56	\$20,768.33
160 CDBG Grant/Home Rehab Project	\$39,271.79	\$166,903.20	\$0.00	\$3,308.11	\$36,710.99	\$170,211.31	\$206,922.30
170 DOT Spoil Site Fund	\$25,654.04	\$0.00	\$16,000.00	\$37,667.52	\$4,077.22	\$20,656.70	\$24,733.92
180 Public Works Vehicle Replacement	\$593.23	\$814.87	\$0.00	\$11.76	\$585.10	\$826.63	\$1,411.73
185 Police Vehicle Replacement Fund	(\$5,328.09)	\$15,543.40	\$7,317.40	\$36.28	\$1,989.31	\$8,262.28	\$10,251.59
190 Drug Enforcement Fund	\$775.03	\$2,452.71	\$0.00	\$26.17	\$759.74	\$2,478.88	\$3,238.62
195 Low Income Housing Fund	\$12,568.16	\$50,724.88	\$0.00	\$1,329.66	\$11,467.04	\$52,054.54	\$63,521.58
300 Swimming Pool Const Fund, 1987	\$29,794.90	\$124,359.47	\$0.00	\$2,885.20	\$27,468.37	\$127,244.67	\$154,713.04
310 REET Capital Fund	\$9,817.56	\$117,812.10	\$14,963.17	\$460.72	\$24,780.73	\$104,935.72	\$129,716.45
320 Street Construction Capital Fund	(\$7,377.02)	\$0.00	\$0.00	\$5,480.22	(\$12,857.24)	\$0.00	(\$12,857.24)
400 Water/Sewer Operating Fund	\$110,999.53	\$661,892.49	\$181,034.54	\$217,948.86	\$76,889.42	\$638,704.21	\$715,593.63
410 Regional Water System Fund	\$109,099.07	\$442,626.54	\$55,802.17	\$44,920.40	\$121,979.71	\$455,272.87	\$577,252.58
420 Stormwater Management Fund	(\$11,739.30)	\$0.00	\$12,009.82	\$10,152.56	(\$9,882.04)	\$0.00	(\$9,882.04)
425 Stormwater Capital Reserve Fund	\$3,843.55	\$16,362.34	\$0.00	\$6,487.11	(\$2,571.00)	\$16,525.56	\$13,954.56
430 Regional Water Capital Improvement	\$19,541.42	\$70,358.88	\$0.00	\$3,252.48	\$16,611.80	\$73,537.86	\$90,149.66
435 Muni Water Capital Improvement	(\$98,528.87)	\$1,826,140.58	\$782,503.42	\$915,695.71	(\$225,456.11)	\$1,426,963.05	\$1,201,506.94
440 Water Bond Reserve Fund	\$39,675.30	\$169,355.92	\$0.00	\$3,334.27	\$37,099.22	\$172,690.19	\$209,789.41
450 Sewer Bond Reserve Fund	\$61,622.79	\$261,809.65	\$0.00	\$5,074.10	\$57,720.44	\$266,883.75	\$324,604.19
460 Sewer Loan Reserve Fund	\$3,928.96	\$16,362.34	\$0.00	\$163.22	\$3,838.30	\$16,525.56	\$20,363.86
463 Short Lived Asset Reserve Fund	\$9,421.91	\$38,453.12	\$0.00	\$381.38	\$9,211.03	\$38,834.50	\$48,045.53
470 Muni Sewer Capital Imprv Reserve	(\$3,445.92)	\$209,446.91	\$39,982.91	\$5,633.60	\$31,650.70	\$170,211.31	\$201,862.01
475 Boat Launch Facility Fund	(\$11,398.65)	\$35,177.40	\$17,646.60	\$1,241.31	\$5,090.08	\$19,004.44	\$24,094.52
631 Utility Deposit Fund	\$15,523.88	\$61,358.79	\$320.00	\$1,437.92	\$14,681.67	\$62,796.71	\$77,478.38
632 Transportation Benefit District Fund	\$197,747.17	\$0.00	\$14,288.60	\$0.00	\$212,035.77	\$0.00	\$212,035.77
633 TBD Capital Project Fund	\$3,456.17	\$0.00	\$0.00	\$0.00	\$3,456.17	\$0.00	\$3,456.17
634 State Custodial Pass-Thru Fund	\$1,713.32	\$0.00	\$423.13	\$391.63	\$1,744.82	\$0.00	\$1,744.82
	\$948,032.58	\$5,328,969.59	\$1,490,278.71	\$1,594,811.47	\$865,549.02	\$5,022,049.20	\$5,887,598.22



Investments Activity

Period: 2023 - May
Period Totals: Period

Fund	Description	Beginning Balance	Investments Acquired	Liquidated	Reinvested Interest	Ending Balance
010	General Fund	\$819,303.50	\$127,552.50	\$0.00	\$4,175.45	\$951,031.45
011	Petty Cash/Change Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
100	Street Fund	\$40,086.92	\$0.00	\$22,811.92	\$76.18	\$17,351.18
115	Building Code Account Fund	\$53,177.60	\$12,633.40	\$0.00	\$290.22	\$66,101.22
120	Visitor Center Fund	\$6,543.30	\$860.70	\$0.00	\$32.65	\$7,436.65
130	Library Fund	\$11,452.83	\$0.00	\$2,403.83	\$39.91	\$9,088.91
140	Criminal Justice Fund	\$29,453.02	\$984.98	\$0.00	\$134.23	\$30,572.23
145	Local Criminal Justice Fund	\$64,634.49	\$14,338.51	\$0.00	\$348.26	\$79,321.26
150	Accumulative Reserve Fund	\$16,362.34	\$90.66	\$0.00	\$72.56	\$16,525.56
160	CDBG Grant/Home Rehab Project	\$166,903.20	\$2,560.80	\$0.00	\$747.31	\$170,211.31
170	DOT Spoil Site Fund	\$0.00	\$20,566.00	\$0.00	\$90.70	\$20,656.70
180	Public Works Vehicle Replacement	\$814.87	\$8.13	\$0.00	\$3.63	\$826.63
185	Police Vehicle Replacement Fund	\$15,543.40	\$0.00	\$7,317.40	\$36.28	\$8,262.28
190	Drug Enforcement Fund	\$2,452.71	\$15.29	\$0.00	\$10.88	\$2,478.88
195	Low Income Housing Fund	\$50,724.88	\$1,101.12	\$0.00	\$228.54	\$52,054.54
300	Swimming Pool Const Fund, 1987	\$124,359.47	\$2,326.53	\$0.00	\$558.67	\$127,244.67
310	REET Capital Fund	\$117,812.10	\$0.00	\$13,337.10	\$460.72	\$104,935.72
320	Street Construction Capital Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
400	Water/Sewer Operating Fund	\$661,892.49	\$0.00	\$25,992.49	\$2,804.21	\$638,704.21
410	Regional Water System Fund	\$442,626.54	\$10,647.46	\$0.00	\$1,998.87	\$455,272.87
420	Stormwater Management Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
425	Stormwater Capital Reserve Fund	\$16,362.34	\$90.66	\$0.00	\$72.56	\$16,525.56
430	Regional Water Capital Improvement	\$70,358.88	\$2,856.12	\$0.00	\$322.86	\$73,537.86
435	Muni Water Capital Improvement	\$1,826,140.58	\$0.00	\$405,442.58	\$6,265.05	\$1,426,963.05
440	Water Bond Reserve Fund	\$169,355.92	\$2,576.08	\$0.00	\$758.19	\$172,690.19
450	Sewer Bond Reserve Fund	\$261,809.65	\$3,902.35	\$0.00	\$1,171.75	\$266,883.75
460	Sewer Loan Reserve Fund	\$16,362.34	\$90.66	\$0.00	\$72.56	\$16,525.56
463	Short Lived Asset Reserve Fund	\$38,453.12	\$210.88	\$0.00	\$170.50	\$38,834.50
470	Muni Sewer Capital Imprv Reserve	\$209,446.91	\$0.00	\$39,982.91	\$747.31	\$170,211.31
475	Boat Launch Facility Fund	\$35,177.40	\$0.00	\$16,256.40	\$83.44	\$19,004.44
631	Utility Deposit Fund	\$61,358.79	\$1,162.21	\$0.00	\$275.71	\$62,796.71
632	Transportation Benefit District Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
633	TBD Capital Project Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
634	State Custodial Pass-Thru Fund	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
		\$5,328,969.59	\$204,575.04	\$533,544.63	\$22,049.20	\$5,022,049.20

1. CALL TO ORDER

Mayor Paul Helenberg called the regular meeting of the Castle Rock City Council to order at 7:35 PM.

a. Pledge of Allegiance

Mayor Helenberg led the Pledge of Allegiance.

b. Roll Call

Councilmembers present: Art Lee, Lee Kessler, Earl Queen, Paul Simonsen, and Ellen Rose.

Staff present: Police Chief Charlie Worley, City Attorney Frank Randolph, Public Works Director Dave Vorse, Public Works Senior Operator Tyler Stone, City Engineer Tom Gower, and Clerk-Treasurer Carie Cuttonaro.

c. Changes to Agenda

2. PROCLAMATIONS & PRESENTATIONS

3. CITIZEN COMMENTS - maximum 3 minutes

4. DEPARTMENT REPORTS

- City Attorney Frank Randolph

- Police Chief Charlie Worley

Police Chief Charlie Worley gave a verbal report and provided a slide picture for viewing.

- Public Works Director Dave Vorse

- City Engineer Tom Gower

City Engineer Tom Gower gave a verbal report.

- Clerk-Treasurer Carie Cuttonaro

5. COUNCIL AND AD HOC COMMITTEE REPORTS

- Mayor / Mayor Pro-Tempore / Councilmembers

Councilmember Lee Kessler gave a verbal report.

Mayor Helenberg provided comment.

Public Works Director Dave Vorse provided comment.

- CRCDA Representative

6. PUBLIC HEARINGS

a. To take public testimony on the City's Six-Year Transportation Plan for fiscal years 2024-2029.
(page 3-10)

Mayor Paul Helenberg closed the regular meeting and opened the Public Hearing at 7:42 pm.
City Engineer Tom Gower presented.
Councilmember Lee provided comment.
Mayor Paul Helenberg provided comment.
There were no comments from the public.
Mayor Paul Helenberg closed the Public Hearing and opened the regular meeting at 7:45 pm.

7. CONSENT AGENDA

Councilmember Queen made a motion, seconded by Rose to approve the Consent Agenda as presented. Motion carried by roll call vote. Councilmembers Lee, Queen, Simonsen, and Rose voted 'Aye'. Councilmember Kessler abstained.

- a. Approve the minutes of the May 22, 2023 Regular Council Meeting. (page 11-13)
- b. Approve the May 2023 invoices as described in the Fund Transaction Summary Report in the amount of \$1,343,544.59. (page 14-15)

8. OLD BUSINESS

9. NEW BUSINESS

- a. Resolution No. 2023-02, a resolution relating to the Six-Year Transportation Improvement Plan. (page 16)

Councilmember Kessler made a motion, seconded by Queen to approve Resolution No. 2023-02. Motion carried by roll call vote. Councilmembers Lee, Kessler, Queen, Simonsen, and Rose voted 'Aye'.

- b. Special Event Permit #2023-0013; Castle Rock Fair Parade; July 13, 2023 at 6:00 PM. Insurance has not yet been received. Street closure request includes: (page 17-24)

- Huntington Ave S
- Cowlitz St W
- 2nd Ave SW
- B St SW
- Front Ave S

Clerk-Treasurer Carie Cuttonaro provided comment.
Public Works Director Dave Vorse provided comment.
Police Chief Charlie Worley provided comment.

Councilmember Rose made a motion, seconded by Kessler to approve Special Event Permit #2023-0013; Castle Rock Fair Parade, contingent on insurance. Motion carried by roll call vote. Councilmembers Lee, Kessler, Queen, Simonsen, and Rose voted 'Aye'.

- c. Interlocal Agreement for Prosecuting Services renewal with City of Kelso. Services in 2023 will cost \$29,335 plus additional costs for trials or appeals. (page 25-30)

Clerk-Treasurer Carie Cuttonaro provided comment.
Police Chief Charlie Worley provided comment.

Councilmember Kessler made a motion, seconded by Queen to approve the renewal of the Interlocal

Agreement for Prosecuting Services with the City of Kelso. Motion carried by roll call vote.
Councilmembers Lee, Kessler, Queen, Simonsen, and Rose voted 'Aye'.

10. OTHER BUSINESS

Cowlitz County Commissioner Rick Dahl provided comment.

11. ADJOURNMENT

There being no further business, Mayor Helenberg adjourned the meeting at 8:01 PM.

Mayor Paul Helenberg

Clerk-Treasurer Carie Cuttonaro


Joy Parker
414 Front Ave SW
360.259.9850

I am writing to address the walnut tree growing beyond a safe size. The year round mess is concerning to not only my family but to anyone traveling down Huntington Ave S.

If the city will allow a vehicle and flaggers on Huntington in the near future. I wish to remove branches growing over my garage.

At some point I would like to discuss removal of the tree completely. That would allow me to plant 2 or 3 Liquidamber sweetgum trees that would be less messy and beautify the street with vivid color changes thru the seasons.

Sincerely,

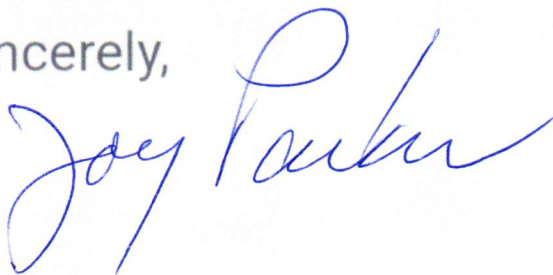

Received

KA

JAN 01 2023

Castle Rock
Finance





City of Castle Rock

PostBase® Vision

Semi-Auto S3

Proposal for: Carie Cuttonaro

Date: 06/15/23



Features

S3

5" color touchscreen	Yes
Motorized, tilting display	Yes
Semi-automatic envelope feeding	Yes
Processing speed (up to)	35 lpm
Integrated scale capacity	5lbs.
DIM rating capability	Yes
Rate wizard for USPS® postal products	Yes
Automatic USPS® postal rate updates	Yes
Integrated postage tape dispenser	Yes
Secure PIN protection	Yes
Custom rate shortcuts	6
Custom printable envelope graphics	30
Printable text messages or QR codes	12
Incoming mail "received" printing	Yes
Easy ink replacement	Yes
LAN and built-in Wi-Fi connectivity	Yes
Connected to discoverFP	Yes

Vision360

Postal analytics and reporting



Gain insight into your postal expenditures to better monitor, manage and control costs. Vision360 provides convenient online access to postal analytics and reporting for simple mail management. Conveniently view, print or download reports in PDF or Excel formats.

Stylish. Secure. Connected

PostBase® Vision embodies a modern, award winning design that integrates perfectly into any office environment. It is as functional as it is stylish.

Meticulously engineered with users in mind, this mailing system is intuitive and simple to use with a large color touchscreen so that any operator can process mail with ease. It is whisper quiet and comes in five designer colors to best suit the style of your office.

Configuration:

Investment Summary:

Postbase Vision S3, Semi Auto	\$49.95
Manual Sealer	Incl
Vision 360, 20 accounts	\$10.00 per mo.
First (6) months free, promo valid till 6/30/23	
63 month agreement, per month	\$59.95 p/mo.

Comments:

Price above does not include tax. The proposal estimated here is valid for 30 days.

June 12, 2023

David Vorse
Public Works Director
City of Castle Rock

RE: SWR Region-wide Pavement Preservation 2023-2025
Temporary Noise Exemption Request

Dear Mr. Vorse,

The Washington State Department of Transportation (WSDOT) would like to request a temporary nighttime noise exemption from the City of Castle Rock for a pavement maintenance project located on SR 504. The region-wide pavement preservation project will be completed between 2023 and 2025 with locations throughout southwest Washington, including portions of work located within the city limits of Castle Rock. Table 1 lists the location where work will occur. Night work may occur for safety reasons and to reduce traffic impacts.

Table 1:

State Route	Direction	Milepost	Township, Range, Section
504	Both	0 – 17.86	T9-0N R2-0W: S2, S11

We are requesting temporary relief from the requirements of Washington Administrative Code 173-60-040 through approval of a noise exemption as allowed under WAC 173-60-080. Such approval would permit WSDOT to construct road improvements within the City of Castle Rock between the hours of 8:00 pm to 6:00 am during the 2023-2025 construction seasons.

Project Description

Pavement repair activities will be completed by WSDOT Maintenance paving crews. The project will extend the service life of the existing pavement that is damaged due to rutting, cracking, and normal wear through pavement repair, including grind and inlay with Hot Mix Asphalt (HMA) and wheelpath asphalt patching. Road maintenance work will include pavement grinding, pavement repair, striping, and traffic control. All work will be limited to the roadway prism and existing impervious surface areas. There will be minimal impacts to vegetation and no soil disturbance as a result of project activities. Region-wide project construction is scheduled to begin July 2023 and is anticipated to be completed by June of 2025.

Anticipated Construction Equipment for Night Work

Types of equipment may include: pickups, dump trucks, paver, milling machines, rollers, sweepers, air compressors, generators, and back hoes. Stripers will place new pavement markings following project completion.

Proposed Nighttime Noise Mitigation

WSDOT is committed to reducing the inconvenience felt by those living near this project and will make reasonable efforts to minimize sound levels caused by nighttime work. To that end, WSDOT Maintenance crews will adhere to the following noise reduction measures:

1. All vehicles shall be equipped with ambient sensitive backup warning devices. WSDOT Maintenance crews may use back-up observers in lieu of back-up warning devices for all equipment except dump trucks in compliance with WAC Chapter 296- 155-160 and 296-155-615. WSDOT shall use back-up observers and back-up warning devices for dump trucks in compliance with WAC Chapter 296- 155-610.
2. To avoid excessive tailgate banging, all trucks will be secured as practicable.
3. A copy of the noise variance or exemption shall be kept on the project site with the WSDOT Maintenance crews
4. A WSDOT complaint number will be provided as well as a list of designated contact persons for the purpose of forwarding complaints.

The WSDOT Maintenance contact for the project is:

James Vavold, SW Region Maintenance Operations Support
11018 NE 51st Circle, Vancouver, WA 98682
(360) 905-2169, E-mail VavoldJ@wsdot.wa.gov

If your department receives a noise complaint, please help us resolve it by notifying the above WSDOT Maintenance contact within 24 hours of the complaint.

Should you have any questions or need more information, please feel free to contact Aidan McCready at 360-905-2000 or by e-mail at MccreaA@wsdot.wa.gov, or by mail at 11018 NE 51st Circle, Vancouver, WA 98668-1709.

Sincerely,



Angie Haffie
WSDOT SW Region Environmental Manager

AH: mh

Enclosures: Vicinity Map




Source: Esri, Maxar, Earthstar Geographics, and the GIS User Community

SWR - Strategic Pavement Preservation 23-25

SR 504, MP 0 - 17.86

Castle Rock




5/30/2023

Legend

- U.S. Interstate
- U.S. Highway
- State Route

Cities

- City Name

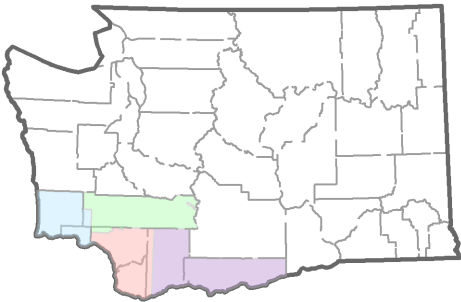

WSDOT Southwest Region, Washington State

Review / Authorization

Primary Responsible Department: Finance

Permit No. 2023-0014

Monster Trucks Most Wanted (Mt St Helens Motorcylce Club)

Greg Cronk 360.967.6056 - castlerockracepark@gmail.com

Reviewed by: (mark "X" & date upon review)

Comments and Conditions

☒ Finance Carie Cuttonaro, Clerk-Treasurer Date: 6/9/2023	No issues.
☒ Fire (Cowlitz County Fire District 6) Bill LeMonds, Fire Chief Date: 6/13/2023	6/13/2023 email from Bill - Traffic is my only concern. 6/21/2023 email from Bill - I think there will be some extra traffice but it shouldn't be terrible
☒ Police Charlie Worley, Chief Date: 6/14/2023	6/14/23 - Concur with Chief Lemonds. 6/22/23 - Spoke with Charlie; they may have some reserves come in just in case but he doesn't feel like there will be to much additional traffic for the events.
☒ Public Works / Engineering Dave Vorse, Public Works Director Date:	
☐ Parks	
☐ Streets	
☒ Traffic	Applicant needs to work with Police, Fire and WSDOT to come up with a traffic plan for SR 411.
☐ Other	
☐ Building/Planning, if needed	
Additional Comments: Per email from Greg 6/21/23 - Expecting small crowds over the 3 days. The club will provide traffic assistance and have posted up the 2 Westside Highway routes from the North and from the South for people to see as they are leaving. When the event is over, they are planning on directing traffic towards Westside Highway.	
☐ Approved ☐ Denied	Primary responsible department signature Date



Special Event Permit

Permit No. **2023-0014**

City of Castle Rock | Phone: 360.274.8181 | www.ci.castle-rock.wa.us

Application must be made a minimum of **60 days** prior to event (30 if a prior annual event)

Contact Information

Organization/Sponsor Mt. St. Helens m/c All American Entertainment		Address/City/State/Zip 75 Ph-10 Castle Rock, WA 98611 PO Box 555 Castle Rock, WA 98611	
Contact Person Greg Cronk Sr. / Jessie Heiple	Phone 360-967-6056	Email Castlerockracepark@gmail.com	
As contact person, are you authorized by the Organization/Sponsor to act on its behalf? ☒ YES ☐ NO		Address/City/State/Zip (if different from above) Phone 918-373-5406 Email jessie.heiple@aaeshowes.com	
Are there other individuals authorized to act on behalf of the Organization/Sponsor? Elden Hunter 360-431-2632		☒ YES ☐ NO If yes, please provide their name and contact information: 	

Event Information

Event Name Monster Trucks Most Wanted		Date(s) of event 7-22-23-2023		Estimated # of participants for event 3000
Start Time AM / PM	End Time AM / PM	Setup Time AM / PM	Takedown Time AM / PM	Estimated # of volunteers for event 30-50
Is this an annual event? ☐ YES ☒ NO* Applicant may be required to collect approval signatures from neighboring or affected residents and/or business owners.				
Have you previously requested a permit for such activity? NO				If yes, approximate date?
Are participants required to pay a fee? Yes			Are participants to make a donation? NO	
Will this event impede traffic? ☐ YES ☒ NO		Follow traffic, pedestrian and bike laws? ☐ YES ☒ NO		Utilize sidewalks only? ☐ YES ☒ NO
Details of event (Please include a detailed map showing location of event and copies of any proposed brochures, posters, flyers, or mailings you desire to use to advertise this event. Additionally, please identify on the map where volunteers will be placed to assist with this event. Include additional pages if needed to fully explain details. Monster Truck Show @ Castle Rock Race Park 120 Fair Ln. Castle Rock, WA. 98611				

Type of Use

Type of use requested ☐ Parade ☐ Street Closure ☐ Street Sale ☐ Athletic Run/Walk ☐ Block Party ☐ Other				
Where is use requested? ☐ Park area*/where? ☐ Park building*/which one? ☒ Private property/where? 120 Fair Ln ☐ Other				
*Note: If planning to use a park area or building, please contact the Public Works Department at 360.274.7478 for any additional forms required for the use of a park area or building.				
Please check all that apply to this event: ☐ Requesting closure/impediment of a street or public right-of-way. (Please attach a map and mark location.) ☐ Requesting to erect structure(s)/tent(s). Number and location ☒ Planning to serve food/drink. If yes, including alcohol beverages? ☒ YES ☐ NO ☒ This event involves political or religious activity intended primarily for the communication or expression of ideas. ☒ Participants will be required to pay a fee. ☐ Participants will be asked to make a donation.				
Permit holders are responsible for cleanup of debris in connection with their activities.				

Received

KA
MAY 16 2023
IP
Castle Rock
Finance

-1-

SCANNED

MAY 17 2023

Initial: _____

City Assistance Requested

Public Works Division (example: street closure, signage, signal adjustment, facility availability, additional sanitation/garbage, restrooms) - Explain	Police Department (example: traffic, patrol, security) - Explain <i>Traffic</i>
	Other - Explain

Insurance Information

The City does not maintain insurance that will respond to claims against the applicant arising out of the use of facilities by the applicant, its members, or those attending the event. Depending on the type of event you are planning, and the activity and risk level of your group, you may be required to obtain bodily injury and property damages liability insurance in accordance with City policy, name the City as an additional insured on the policy, and be responsible for obtaining said insurance. After reviewing this application, the City will determine whether you must obtain liability insurance.

Agreement

Depending on the type of event planned, you may be required to defend, indemnify and hold harmless the City, its agents, employees and officials, while acting within the scope of their duties, from all causes of action, demands and claims, including the cost of their defense, arising in favor of the organization, the organization's employees or third parties on account of personal injuries, bodily injuries, death, or damage to property arising out of the acts or omissions of the organization, its employees or representatives, concessionaires of the event or any other person or entity, except for liability caused due to the sole negligence of the City. After reviewing this application, the City will determine whether you must indemnify the City and its agents.

By my signature I state that I am authorized to obligate the above-titled Organization/Sponsor, including financially, for any statements or requests made herein.

Applicant Name (please print) <i>Greg Cronks</i>	Applicant Signature <i>[Signature]</i>
Organization/Title <i>MSHMC President</i>	Date <i>4-4-23</i>

Add additional information on separate sheets as needed.

City Use Only

Other permits required in conjunction with this permit:

☐ Electrical ☐ Fire, Life & Safety ☐ Parks ☐ Other: _____

Fees/Payments/Refunds

	Fee(s)	Initial(s)	Date(s)
Deposit(s)			
Permit(s)			
Facility Use/Rental(s)			
Admission Tax(es)			
Additional Costs			
TOTAL PAID			
TOTAL REFUND / DUE			

Proof of insurance required? ☐ Yes ☐ No	Bond Required? ☐ Yes ☐ No
---	---

Received

KA

MAY 16 2023

IP

Castle Rock
Finance

SEP 2023-0014

-2-
SCANNED

MAY 17 2023

Initial: _____

Castle Rock Race Park

MT St. Helens M/C Special Event Signature Collection Sheet

Event: Monster Trucks most wanted Date: 7-21-23
7-22-23 Time: 6pm to 10pm
7-23-23

By signing this paper, I am stating that I am either in favor or against the above listed event. Please write clearly.

Name	Signature	Business	Address	In Favor	Not in Favor
Melissa Harrison	Melissa Harrison	Dental Heating	125 Mosier Rd	X	
Ryan Moore	Ryan Moore	4 corners organics	151 middle rd	X	
Joe Golumbo	Joe Golumbo	4 corners Farm & Garden	70 PH 10	X	
Johnny Duarte	Johnny Duarte	Dollar General	78 PH-10	X	
Jessica GROTHEN	Jessica GROTHEN	Four corners General Station	4858 Westside Hwy	X	

Received

JP

MAY 17 2023

SEP 2023-0014

Castle Rock
Finance

JP

SCANNED

MAY 17 2023

Initial: _____



Gate 1 & 2 will Be locked
Gate 3 21 & older Entrance ID check

Received

40

MAY 17 2023

SEP 2023-0014

Castle Rock
Finance

IT

SCANNED

MAY 17 2023

Initial: _____



WAIVER of LIABILITY

HOLD HARMLESS - Applicant shall defend, indemnify and hold harmless the City of Castle Rock, its officers, officials, employees and volunteers from and against any and all claims, suits, actions, or liabilities for injury or death of any person, or for loss or damage to property, which arises out of the acts or omissions of the applicant, its employees, volunteers, representatives or vendors, or from any activity, work or thing done, permitted, or suffered by applicant, participant, or member of the public, related to the permitted activity, except only such injury or damage as shall have been occasioned by the sole negligence of the City of Castle Rock.

Organization: Mt. St. Helens m/c

Title of Event: Monster Trucks most wanted

Date of Event: 7-21,22,23-2023

Phone Number: 360-967-6056

Name of Applicant (please print): Greg Cronk Sr

Signature of Applicant: 

SCANNED

Date Signed: 5-8-23

Initial: _____

Received

for

MAY 17 2023

SEP 2023-0014

Castle Rock
Finance

IP



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

6-8-23

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Specialty Insurance, LTD. P.O. Box 16901 West Haven, CT 06516	CONTACT NAME: Thomas Plouffe	
	PHONE (A/C, No, Ext): 203-931-7095	FAX (A/C, No): 203-931-0682
INSURED All American Entertainment Productions, LLC P.O. Box 19866 Sarasota, FL 34276	E-MAIL ADDRESS: Certificates@specialtyinsuranceld.com	
	INSURER(S) AFFORDING COVERAGE	
	INSURER A: Northfield Insurance Company	
	INSURER B: Scottsdale Insurance Company	
	INSURER C:	
	INSURER D:	
INSURER E:		
INSURER F:		

COVERAGES **CERTIFICATE NUMBER:** **REVISION NUMBER:**

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	☒ COMMERCIAL GENERAL LIABILITY ☐ CLAIMS-MADE ☒ OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: ☒ POLICY ☐ PROJECT ☐ LOC OTHER:	X		WS508236	4/19/23	4/19/24	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000 MED EXP (Any one person) \$ Excluded PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000 \$
	AUTOMOBILE LIABILITY ☐ ANY AUTO ☐ ALL OWNED AUTOS ☐ HIRED AUTOS ☐ SCHEDULED AUTOS ☐ NON-OWNED AUTOS						COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
B	☐ UMBRELLA LIAB ☒ EXCESS LIAB ☐ DED ☐ RETENTION \$		X	CXS4002261	6/2/23	4/19/24	EACH OCCURRENCE \$ 3,000,000 AGGREGATE \$ 3,000,000 \$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below		Y/N N/A				PER STATUTE OTH-ER E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

City of Castle Rock, Castle Rock Fairgrounds and Mt.St.Helens M/C.dba Castle Rock Race Parks are added as an additional insured but only with respects to the operations of the named insured during the policy period.

Event dates: July 17-23, 2023

CERTIFICATE HOLDER Castle Rock Race Park 120 Fair Lane Castle Rock, WY 98611 SCANNED	CANCELLATION SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE
--	---

© 1988-2014 ACORD CORPORATION. All rights reserved.

ACORD 25 (2014/01) **JUN 13 2023** The ACORD name and logo are registered marks of ACORD

Initial:

**Washington State Liquor and Cannabis Board
Olympia, Washington**

SPECIAL OCCASION LICENSE

License Number: 090084

In accordance with and subject to the provisions of the Washington State Liquor Control Act and the rules and regulations of the Washington State Liquor and Cannabis Board:

**MT ST HELENS MOTORCYCLE CLUB
C/O: GREG CRONK SR
75 PH-10
CASTLE ROCK, WA 98611**

is hereby licensed to sell, beer, wine, and spirituous liquor to be consumed on site only at the location, date(s), and time(s) listed below:

CASTLE ROCK RACE PARK - 120 FAIR LANE, CASTLE ROCK

JULY 21, 2023	3 PM TO 9 PM
JULY 22, 2023	12 PM TO 9 PM
JULY 23, 2023	11 AM TO 4 PM

No one under the age of 21 may buy, consume, or possess alcohol at any time.

No one under the age of 21 may enter the enclosed area where alcohol is being served.

You must ask for approved identification from all people who order alcohol.

RESTRICTIONS--BEER & WINE CONSUMPTION ONLY. NO SPIRITS FOR OFF OR ON PREMISES CONSUMPTION!

Per RCW 66.28.090, the licensed premises shall, at all times, be open to any enforcement officer, inspector, or peace officer.

If you have any questions, please contact Customer Service at (360) 664-1600, email: specialoccasions@lcb.wa.gov, or your Enforcement Officer at (253) 471-5200.

Dated in Olympia, Washington on Wednesday, June 21, 2023.

David Postman

Board Chair

chart@ci.castle-rock.wa.us

Received email from MSHMC 6/21/23

From: greg cronk sr <castlerockracepark@gmail.com>
Sent: Wednesday, June 21, 2023 9:58 AM
To: Celina Hart
Subject: Fwd: 090084-2R MT ST HELENS MOTORCYCLE CLUB: Special Occasion License Restrictions
Attachments: image001.png; 090084 - 2R - MT ST HELENS MOTORCYCLE CLUB - 07.21.23.pdf

----- Forwarded message -----

From: Special Occasion Correspondence (LCB) <specialoccasions@lcb.wa.gov>
Date: Wed, Jun 21, 2023, 9:49 AM
Subject: 090084-2R MT ST HELENS MOTORCYCLE CLUB: Special Occasion License Restrictions
To: CASTLEROCKRACEPARK@GMAIL.COM <CASTLEROCKRACEPARK@gmail.com>
Cc: Higbee, Kelly S (LCB) <kelly.higbee@lcb.wa.gov>, Madtson, Marvin (LCB) <marvin.madtson@lcb.wa.gov>

PLEASE NOTE:

There are restrictions to this license per the Local Authority. Please confirm that you understand and acknowledge these restrictions for your event and respond directly to this email.

RESTRICTIONS--BEER & WINE CONSUMPTION ONLY. NO SPIRITS FOR OFF OR ON PREMISES CONSUMPTION!

Greetings,

Attached is your Special Occasion License; post this at the serving location(s) of your event.

Please reply directly to this email to confirm that this has been received.

Thank you and have a great event!

Andrea Stevens



Customer Service Specialist 2

Licensing and Regulations

1025 Union Ave SE | Olympia, Washington 98501

Ph: 360.664.1628 | Email: andrea.stevens@lcb.wa.gov

If you have a moment to tell us what we did well or what we could improve on, please fill out the following survey:
<https://www.surveymonkey.com/r/WSLCBCustomerService> Please check out the upcoming [Licensing Classes](#) and get your questions answered in real time.

Cowlitz County

Department of Public Works

**CONTRACT DOCUMENTS
FOR**

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Cowlitz County Project No. 2023

APRIL 2023

COWLITZ COUNTY
Department of Public Works
1600-13th Avenue South
Kelso, Washington 98626
Phone (360) 577-3030

BOARD OF COUNTY COMMISSIONERS

ARNE MORTENSEN	District No. 1
DENNIS P. WEBER	District No. 2
RICHARD R. DAHL	District No. 3

Cowlitz County

Department of Public Works

**CONTRACT DOCUMENTS
FOR**

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Cowlitz County Project No. 2023


APRIL 2023



Responsible for all portions of the Contract Documents

COWLITZ COUNTY
Department of Public Works
1600-13th Avenue South
Kelso, Washington 98626
Phone (360) 577-3030

Approved by:


Susan Eugenis, P.E.
County Engineer

4/19/23
Date

TABLE OF CONTENTS **2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT**

CALL FOR BIDS	Page 1
BIDDER’S CHECKLIST	Page 3
BID PROPOSAL	Page 5
INSTRUCTIONS TO BIDDERS.....	Page 5
PROPOSAL.....	Page 7
NON-COLLUSION DECLARATION	Page 11
PROPOSAL FOR INCORPORATING RECYCLED MATERIALS INTO THE PROJECT	Page 12
PAVING CONTRACTOR’S PROJECT INFORMATION QUESTIONNAIRE	Page 13
BID DEPOSIT FORM	Page 14
E-VERIFY DECLARATION	Page 15
COMPLIANCE WITH WAGE PAYMENT LAWS DECLARATION	Page 16
CONTRACTING AGENCY DOCUMENTS	Page 17
COWLITZ COUNTY – AGREEMENT	Page 18
PERFORMANCE BOND	Page 22
CITY OF WOODLAND – AGREEMENT AND BONDS***	Page 23
CITY OF CASTLE ROCK – AGREEMENT AND BONDS***	Page 24
SPECIAL PROVISIONS	Page 25
DIVISION 1 – GENERAL REQUIREMENTS	Page 26
BID ITEMS	Page 60
BID ITEMS 1, 14 and 22: MISCELLANEOUS CONSTRUCTION	Page 60
BID ITEMS 2, 15 and 23: MOBILIZATION	Page 60
BID ITEMS 3, 16 and 24: FLAGGERS	Page 61
BID ITEM 4: CONTRACTOR PILOTED TRAFFIC CONTROL	Page 61
BID ITEM 5: HMA CLASS 3/8 INCH - PG 58H-22 (CASTLE ROCK AREA).....	Page 64
BID ITEM 6: HMA CLASS 3/8 INCH - PG 58H-22 (KALAMA AREA)	Page 64
BID ITEM 7: HMA CLASS 3/8 INCH - PG 58H-22 (KELSO AREA)	Page 64
BID ITEM 8: HMA CLASS 3/8 INCH - PG 58H-22 (LONGVIEW AREA)	Page 64
BID ITEMS 17 AND 25: HMA CLASS 3/8-inch PG-58H-22	Page 64
BID ITEM 9: HMA CLASS 3/8 INCH - PG 58H-22 FOR APPROACH.....	Page 64
BID ITEMS 10 and 78: PLANING BITUMINOUS PAVEMENT	Page 64
BID ITEMS 11, 19 AND 26: ASPHALT COST PRICE ADJUSTMENT.....	Page 64
BID ITEMS 12, 20 AND 27: ADJUSTING MANHOLES.....	Page 94
BID ITEMS 13 AND 21: ADJUSTING VALVE BOXES/MONUMENT CASES	Page 94
STANDARD PLANS	Page 97
PREVAILING MINIMUM HOURLY WAGE RATES***	Page 106
APPENDICES	Page 107
Appendix A – Pavement Overlay Tonnages/Locations***	Page 108
Appendix B – WSDOT Work Zone Traffic Control Standard Plans***	Page 109
CALL BEFORE YOU DIG	Page 110

***Included as indicated but numbered independently.

CALL FOR BIDS

The Board of County Commissioners of Cowlitz County, Washington will receive sealed bids until **May 16, 2023, prior to 11:00 a.m.**, for the following work: **2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT.**

Work performed under this contract consists of the following:

Pavement planing and hot mix asphalt overlay paving of various roads within the participating agencies' jurisdictions, and associated work.

At that time all bids will be publicly opened and read in the Board's hearing room. Bids must be addressed to:

Board of County Commissioners
Attn: Clerk of the Board
207 Fourth Avenue North
Kelso WA 98626

Project bid documents (Plans, specifications, addenda, bid documents, bidders list and plan holders list) for this project are available online for inspection during the bidding period through the Builders Exchange of Washington (BXWA) website at www.bxwa.com. Click on Posted Projects, then Public Works, then Cowlitz County and then Projects Bidding. These documents are available for viewing, downloading and printing on your own equipment free of charge. This service is provided to Prime Bidders, Subcontractors, and Vendors bidding on this project. Bidders will need to "Register as a Bidder" through the BXWA in order to receive automatic e-mail notification of future addenda and to be placed on the Bidders List. Bidders should contact Builder's Exchange of Washington at (425) 258-1303 for questions regarding access or registration.

It is the sole responsibility of the Bidder to obtain Addenda, if any. Addenda information will be available on the BXWA web site at www.bxwa.com. Cowlitz County accepts no responsibility or liability and will provide no accommodation to bidders who fail to check for addenda and thereby submit inadequate or incomplete responses.

Cowlitz County will not provide paper copies of the Project bid documents for this project for bidding purposes. A copy of the plans and specifications may be reviewed at the office of the Clerk of the Board of County Commissioners.

All bid proposals shall be accompanied by a bid proposal deposit in cash, certified check, cashier's check, or surety bond in an amount equal to five percent (5%) of the amount of such bid proposal. Should the successful bidder fail to enter into such contract and furnish

satisfactory performance bond within the time stated in the specifications, the bid proposal deposit shall be forfeited to Cowlitz County.

All documents received in response to this invitation to bid will become a matter of public record and subject to the Washington public disclosure act under chapter 42.56 RCW.

Cowlitz County, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that in any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

The Board reserves the right to reject any and all bids and to waive any immaterial irregularities or informalities in any bid or in the bidding.

DATED this 25th day of April, 2023.

BOARD OF COUNTY COMMISSIONERS
OF COWLITZ COUNTY, WASHINGTON



Richard R. Dahl, Chairman




Arne Mortensen, Commissioner



Dennis P. Weber, Commissioner



ATTEST:



Kelly Dombrowsky, Clerk of the Board

4/25/23

BIDDER'S CHECKLIST

(Informational only – not required to be submitted with the BID)

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Name of Project

ITEMS TO BE INCLUDED WITH BID

The following checked items are required to be completed and submitted with the BID, except as noted otherwise:

Required if Checked:

- ☒ 1. PROPOSAL FORM – To be completed and signed by bidder. Provide all information pertaining to BIDDER'S organization on the first page. Fill in all unit prices and amounts for each bid item. Fill in all subtotals, sales tax and the total bid amount in the spaces provided. List the addenda in the spaces provided to indicate acknowledgement. Sign, date, and provide requested information in the spaces provided on the last page.
- ☐ 2. CERTIFICATION OF APPRENTICESHIP – In the spaces provided on the PROPOSAL FORM, provide information on the BIDDER'S Apprenticeship Programs.
- ☒ 3. NON-COLLUSION DECLARATION – required on all projects.
- ☒ 4. PROPOSAL FOR INCORPORATING RECYCLED MATERIALS INTO THE PROJECT – required on all road construction projects.
- ☐ 5. CERTIFICATION FOR FEDERAL AID CONTRACTS – required on FHWA-funded projects.
- ☐ 6. UNDERUTILIZED DISADVANTAGED BUSINESS ENTERPRISE UTILIZATION CERTIFICATION – required on FHWA-funded projects with a goal of greater than 0%.
- ☐ 7. UNDERUTILIZED DISADVANTAGED BUSINESS ENTERPRISE (UDBE) WRITTEN CONFIRMATION DOCUMENT – required on FHWA-funded projects with a goal of greater than 0%. This form is required to be submitted within 24 hours after the time for delivery of the bid proposal.
- ☐ 8. LOCAL AGENCY SUBCONTRACTOR LISTS – To be filled in and signed by BIDDER.
- ☒ 9. CONTRACTOR'S PROJECT INFORMATION STANDARD QUESTIONNAIRE - The BIDDER shall complete this form.
- ☒ 10. BID DEPOSIT FORM - This form is to be executed by the BIDDER and the Surety Company unless bid is accompanied by cash, cashier's check, or a certified check. The amount of the deposit or bid bond shall be not less than 5% of the total amount of the bid and may be shown in dollars or on a percentage basis. Bid Bond forms other than the enclosed form may

be accepted providing it has been approved by the OWNER prior to bid submittal.

- ☒ 11. E-VERIFY DECLARATION – The BIDDER shall complete and sign this form.
- ☒ 12. CERTIFICATION OF COMPLIANCE WITH WAGE PAYMENT STATUTES – The BIDDER shall complete and sign this form. This form is required to be submitted within 24 hours after the time for delivery of the bid proposal.

PROPOSAL FORM

TO: Board of County Commissioners
County Administration Building
207 Fourth Avenue North, 3rd Floor
Kelso, WA 98626

FOR: 2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT
Name of Project

FROM: <u>Lakeside Industries Inc.</u>	<u>PO Box 576</u>
Bidder's Business Name	Mailing Address
<u>Maleko.galusha@lakesideindustries.com</u>	<u>Longview, WA 98632</u>
Email Address	City, State and Zip
<u>Maleko Galusha</u>	<u>360-423-6882</u>
Name of Bidder's Representative for Bid	Telephone
<u>LAKESI*274JD</u>	<u>91-0751657</u>
Washington Registration No.	Tax I.D. No.
<u>415422-003</u>	<u>601 106 847</u>
Employment Security Department No.	State Excise Tax Registration No.
<u>700-227</u>	<u>601 106 847</u>
Industrial Insurance Coverage Account No.	UBI No.

INSTRUCTIONS TO BIDDERS

1. Contract Documents. See Section 1-04.2 of the Special Provisions for a list of the "contract documents" that make up the contract. Be sure that you have a copy of the **2023** Standard Specifications for Road, Bridge, and Municipal Construction, by the Washington State Department of Transportation and the American Public Works Association, Washington State Chapter. Such specifications are sometimes referred to as the "Standard Specifications."

2. Submission of Bid. Fill out this Proposal Form completely, in accordance with Section 1-02.6 of the Standard Specifications. Enclose your Proposal Form and bid deposit in an opaque sealed

envelope addressed to:

Cowlitz County Board of County Commissioners
Attn: Clerk of the Board
County Administration Building, 3rd Floor
207 Fourth Avenue North
Kelso, WA 98626

Mark the outside of the envelope with the name of the bidder, the name of the project, and the date and time of the bid opening. It is your responsibility to make sure that your bid is physically received by the Clerk of the Board by the time set for the bid opening. Bids not so received will not be considered. Bids may not be submitted by facsimile machine.

The County's determination of when a bid was received shall be final and non-appealable.

3. Bidder Responsibility Standards. It is the intent of the Owner to award a contract to the lowest, responsible and responsive bidder for all described Work. Before award, the bidder must meet all criteria and satisfy all requirements of the following bidder-responsibility standards to be considered a responsible and a responsive bidder. The bidder may be required by the Owner to submit documentation demonstrating compliance with these standards to be qualified to be awarded a contract. The bidder must:

- a. Have a current certificate of registration as a contractor in compliance with chapter 18.27 RCW, which must have been in effect at the time of bid submittal;
- b. Have a current Washington Unified Business Identifier (UBI) number;
- c. If applicable:
 - i. Have Industrial Insurance (workers' compensation) coverage for the bidder's employees working in Washington, as required in Title 51 RCW;
 - ii. Have a Washington Employment Security Department number, as required in Title 50 RCW;
 - iii. Have a Washington Department of Revenue state excise tax registration number, as required in Title 82 RCW;
- d. Not be disqualified from bidding on any public works contract under RCW 39.06.010 or 39.12.065(3).

4. Execution of Contract. The successful bidder must use the performance bond form and other forms provided by Cowlitz County to be considered both a responsible and responsive bidder.

5. Prequalification. Cowlitz County has no prequalification requirements. All provisions in the Standard Specifications relating to prequalification are deleted. See Paving Contractors Project

Information Standard Questionnaire (attached with Bid Documents), for requirements necessary to be considered a qualified bidder.

6. Paving Contractor's Project Information Standard Questionnaire. Cowlitz County requires qualification of all bidders for this project to ensure award to the lowest and best bidder (RCW 36.77.040). All bidders are required to complete the Paving Contractor's Project Information Standard Questionnaire attached hereto. Failure to complete the Standard Questionnaire will result in the proposal being non-responsive, and irregular and rejected as per Section 1-02.13 of the Standard Specifications. The bidder should list a minimum of three jobs requiring 7,000 tons or more of hot mix asphalt paving completed during the timeframe specified on the Paving Contractor's Project Information Standard Questionnaire. If the bidder proposes placement of the asphalt pavement by a subcontractor, the subcontractor shall complete the Standard Questionnaire. The minimum requirements for the subcontractor shall be the same as for the Contractor.

7. Sales Tax Code. In computing and reporting sales taxes payable to the Washington State Department of Revenue on this project, the following code number shall be used: **0800**.

PROPOSAL

The undersigned bidder proposes to perform the project named above in strict compliance with the contract documents, for the following amounts:

Item No.	Approximate Quantity	ITEM	UNIT PRICE \$	AMOUNT \$
SCHEDULE A – COWLITZ COUNTY ROADS				
1	Force Account	Miscellaneous Construction	10,000.00	10,000.00
2	Lump Sum	Mobilization	44,500. ⁰⁰	44,500. ⁰⁰
3	720 Hours	Flaggers	70. ⁰⁰	50,400. ⁰⁰
4	160 Hours	Contractor Piloted Traffic Control	85. ⁰⁰	13,600. ⁰⁰
5	4,971 Tons	HMA Class 3/8 Inch - PG 58H-22 (Castle Rock Area)	122. ⁰⁰	606,402. ⁰⁰
6	2,224 Tons	HMA Class 3/8 Inch - PG 58H-22 (Kalama Area)	128. ⁰⁰	284,672. ⁰⁰

606,402.⁰⁰

Item No.	Approximate Quantity	ITEM	UNIT PRICE \$	AMOUNT \$
7	2,548 Tons	HMA Class 3/8 Inch - PG 58H-22 (Kelso Area)	120. ⁰⁰	305,760. ⁰⁰
8	3,279 Tons	HMA Class 3/8 Inch - PG 58H-22 (Longview Area)	128. ⁰⁰	419,712. ⁰⁰
9	30 Ton	HMA Class 3/8 Inch PG 58H-22 For Approach	250. ⁰⁰	7,500. ⁰⁰
10	14,508 S.Y.	Planing Bituminous Pavement	4. ⁵⁰	65,286. ⁰⁰
11	Calculation	Asphalt Cost Price Adjustment	0.00	0.00
12	12 Each	Adjusting Manholes	400. ⁰⁰	4,800. ⁰⁰
13	54 Each	Adjusting Valve Boxes/Monument Cases	300. ⁰⁰	16,200. ⁰⁰

SUBTOTAL SCHEDULE A.....\$ 1,828,832.⁰⁰
1,828,892.⁰⁰

Item No.	Approximate Quantity	ITEM	UNIT PRICE \$	AMOUNT \$
SCHEDULE B – CITY OF WOODLAND ROADS				
14	Force Account	Miscellaneous Construction	10,000.00	10,000.00
15	Lump Sum	Mobilization	6,250. ⁰⁰	6,250. ⁰⁰
16	100 Hours	Flaggers	70. ⁰⁰	7,000. ⁰⁰
17	729 Ton	HMA Class 3/8 Inch - PG 58H-22	125. ⁰⁰	91,125. ⁰⁰
18	8,129 S.Y.	Planing Bituminous Pavement	3. ⁵⁰	28,451. ⁵⁰
19	Calculation	Asphalt Cost Price Adjustment	0.00	0.00

Item No.	Approximate Quantity	ITEM	UNIT PRICE \$	AMOUNT \$
20	14 Each	Adjusting Manholes	400.00	5,600.00
21	15 Each	Adjusting Valve Boxes/Monument Cases	300.00	4,500.00

SUBTOTAL SCHEDULE B\$ 152,926.50

Item No.	Approximate Quantity	ITEM	UNIT PRICE \$	AMOUNT \$
SCHEDULE C – CITY OF CASTLE ROCK ROADS				
22	Force Account	Miscellaneous Construction	10,000.00	10,000.00
23	Lump Sum	Mobilization	4,300.00	4,300.00
24	40 Hours	Flaggers	70.00	2,800.00
25	128 Tons	HMA Class 3/8 Inch - PG 58H-22	250.00	32,000.00
26	Calculation	Asphalt Cost Price Adjustment	0.00	0.00
27	1 Each	Adjusting Manholes	400.00	400.00

SUBTOTAL SCHEDULE C\$ 49,500.00

TOTAL SCHEDULES A, B AND C\$ 2,031,258.50
2,031,318.50

Addenda. The bidder acknowledges receipt of the following addenda: 1, 2, _____, _____, and _____. (Insert numbers of any addenda received.)


Non-Collusion. Each bidder must submit a declaration of non-collusion completely executed with their bid. Reasonable grounds for believing that any bidder(s) have engaged, either directly or indirectly, into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with this bid will cause rejection of all proposals which said

bidder(s) has shown interest, and none of the participants to such direct or indirect actions will be considered.

The person(s) signing this bid on behalf of the bidder declare(s) under penalty of perjury under the laws of the United States and the State of Washington that this bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action, in restraint of free competitive bidding in connection with this bid.

5/16/2023

Date



Signature of Person Authorized to Bind Bidder

Lakeside Industries Inc.

Bidder's Business Name

Maleko Galusha - PM

Title of Person Signing Bid

Signed in Longview, Washington

Failure to return this Declaration as part of the bid proposal package will make the bid nonresponsive and ineligible for award.

NON-COLLUSION DECLARATION

I, by signing the proposal, hereby declare, under penalty of perjury under the laws of the United States that the following statements are true and correct:

1. That the undersigned person(s), firm, association or corporation has (have) not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the project for which this proposal is submitted.
2. That by signing the signature page of this proposal, I am deemed to have signed and to have agreed to the provisions of this declaration.

NOTICE TO ALL BIDDERS

To report rigging activities call:

1-800-424-9071

The U.S. Department of Transportation (USDOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m., eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of USDOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the USDOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

DOT Form 272-0361 EF
07/2011

Proposal for Incorporating Recycled Materials into the Project

In compliance with a new law that went into effect January 1, 2016 (SHB1695), the Bidder shall propose below, the total percent of construction aggregate and concrete materials to be incorporated into the Project that are recycled materials. Calculated percentages must be within the amounts allowed in Section 9-03.21(1)E, Table on Maximum Allowable Percent (By Weight) of Recycled Material, of the Standard Specifications.


Proposed total percentage: 15 percent.

Note: Use of recycled materials is highly encouraged within the limits shown above, but does not constitute a Bidder Preference, and will not affect the determination of award, unless two or more lowest responsive Bid totals are exactly equal, in which case proposed recycling percentages will be used as a tie-breaker, per the APWA GSP in Section 1-03.1 of the Special Provisions. Regardless, the Bidder's stated proposed percentages will become a goal the Contractor should do its best to accomplish. Bidders will be required to report on recycled materials actually incorporated into the Project, in accordance with the APWA GSP in Section 1-06.6 of the Special Provisions.

Bidder:

Lakeside Industries Inc.

Signature of Authorized Official:



Date:

5/16/2023

**Paving Contractor's Project Information
Standard Questionnaire**

This Information must be provided to be considered a qualified bidder.

1. How many years has your organization been in business as a paving contractor under your present business name? <u>62</u>					
2. List at least three paving projects your company has satisfactorily completed since January 1, 2018. Only list projects that used 7,000 tons or more.					
	Contract Tonnage	Compl. Date	Prime or Sub.	Title/Contract Number	Contracting Agency and Mailing Address, Name and Phone of Owner/Agency Rep.
2a.	8,374	July 2022	Prime	2022 Countywide Overlay Project	Cowlitz County Public Works 1600 13th Ave. S Kelso, WA 98626 Gary Gonser 360-577-3030
2b.	10,441	July 2021	Prime	2021 Countywide Overlay Project	Cowlitz County Public Works 1600 13th Ave. S Kelso, WA 98626 Gary Gonser 360-577-3030
2c.	14,000	July 2020	Prime	2020 Countywide Overlay Project	Cowlitz County Public Works 1600 13th Ave. S Kelso, WA 98626 Gary Gonser 360-577-3030
2d.	15,380	July 2019	Prime	2019 Countywide Overlay Project	Cowlitz County Public Works 1600 13th Ave. S Kelso, WA 98626 Gary Gonser 360-577-3030
2e.	10,673	2018	Prime	WSDOT East Fork to Weigh Station	WSDOT Southwest Region 11018 NE 51st Circle Vancouver, WA 98682-6886 Joanna Lowry 360-619-0610

BID DEPOSIT FORM

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Name of Project

Lakeside Industries, Inc.

Name of Bidder

The bidder named above hereby submits its bid deposit in the form of a certified check, cashier's check, cash or bid bond in the amount of \$ 101,562.13, which amount is not less than five (5) percent of the total bid for all three schedules.

PROPOSAL BOND

KNOW ALL MEN BY THESE PRESENTS, That we, Lakeside Industries, Inc. as Principal and Travelers Casualty and Surety* a corporation duly organized under the laws of the state of Connecticut and authorized to do business in the State of Washington, as Surety, are held and firmly bound unto Cowlitz County as Obligee, in the full and penal sum of five (5) percent of the total amount of the bid proposal of said Principal for the work hereinafter described, for the payment of which the Principal and the Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, by these presents. *Company of America

The condition of this bond is such, that whereas the Principal herein is herewith submitting his or its sealed proposal for the following public works project, to wit: 2023 Joint Agency Pavement Overlay - Project No. 2023

Said bid and proposal, by reference thereto, being made a part hereof.

NOW, THEREFORE, If the said proposal bid by said Principal be accepted, and the contract be awarded to said Principal, and if the said Principal shall duly make and enter into and execute said contract and shall furnish bond as required by the contract documents within a period of ten (10) days from and after said award, exclusive of the day of such award, then this obligation shall be null and void, otherwise it shall be and remain in full force and effect.

SIGNED AND SEALED this 16th day of May, 2023.

Lakeside Industries, Inc.

Name of Bidder


Authorized Signature


MALEKO GALUSHA - PM
Title

May 16, 2023

Date

Travelers Casualty and Surety Company of America

Name of Surety


Authorized Signature*

Susan B. Larson, Attorney-in-Fact

Title



*Attach Power of Attorney



**Travelers Casualty and Surety Company of America
Travelers Casualty and Surety Company
St. Paul Fire and Marine Insurance Company**

POWER OF ATTORNEY


KNOW ALL MEN BY THESE PRESENTS: That Travelers Casualty and Surety Company of America, Travelers Casualty and Surety Company, and St. Paul Fire and Marine Insurance Company are corporations duly organized under the laws of the State of Connecticut (herein collectively called the "Companies"), and that the Companies do hereby make, constitute and appoint **Susan B. Larson** of **BELLEVUE**, **Washington**, their true and lawful Attorney(s)-in-Fact to sign, execute, seal and acknowledge any and all bonds, recognizances, conditional undertakings and other writings obligatory in the nature thereof on behalf of the Companies in their business of guaranteeing the fidelity of persons, guaranteeing the performance of contracts and executing or guaranteeing bonds and undertakings required or permitted in any actions or proceedings allowed by law.

IN WITNESS WHEREOF, the Companies have caused this instrument to be signed, and their corporate seals to be hereto affixed, this **21st** day of **April**, **2021**.



State of Connecticut


City of Hartford ss.


By: 
Robert L. Raney, Senior Vice President

On this the **21st** day of **April**, **2021**, before me personally appeared **Robert L. Raney**, who acknowledged himself to be the Senior Vice President of each of the Companies, and that he, as such, being authorized so to do, executed the foregoing instrument for the purposes therein contained by signing on behalf of said Companies by himself as a duly authorized officer.

IN WITNESS WHEREOF, I hereunto set my hand and official seal.

My Commission expires the **30th** day of **June**, **2026**




Anna P. Nowik, Notary Public

This Power of Attorney is granted under and by the authority of the following resolutions adopted by the Boards of Directors of each of the Companies, which resolutions are now in full force and effect, reading as follows:

RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President, any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary may appoint Attorneys-in-Fact and Agents to act for and on behalf of the Company and may give such appointee such authority as his or her certificate of authority may prescribe to sign with the Company's name and seal with the Company's seal bonds, recognizances, contracts of indemnity, and other writings obligatory in the nature of a bond, recognizance, or conditional undertaking, and any of said officers or the Board of Directors at any time may remove any such appointee and revoke the power given him or her; and it is

FURTHER RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President may delegate all or any part of the foregoing authority to one or more officers or employees of this Company, provided that each such delegation is in writing and a copy thereof is filed in the office of the Secretary; and it is

FURTHER RESOLVED, that any bond, recognizance, contract of indemnity, or writing obligatory in the nature of a bond, recognizance, or conditional undertaking shall be valid and binding upon the Company when (a) signed by the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary and duly attested and sealed with the Company's seal by a Secretary or Assistant Secretary; or (b) duly executed (under seal, if required) by one or more Attorneys-in-Fact and Agents pursuant to the power prescribed in his or her certificate or their certificates of authority or by one or more Company officers pursuant to a written delegation of authority; and it is

FURTHER RESOLVED, that the signature of each of the following officers: President, any Executive Vice President, any Senior Vice President, any Vice President, any Assistant Vice President, any Secretary, any Assistant Secretary, and the seal of the Company may be affixed by facsimile to any Power of Attorney or to any certificate relating thereto appointing Resident Vice Presidents, Resident Assistant Secretaries or Attorneys-in-Fact for purposes only of executing and attesting bonds and undertakings and other writings obligatory in the nature thereof, and any such Power of Attorney or certificate bearing such facsimile signature or facsimile seal shall be valid and binding upon the Company and any such power so executed and certified by such facsimile signature and facsimile seal shall be valid and binding on the Company in the future with respect to any bond or understanding to which it is attached.

I, **Kevin E. Hughes**, the undersigned, Assistant Secretary of each of the Companies, do hereby certify that the above and foregoing is a true and correct copy of the Power of Attorney executed by said Companies, which remains in full force and effect.

Dated this **16th** day of **May**, **2023**.




Kevin E. Hughes, Assistant Secretary

**To verify the authenticity of this Power of Attorney, please call us at 1-800-421-3880.
Please refer to the above-named Attorney(s)-in-Fact and the details of the bond to which this Power of Attorney is attached.**

E-VERIFY DECLARATION

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Cowlitz County Project No. 2023


Firm Name: Lakeside Industries Inc.

The undersigned declares, under **penalty of perjury** under the laws of Washington that:

1. That the above-named firm is currently enrolled in and using the E-Verify system implemented on October 25, 2011, as outlined in Resolution No. 11-118 and will continue to use the E-Verify system for so long as work is being performed on the above named project.
2. I certify that I am duly authorized to sign this declaration on behalf of the above-named bidder/proposer.
3. I acknowledge that Cowlitz County reserves the right to require a copy of the Memorandum of Understanding between the contractor listed above and the Department of Homeland Security certifying enrollment in the E-Verify program at any time. Failure to provide the required Memorandum of Understanding within 10 days of request could lead to suspension of this contract.

Dated at Longview, State of WA on this 16th day of May, 2023.

Signature



Printed Name Maleko Galusha - PM

THIS PAGE MUST BE RETURNED WITH THE BID DOCUMENTS

COMPLIANCE WITH WAGE PAYMENT LAWS DECLARATION

2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT

Cowlitz County Project No. 2023

Firm Name: Lakeside Industries Inc.

1. The bidder hereby certifies that, within the three-year period immediately preceding the bid solicitation date April 25, 2023, the bidder is not a "willful" violator, as defined in RCW 49.48.082, of any provision of chapters 49.46, 49.48, or 49.52 RCW, as determined by a final and binding citation and notice of assessment issued by the Department of Labor and Industries or through a civil judgment entered by a court of limited or general jurisdiction.
2. I certify that I am duly authorized to sign this declaration on behalf of the above-named bidder/proposer.
3. I acknowledge that Cowlitz County is required to receive this declaration as a condition to awarding the public works contract pursuant to RCW 39.04.350.

The undersigned declares, under penalty of perjury under the laws of Washington, that the foregoing is true and correct.

Signed and dated at Longview, in State of WA, on this 16th day of May 2023.

Signature 

Printed Name Maleko Galusha - PM

THIS PAGE MUST BE RETURNED BEFORE THE PUBLIC WORKS CONTRACT CAN BE AWARDED

CONTRACTING AGENCIES:

COWLITZ COUNTY AGREEMENT FORM AND PERFORMANCE BOND

AGREEMENT

THIS AGREEMENT is entered into between **COWLITZ COUNTY** and **LAKESIDE INDUSTRIES** ("Contractor") for the following project: **2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT** ("the Project").

The Parties Agree as Follows:

1. Acceptance of Bid Proposal. Cowlitz County accepts Contractor's bid proposal for the Project. Such acceptance is limited to the following items of the bid proposal: **1-13 (Schedule A)**.

2. Contractor to Accomplish Project. Contractor shall do all work and furnish all labor, materials, equipment, tools, services, and incidentals necessary to accomplish the Project in strict compliance with the contract documents.

3. Contract Amount. Cowlitz County shall pay Contractor in accordance with the contract documents, based on the unit prices and lump sums stated in the Proposal Form. The total contract amount for the Project shall not exceed **\$2,031,318.50**, including sales taxes.

4. Contract Documents. (a) This Agreement shall be governed by and incorporates by reference the **2023** Standard Specifications for Road, Bridge, and Municipal Construction, by the Washington State Department of Transportation and the American Public Works Association, Washington State Chapter (the "Standard Specifications"). All provisions of the Standard Specifications apply unless specifically modified herein. (b) The contract documents constitute the parties' entire and integrated agreement concerning the Project, and supersede all prior and contemporaneous negotiations, representations, or agreements, both written and oral.

5. Contractor Registration. By submitting a bid, each bidder warrants that it is currently a registered contractor in accordance with RCW 18.27. Continuous registration throughout the performance of the project is a requirement of the contract. The bidder shall promptly furnish proof of registration whenever requested.

6. Performance of Work. (a) The Contractor warrants that all work performed shall be free from defects in material and workmanship, shall conform to the contract documents, and shall be fit for Cowlitz County's intended purposes. If the Engineer determines that the work or any portion thereof fails to conform to the foregoing warranty, the Engineer shall give the Contractor written notice thereof and the Contractor shall then take corrective action as directed by the Engineer. The purpose of the corrective action will be to remedy all nonconforming work and any damage caused by the

nonconforming work. The Contractor shall begin the repair or replacement within 10 days after receiving the notice and shall complete the work within such reasonable time as determined by the Engineer. If the Contractor fails to carry out the corrective action as required by this section, Cowlitz County may perform the corrective action with its own resources or by contract, and the Contractor shall pay all the costs thereof.

(b) If other provisions of the contract documents contain different performance requirements, the more stringent requirements shall apply.

(c) No inspection, acceptance, use, or occupancy of the work, or payment for the work, shall relieve the Contractor from its responsibilities.

(d) The Contractor warrants good title to all materials, supplies, and equipment incorporated into the work.

7. Uniformity of Equipment and Materials. Like items of equipment and materials to be incorporated into the work shall be products of one manufacturer.

8. Substitution of "Equal" Products. Unless otherwise provided, any reference in the contract documents to any product by a brand name, model, or catalog number shall be understood as establishing a standard of quality, and products equal in quality may be substituted if approved in advance by the Engineer. If the Contractor wishes to propose a substitution, it shall submit a written proposal in a form approved by the County, warranting and guarantying the substitute product will be, including but not limited to, at least equal to or better than the specified product in terms of quality, function, performance, compatibility and reliability, to the Engineer, whose decision shall be final. The proposal shall identify the proposed substitute product, and the Contractor shall upon request and at its expense furnish the Engineer with such detailed specifications, test results, and other data as are helpful to the Engineer. The Engineer will not consider any proposed substitution if there is inadequate time available to fully evaluate the proposal. If the Engineer approves a substitution proposed by the Contractor, it is understood that such approval is in reliance upon the Contractor's written warranty and guaranty the substitute product to be, including but not limited to, at least equal to or better than the specified product in terms of quality, function, performance, compatibility and reliability. There will be no additional compensation or extensions to the time for completion. If the installation, application or performance of the substitute product is not equal to the specified product, the Engineer may direct the Contractor to remove the substitute product and replace it with the specified product, and to remedy any damage and delay caused by the use of the substitute product, all at the Contractor's expense. The County has a right to a deductive Change Order if the substituted product proves less costly than the contractually required product.

9. Utilities. The Contractor shall comply with the provisions of RCW 19.122, Standard Specification 1-07.17, and this paragraph. The telephone number of the Cowlitz County Utilities Coordinating Council is (800) 424-5555. The Special Provisions and/or contract plans identify all underground facilities known by Cowlitz County to be located within the area of excavation required as

part of the work. Locations and dimensions shown in the Special Provisions or on the plans are in accordance with available information without uncovering, measuring, or other verification. If a utility is known or suspected of having underground facilities within the area of the excavation, and that utility is not a subscriber to the Cowlitz County Utilities Coordinating Council, the Contractor shall give individual notice to that utility.

10. Prevailing Wages and E-Verify. The Contractor shall pay all fees required by the Department of Labor and Industries in connection with the administration of the prevailing wage requirements. No increase in prevailing wage rates or fringe benefits shall be grounds for any additional compensation to the Contractor.

Cowlitz County requires that all businesses which contract with the County for contracts awarded by formal competitive procedures be enrolled in the Federal E-Verify Program. The requirement extends to every subcontractor meeting the same criteria. The Prime Contractor must provide certification of enrollment with bid submittal. The Prime Contractor is responsible for verification of every applicable subcontractor. Cowlitz County reserves the right to require a copy of a Memorandum of Understanding between the Prime or any Subcontractor and Department of Homeland Security upon request at any time during the project verifying the contractor's enrollment. Failure to provide this document could result in suspension of the project.

A copy of Resolution No. 11-118 is available at the Offices of the Board of County Commissioners. Federal E-Verify Program is a web-based application that can be accessed at www.dhs.gov/everify.

11. Air Pollution Regulations. The Southwest Washington Air Pollution Control Authority has adopted regulations to control the emission of contaminants into the air by sources within the Authority's jurisdiction, which includes Cowlitz County. The Contractor shall comply with all regulations and orders of such Authority.

12. Shoring. If in the performance of this contract, the Contractor or any subcontractor excavates any trench to a depth in excess of four feet, the Contractor shall provide adequate safety systems for the trench excavation that comply with the requirements of the Washington Industrial Safety and Health Act, RCW 39.04.180, and with all regulations thereunder. It is not anticipated that any excavation 4-feet or more in depth will be required for completion of the Work under this contract. Therefore, no bid item for trench safety systems is included in the bidder's proposal. In the event in the performance of the contract the Engineer directs excavation such that shoring or extra excavation is required as determined by the Engineer, payment to the Contractor for such work will be made in accordance with Standard Specifications Section 1-04.4.

13. Worker's Benefits. The following is added at the end of Standard Specification 1-07.10: Notwithstanding the provisions of the preceding paragraphs, Contractor shall remain at all times liable

for payment of any and all premiums due under Title 50 or Title 51 RCW, or any other employee benefit act, with respect to all work performed by Contractor or any subcontractor pursuant to this contract. Contractor shall indemnify, defend and hold Cowlitz County harmless from and against any claim or demand for payment of such premiums. The Contractor's responsibilities under this section shall survive the termination or completion of the contract and/or any release of retainage with respect to the contract. These waivers by the Contractor are a material inducement to County to enter into this contract, are reflected in Contractor's compensation, and have been mutually negotiated by the parties.

**BOARD OF COUNTY COMMISSIONERS
OF COWLITZ COUNTY, WASHINGTON**


Richard R. Dahl, Chairman



Arne Mortensen, Commissioner


Dennis P. Weber, Commissioner

ATTEST:


Kelly Dombrowsky, Clerk of the Board

6/13/23
Date



LAKE SIDE INDUSTRIES INC
Name of Contractor


Signatory Authorized by Firm Bylaws
to Bind Contractor

VICE PRESIDENT
Title

5/31/2023
Date

LAKESI*274JD
Washington Contractor's Registration Number

APPROVED AS TO FORM:

Civil Deputy Prosecuting Attorney

[Executed copies shall be delivered each to County, Contractor, Surety and Insurance Company]

PERFORMANCE BOND

Bond No. 107847236

Travelers Casualty and Surety Company of America

KNOW ALL MEN BY THESE PRESENTS, that the undersigned Contractor and Surety, a corporation, organized and existing under and by virtue of the laws of the State of ^{Connecticut} ~~Washington~~, are jointly and severally obligated to Cowlitz County, State of Washington, in the penal sum of \$ 1,828,892.00, for the payment of which sum we jointly and severally bind ourselves and our heirs, executors, administrators, and assigns, and successors and assigns, firmly in accordance with the following provisions:

The Contractor has entered into or is about to enter into a contract with Cowlitz County for the following project: **2023 JOINT AGENCY PAVEMENT OVERLAY PROJECT.**

Now, if the Contractor fully and timely performs all terms, conditions and requirements of the contract in all respects, including all warranty provisions; and pays all laborers, mechanics, subcontractors, and materialmen, and all persons who supply such person or persons, or subcontractors, with provisions and supplies for the above project; and defends and indemnifies Cowlitz County against any direct or indirect loss, damage, liability, judgments, and costs, to the extent required by the contract; then this obligation shall be void; otherwise it shall remain in full force and effect.

Provided, however, that the conditions of this obligation shall not apply to any money loaned or advanced to the Contractor or to any subcontractor or other person in the performance of any such work.

The Surety, for value received agrees that no change, extension of time, alteration or addition to the terms of the Contract, the specifications accompanying the Contract or to the work to be performed under the Contract shall in any way affect its obligation on this bond, and waives notice of any change, extension of time, alteration or addition to the terms of the Contract or the work performed. The Surety agrees that modifications and changes to the terms and conditions of the Contract that increase the total amount to be paid the Contractor shall automatically increase the obligation of the Surety on this bond and notice to Surety is not required for such increased obligation.

Any judgment against Cowlitz County that relates to or is covered by the contract or this bond shall be conclusive against the Contractor and the Surety, not only as to the amount of damages but also as to their liability if reasonable notice of the pendency of the suit has been given.

Lakeside Industries, Inc.

Name of Contractor



Authorized Signature

VICE PRESIDENT


Title

5/31/2023

Date

Travelers Casualty and Surety Company of America

Name of Surety



Authorized Signature*


Susan B. Larson, Attorney-in-Fact

Title

May 30, 2023

Date

*Attach Power of Attorney





Travelers Casualty and Surety Company of America
Travelers Casualty and Surety Company
St. Paul Fire and Marine Insurance Company

POWER OF ATTORNEY


KNOW ALL MEN BY THESE PRESENTS: That Travelers Casualty and Surety Company of America, Travelers Casualty and Surety Company, and St. Paul Fire and Marine Insurance Company are corporations duly organized under the laws of the State of Connecticut (herein collectively called the "Companies"), and that the Companies do hereby make, constitute and appoint **Susan B. Larson** of **BELLEVUE, Washington**, their true and lawful Attorney(s)-in-Fact to sign, execute, seal and acknowledge any and all bonds, recognizances, conditional undertakings and other writings obligatory in the nature thereof on behalf of the Companies in their business of guaranteeing the fidelity of persons, guaranteeing the performance of contracts and executing or guaranteeing bonds and undertakings required or permitted in any actions or proceedings allowed by law.

IN WITNESS WHEREOF, the Companies have caused this instrument to be signed, and their corporate seals to be hereto affixed, this **21st** day of **April**, 2021.



State of Connecticut


City of Hartford ss.


By: 
 Robert L. Raney, Senior Vice President

On this the **21st** day of **April**, 2021, before me personally appeared **Robert L. Raney**, who acknowledged himself to be the Senior Vice President of each of the Companies, and that he, as such, being authorized so to do, executed the foregoing instrument for the purposes therein contained by signing on behalf of said Companies by himself as a duly authorized officer.

IN WITNESS WHEREOF, I hereunto set my hand and official seal.

My Commission expires the **30th** day of **June**, 2026




 Anna P. Nowik, Notary Public

This Power of Attorney is granted under and by the authority of the following resolutions adopted by the Boards of Directors of each of the Companies, which resolutions are now in full force and effect, reading as follows:

RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President, any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary may appoint Attorneys-in-Fact and Agents to act for and on behalf of the Company and may give such appointee such authority as his or her certificate of authority may prescribe to sign with the Company's name and seal with the Company's seal bonds, recognizances, contracts of indemnity, and other writings obligatory in the nature of a bond, recognizance, or conditional undertaking, and any of said officers or the Board of Directors at any time may remove any such appointee and revoke the power given him or her; and it is

FURTHER RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President may delegate all or any part of the foregoing authority to one or more officers or employees of this Company, provided that each such delegation is in writing and a copy thereof is filed in the office of the Secretary; and it is


FURTHER RESOLVED, that any bond, recognizance, contract of indemnity, or writing obligatory in the nature of a bond, recognizance, or conditional undertaking shall be valid and binding upon the Company when (a) signed by the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary and duly attested and sealed with the Company's seal by a Secretary or Assistant Secretary; or (b) duly executed (under seal, if required) by one or more Attorneys-in-Fact and Agents pursuant to the power prescribed in his or her certificate or their certificates of authority or by one or more Company officers pursuant to a written delegation of authority; and it is

FURTHER RESOLVED, that the signature of each of the following officers: President, any Executive Vice President, any Senior Vice President, any Vice President, any Assistant Vice President, any Secretary, any Assistant Secretary, and the seal of the Company may be affixed by facsimile to any Power of Attorney or to any certificate relating thereto appointing Resident Vice Presidents, Resident Assistant Secretaries or Attorneys-in-Fact for purposes only of executing and attesting bonds and undertakings and other writings obligatory in the nature thereof, and any such Power of Attorney or certificate bearing such facsimile signature or facsimile seal shall be valid and binding upon the Company and any such power so executed and certified by such facsimile signature and facsimile seal shall be valid and binding on the Company in the future with respect to any bond or understanding to which it is attached.

I, **Kevin E. Hughes**, the undersigned, Assistant Secretary of each of the Companies, do hereby certify that the above and foregoing is a true and correct copy of the Power of Attorney executed by said Companies, which remains in full force and effect.

Dated this **30th** day of **May**, 2023




 Kevin E. Hughes, Assistant Secretary

To verify the authenticity of this Power of Attorney, please call us at 1-800-421-3880.
Please refer to the above-named Attorney(s)-in-Fact and the details of the bond to which this Power of Attorney is attached.



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
05/24/2023

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Parker, Smith & Feek Insurance, LLC. 2233 112th Avenue NE Bellevue, WA 98004	CONTACT NAME: PHONE (A/C, No, Ext): 425-709-3600 E-MAIL ADDRESS:	FAX (A/C, No): 425-709-7460
	INSURER(S) AFFORDING COVERAGE INSURER A : American Contractors Insurance Co. RRG INSURER B : INSURER C : INSURER D : INSURER E : INSURER F :	
INSURED Lakeside Industries, Inc. P.O. Box 7016 Issaquah, WA 98027	NAIC #	

COVERAGES

CERTIFICATE NUMBER:

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL SUBR INSR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	GENERAL LIABILITY ☒ COMMERCIAL GENERAL LIABILITY ☐ CLAIMS-MADE ☒ OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: ☐ POLICY ☒ PROJECT ☒ LOC	X	GL23A00092 General Liability	06/01/2023	06/01/2024	EACH OCCURRENCE \$ 10,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 1,000,000 MED EXP (Any one person) \$ 25,000 PERSONAL & ADV INJURY \$ 10,000,000 GENERAL AGGREGATE \$ 10,000,000 PRODUCTS - COMP/OP AGG \$ 10,000,000 \$
	AUTOMOBILE LIABILITY ☐ ANY AUTO ☐ ALL OWNED AUTOS ☐ HIRED AUTOS ☐ SCHEDULED AUTOS ☐ NON-OWNED AUTOS					COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
	UMBRELLA LIAB ☐ EXCESS LIAB DED ☐ RETENTION \$					EACH OCCURRENCE \$ AGGREGATE \$ \$
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	Y/N ☐ N/A	GL23A00092 ** WA Stop Gap	06/01/2023	06/01/2024	WC STATUTORY LIMITS ☒ OTHER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

All Operations, Cowlitz County, Its Elected Officials and Appointed Officials, Officers, Employees and agents are an Additional Insured and coverage is primary and non-contributory on the General Liability policy per the attached endorsements/forms. Waiver of Subrogation applies on the General Liability policy per the attached endorsements/forms.

CERTIFICATE HOLDER

CANCELLATION

Cowlitz County 1600 13th Ave S Kelso, WA 98626	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.
	AUTHORIZED REPRESENTATIVE 

© 1988-2010 ACORD CORPORATION. All rights reserved.

**ADDITIONAL INSURED – AUTOMATIC STATUS
AS REQUIRED BY CONTRACT – BLANKET**

1119

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

SCHEDULE

Any person or organization that you are required by written contract to include as an additional insured on this policy if the contract is executed prior to the loss.

- A. Who Is An Insured (Section II) is amended to include as an insured any person or organization shown in the above SCHEDULE (called additional insured), but only with respect to liability for "bodily injury", "property damage" or "personal and advertising injury" arising out of your premises or your operations for the additional insured, and only to the extent and for the minimum limits required in the written contract.
- B. The insurance provided to the additional insured is subject to the following limitations:
1. Unless a written contract specifically requires additional insured coverage for your completed operations, this insurance does not apply to "bodily injury" or "property damage" occurring after "your work" for the additional insured has been completed or after that portion of "your work" out of which the "bodily injury" or "property damage" arises has been put to its intended use by any person or organization, whichever occurs first.
 2. Unless specifically required by written contract, this insurance provides additional insured coverage only for liability for "bodily injury", "property damage" or "personal and advertising injury" to the extent caused by the named insured's acts or omissions or the acts or omissions of those acting on the named insured's behalf.
 3. This insurance does not apply to "bodily injury", "property damage" or "personal and advertising injury" for which the additional insured is obligated to pay damages by reason of the assumption of liability in a contract or agreement except to the extent that the additional insured would have been obligated to pay such damages in the absence of the contract or agreement.
 4. This insurance does not apply to "bodily injury", "property damage" or "personal and advertising injury" arising out of the rendering or failure to render any professional services by any insured or on any insured's behalf, including:
 - a) The preparing, approving or failing to prepare or approve maps, shop drawings, opinions, reports, surveys, field orders, change orders, drawings or specifications; or
 - b) Supervisory, inspection, architectural, or engineering services.

This exclusion applies even if the claims against any insured allege negligence or other wrongdoing in the supervision, hiring, employment, training or monitoring of others by that insured, if the "occurrence" which caused the "bodily injury" or "property damage", or the offense which caused the "personal and advertising injury", involved the rendering of, or the failure to render, any professional architectural, engineering or surveying services.
 5. This endorsement shall not apply to a person or organization if any other additional insured endorsement attached to this policy specifically applies to that person or organization.
 6. The insurance afforded herein only applies to the extent permitted by applicable state law, including statutes governing additional insured coverage in the construction industry.
 7. The insurance afforded to the additional insured shall not exceed the minimum limits required in the written contract.
- C. In no event shall the insurance provided to the additional insured exceed the minimum coverage required by the written contract, including but not limited to minimum limits, minimum scope of coverage, or minimum duration of coverage. *If a written contract or agreement requires that additional insured status be provided by the use of specified edition dates of the ISO CG2010 and/or CG2037, then the terms of that endorsement are incorporated into this endorsement as respects such additional insured and shall supersede the coverage grant and limitations in Sections A. and B. of this endorsement. In the event that CG2010 and/or CG2037 are required but no edition dates are specified, the 04/13 editions shall apply.*
- D. This insurance is excess to any other insurance, whether primary, excess, contingent or on any other basis, available to the additional insured unless a written contract requires that this insurance be primary or primary and non-contributing. However, this insurance is always excess to other insurance, whether primary, excess, contingent or on any other basis, when the additional insured has been added to the other insurance as an additional insured.

Nothing herein contained shall be held to vary, alter, waive or extend any of the terms, conditions, provisions, agreements or limitations of the mentioned Policy, other than as above stated.

This endorsement changes the policy to which it is attached and is effective on the date issued unless otherwise stated.
(The information below is required only when this endorsement is issued subsequent to preparation of the policy.)

Endorsement Effective: **Same as policy effective date unless otherwise indicated above.**

Policy Effective: 6/1/2023

Policy No.: GL23A00092

Endorsement No.:

Insured: Lakeside Industries, Inc.

Premium \$

Insurance Company: American Contractors Insurance Co. RRG

CITY OF WOODLAND FORMS AND BOND

AGREEMENT
2023 Joint Agency Pavement Overlay Project
Cowlitz County Project No. 2023

THIS AGREEMENT is entered into by and between the **CITY OF WOODLAND** (hereinafter called the Owner) and _____ (hereinafter called the Contractor).

The Owner and the Contractor agree as follows:

ARTICLE 1. WORK.

Project consists of installation of paint lines on existing pavement.

ARTICLE 2. CONTRACT TIME.

Contract time based on the Special Provisions Section 1-08.5.

ARTICLE 3. LIQUIDATED DAMAGES.

Assessed based on the special provisions.

ARTICLE 4. CONTRACT PRICE.

The Owner shall pay the Contractor based on the work performed / bid documents, up to the amount \$ _____. This amount is inclusive of sales tax. Based on Schedule B, bid items 14-22.

ARTICLE 5. CONTRACT

The Contract, which comprises the entire agreement between the Owner and the Contractor concerning the Work, consists of the following:

- This Agreement;
- The Call for Bids;
- The Contractor's Proposal including the bid, bid schedule(s), information required of bidder, Proposal bond, and all required certificates and affidavits;
- The Performance Bond and the Public Works Payment Bond;
- The Contract Provisions, including 2018 WSDOT Standard Specification as referenced;
- Change Orders issued after the effective date of this Agreement.

There are no Contract Documents other than those listed in this Article 5. The Contract may be amended only in writing by Change Order as provided in the Contract.

ARTICLE 6. MISCELLANEOUS.

For purpose of defending any work place injury claims by employees of the Contractor and Subcontractors, the Contractor waives any immunity granted under the State Industrial Insurance Law, RCW Title 51. This waiver has been specifically negotiated between the parties and is hereby acknowledged by the Contractor. _____ (Contractor's initials)

The Contractor shall not assign any rights under or interests in the Contract, including but not limited to rights to payment, without the prior written consent of the Owner. Unless specifically stated in a written consent to an assignment, no assignment will release or discharge the Contractor-assignor from any duty or responsibility under the Contract.
The Contract is binding upon the Owner and the Contractor, and their respective partners, successors, assigns and legal representatives.

IN WITNESS WHEREOF, Owner and Contractor have caused this Agreement to be executed the day and year indicated below.

CITY OF WOODLAND

Contractor Name: _____

CONTRACTOR

License No. _____

+City of Woodland Business License Endorsement

By _____
William A. Finn, Mayor

By _____
Title _____

Date _____

Attest _____

Name and Address for giving notices (print)

PERFORMANCE BOND

We _____ as Principal, and _____
_____ as Surety, jointly and severally bind
ourselves, our heirs, successors and assigns as set forth herein to CITY OF WOODLAND
(hereinafter called the OWNER) for payment of the penal sum of _____
_____, (\$ _____),
lawful money of the United States in connection with the OWNER'S award to the CONTRACTOR
of a contract for construction ("CONTRACT") of the following project:

**CITY OF WOODLAND, WASHINGTON
2023 Joint Agency Pavement Overlay Project**

THE CONDITION OF THIS OBLIGATION IS SUCH that if the CONTRACTOR shall in all respects faithfully perform all obligations and provisions in the said CONTRACT, this obligation shall become null and void; otherwise, it shall remain in full force and effect, and Surety shall defend and indemnify OWNER against any loss or damage due to the failure of the Principal to strictly perform all obligations of the CONTRACT.

This bond shall remain in force for a period of at least two years after the Substantial Completion Date of the project, with respect to defective workmanship and materials, and shall otherwise secure all other obligations of the CONTRACTOR throughout any other periods of limitation or repose.

This bond is provided pursuant to and in compliance with R.C.W. Chapter 39.08, the terms and requirements of which statute are incorporated herein as though fully set forth.

Surety agrees that no change, extension of time, modification, or addition to the terms of the CONTRACT, or the work to be performed thereunder, or to the specifications shall in any way affect its obligation on this bond, and it hereby waives notice thereof.

The CONTRACTOR and Surety agree that if the OWNER is required to engage the services of an attorney in connection with the enforcement of this bond, each shall be jointly and severally liable to pay the OWNER reasonable attorneys' fees, costs and expenses incurred, with or without suit, in addition to the penal sum.

Surety certifies that it is an authorized surety bond issuer, properly authorized to transact surety business in Washington. Surety agrees to be bound by the laws of the State of Washington and subject itself to the jurisdiction of the courts of the State of Washington.

PERFORMANCE BOND – Continued

Executed in four original counterparts on _____, 2023.

Contractor

By _____

Title

(Attach acknowledgement of authorized representative of Contractor).

Any claims under this bond made in accordance with R.C.W. 39.08 may be addressed to:

(Name and address of Surety)

(Name and address of Surety's agent for service of
process in Washington if different from above)

(Telephone No. of Surety's Washington agent)

(Attach Acknowledgement)

Surety

By _____
It's Attorney-in-Fact

NOTE:

1. Date of Bond must not be prior to date of CONTRACT.
2. If CONTRACTOR is a partnership, all partners should execute Bond.
3. Surety companies executing Bond must appear on the Treasury Department's most current list (Circular 570 as amended) and must be authorized to transact business in the State of Washington and have an agent for service of process in Washington.
4. Certified copy of Power of Attorney must be attached.

LABOR AND MATERIAL PAYMENT BOND

We _____ as Principal, and _____
_____ as Surety, jointly and severally bind
ourselves, our heirs, successors and assigns as set forth herein to CITY OF WOODLAND
(hereinafter called the OWNER) for payment of the penal sum of _____
_____ (\$ _____),
lawful money of the United States in connection with the OWNER'S award to the CONTRACTOR
of a contract for construction ("CONTRACT") of the following project:

CITY OF WOODLAND, WASHINGTON 2023 Joint Agency Pavement Overlay Project

THE CONDITION OF THIS OBLIGATION IS SUCH that if the CONTRACTOR shall in all respects faithfully perform all obligations and provisions in the said CONTRACT, and pay all laborers, mechanics, subcontractors, materialmen, taxing authorities and all persons who supply such person or persons or subcontractors with material, equipment, and supplies for the carrying on of such work, this obligation shall become null and void; otherwise, it shall remain in full force and effect, and Surety shall defend and indemnify OWNER against any loss or damage due to the failure of the Principal to strictly perform all obligations of the CONTRACT.

This bond shall be in force until completion of the project and acceptance by the OWNER, and also for such period thereafter during which the law allows claims to be filed and sued upon.

This bond is provided pursuant to and in compliance with R.C.W. Chapter 39.08, the terms and requirements of which statute are incorporated herein as though fully set forth.

Surety agrees that no change, extension of time, modification, or addition to the terms of the CONTRACT, or the work to be performed thereunder, or to the specifications shall in any way affect its obligation on this bond, and it hereby waives notice thereof.

The CONTRACTOR and Surety agree that if the OWNER is required to engage the services of an attorney in connection with the enforcement of this bond, each shall be jointly and severally liable to pay the OWNER reasonable attorneys' fees, costs and expenses incurred, with or without suit, in addition to the penal sum.

Surety certifies that it is an authorized surety bond issuer, properly authorized to transact surety business in Washington. Surety agrees to be bound by the laws of the State of Washington and subject itself to the jurisdiction of the courts of the State of Washington.

LABOR AND MATERIAL PAYMENT BOND – Continued

Executed in four original counterparts on _____, 2023.

Contractor

By _____

Title

(Attach acknowledgement of authorized representative of Contractor).

Any claims under this bond made in accordance with R.C.W. 39.08 may be addressed to:

(Name and address of Surety)

(Name and address of Surety's agent for service of
process in Washington if different from above)

(Telephone No. of Surety's Washington agent)

(Attach Acknowledgement)

Surety

By _____
It's Attorney-in-Fact

NOTE:

1. Date of Bond must not be prior to date of CONTRACT.
2. If CONTRACTOR is a partnership, all partners should execute Bond.
3. Surety companies executing Bond must appear on the Treasury Department's most current list (Circular 570 as amended) and must be authorized to transact business in the State of Washington and have an agent for service of process in Washington.
4. Certified copy of Power of Attorney must be attached.

CITY OF CASTLE ROCK FORMS AND BOND

AGREEMENT

THIS AGREEMENT, made this _____ day of _____, 2023 by and between The City of Castle Rock, hereinafter called CONTRACTING AGENCY and _____, doing business as a corporation, hereinafter called CONTRACTOR.

WITNESSETH: That for and in consideration of the payments and agreements hereinafter mentioned:

The CONTRACTOR will commence and complete the construction of the 2023 Joint Agency Pavement Overlay Project.

The CONTRACTOR will furnish all of the material, supplies, tools, equipment, labor and other services necessary for the construction and completion of the PROJECT described herein.

The CONTRACTOR will commence the work required by the CONTRACT DOCUMENTS within 5 working days after the NOTICE TO PROCEED. If the CONTRACTOR starts work on the project at an earlier date, then contract time shall begin on the first working day when onsite work begins. The project shall be physically completed within **30 working days**, unless the period for completion is extended otherwise by the CONTRACT DOCUMENTS.

The CONTRACTOR agrees to perform all of the WORK described in the CONTRACT DOCUMENTS and comply with the terms therein for the sum of \$ _____ or as shown in the BID schedule.

The term CONTRACT DOCUMENTS means and includes the following:

- A. Documents prepared by Cowlitz County
- B. Agreement
- C. Performance and Payment Bond

The OWNER will pay to the CONTRACTOR in the manner and at such times as set forth in the Standard Specifications such amounts as required by the CONTRACT DOCUMENTS. This Agreement shall be binding upon all parties hereto and their respective heirs, executors, administrators, successors, and assigns.

IN WITNESS WHEREOF, the parties hereto have executed, or caused to be executed by their duly authorized officials, this AGREEMENT in three each of which shall be deemed an original on the date first above written.

OWNER:

By: _____

Name: _____

Title: _____

(Seal)

ATTEST:

Name: _____

Address: _____

CONTRACTOR:

By: _____

Name: _____

Title: _____

(Seal)

ATTEST:

Name: _____

Address: _____

Attest:

City Clerk

Approved as to form:

City Attorney

**PERFORMANCE BOND
To City of Castle Rock, WA**

Bond No. _____

The City of Castle Rock, Washington, (City) has awarded to _____, a contract for the construction of the project designated as 2023 Joint Agency Pavement Overlay Project, in Castle Rock, Washington (Contract), and said Principal is required to furnish a bond for performance of all obligations under the Contract.

The Principal, and _____ (Surety), a corporation, organized under the laws of the State of _____ and licensed to do business in the State of Washington as surety and named in the current list of "Surety Companies Acceptable in Federal Bonds" as published in the Federal Register by the Audit Staff Bureau of Accounts, U.S. Treasury Dept., are jointly and severally held and firmly bound to the City of Castle Rock, in the sum of _____ US Dollars (\$ _____) Total Contract Amount, subject to the provisions herein.

This statutory performance bond shall become null and void, if and when the Principal, its heirs, executors, administrators, successors, or assigns shall well and faithfully perform all of the Principal's obligations under the Contract and fulfill all the items and conditions of all duly authorized modifications, additions, and changes to said Contract that may hereafter be made, at the time and in the manner therein specified; and if such performance obligations have not been fulfilled, this bond shall remain in full force and effect.

The Surety for value received agrees that no change, extension of time, alteration or addition to the terms of the Contract, the specification accompanying the Contract, or to the work to be performed under the Contract shall in any way affect its obligation on this bond, and waives notice of any change, extension of time, alteration or addition of the terms of the Contract or the work performed. The Surety agrees that modifications and changes to the terms and conditions of the Contract that increase the total amount to be paid the Principal shall automatically increase the obligation of the Surety on this bond and notice to Surety is not required for such increased obligation.

This bond may be executed in two (2) original counterparts, and shall be signed by the parties' duly authorized officers. This bond will only be accepted if it is accompanied by a fully executed and original power of attorney for the office executing on behalf of the surety.

PRINCIPAL

SURETY

Principal Signature Date

Surety Signature Date

Printed Name

Printed Name

Title

Title

Name, address, and telephone of local office/agent of Surety Company is:

Approved as to form:

City Attorney, City of Castle Rock

Date

**PUBLIC WORKS PAYMENT BOND
To City of Castle Rock, WA**

Bond No. _____

The City of Castle Rock, Washington, (City) has awarded to _____ (Principal), a contract for the construction of the project designated as 2023 Joint Agency Pavement Overlay Project, in Castle Rock, Washington (Contract), and said Principal is required under the terms of that Contract to furnish a payment bond in accord with Title 39.08 Revised Code of Washington, (RCW) and (where applicable) 60.28 RCW.

The Principal, and _____ (Surety), a corporation organized under the laws of the State of _____ and licensed to do business in the State of Washington as surety and named in the current list of "Surety Companies Acceptable in Federal Bonds" as published in the Federal Register by the Audit Staff Bureau of Accounts, U.S. Treasury Dept., are jointly and severally held and firmly bound to the City of Castle Rock, in the sum of _____ US Dollars (\$_____) Total Contract Amount, subject to provisions herein.

This statutory payment bond shall become null and void, if and when the Principal, its heirs, executors, administrators, successors, or assigns shall pay all persons in accordance with RCW Titles 39.08 and 39.12 including all workers, laborers, mechanics, subcontractors and materialmen, and all persons who shall supply such contractor or subcontractor with provisions and supplies for the carrying on of such work; and if such payment obligations have not been fulfilled, this bond shall remain in full force and effect.

The Surety for value received agrees that no change, extension of time, alteration or addition to the terms of the Contract, the specifications accompanying the Contract, or to the work to be performed under the Contract shall in any way affect its obligation on this bond, except as provided herein, and waives notice of any change, extension of time, alteration or addition to the terms of the Contract or the work performed. The Surety agrees that modifications and changes to the terms and conditions of the Contract that increase the total amount to be paid the Principal shall automatically increase the obligation of the Surety on this bond and notice to Surety is not required for such increased obligation.

This bond may be executed in two (2) original counterparts, and shall be signed by the parties' duly authorized officers. This bond will only be accepted if it is accompanied by a fully executed and original power of attorney for the officer executing on behalf of the surety.

PRINCIPAL

SURETY

Principal Signature Date

Surety Signature Date

Printed Name

Printed Name

Title

Title

Name, address, and telephone of local office/agent of Surety Company is:

Approved as to form:

City Attorney, City of Castle Rock

Date

SPECIAL PROVISIONS

INTRODUCTION TO THE SPECIAL PROVISIONS

(December 10, 2020 APWA GSP)

The work on this project shall be accomplished in accordance with the Standard Specifications for Road, Bridge and Municipal Construction, 2023 edition, as issued by the Washington State Department of Transportation (WSDOT) and the American Public Works Association (APWA), Washington State Chapter (hereafter "Standard Specifications"). The Standard Specifications, as modified or supplemented by these Special Provisions, all of which are made a part of the Contract Documents, shall govern all of the Work.

These Special Provisions are made up of both General Special Provisions (GSPs) from various sources, which may have project-specific fill-ins; and project-specific Special Provisions. Each Provision either supplements, modifies, or replaces the comparable Standard Specification, or is a new Provision. The deletion, amendment, alteration, or addition to any subsection or portion of the Standard Specifications is meant to pertain only to that particular portion of the section, and in no way should it be interpreted that the balance of the section does not apply.

The project-specific Special Provisions are not labeled as such. The GSPs are labeled under the headers of each GSP, with the effective date of the GSP and its source. For example:

(March 8, 2013 APWA GSP)
(April 1, 2013 WSDOT GSP)
(*****, COWLITZ COUNTY GSP)

Also incorporated into the Contract Documents by reference are:

- Manual on Uniform Traffic Control Devices for Streets and Highways, currently adopted edition, with Washington State modifications, if any
- Standard Plans for Road, Bridge and Municipal Construction, WSDOT/APWA, current edition

Contractor shall obtain copies of these publications, at Contractor's own expense.

**- DIVISION 1 -
GENERAL REQUIREMENTS**

DESCRIPTION OF WORK

(March 13, 1995)

This contract provides for the improvement of *** Pavement planing and hot mix asphalt overlay paving of various roads within the participating agencies' jurisdictions, *** and other work, all in accordance with the attached Contract Plans, these Contract Provisions, and the Standard Specifications.

(*****)

Appendices. The following appendices are hereby provided for the Contractor's information:

Appendix A – Pavement Overlay Tonnages / Locations

Appendix B – WSDOT Work Zone Traffic Control Standard Plans

(*****)

Standard Specifications. All sections of the **2023** Standard Specifications not specifically modified below apply. Sections listed below but not modified are referenced for the Contractor's convenience only. Modified sections of the Standard Specifications shall be applicable for the purposes of a single bid item only and shall not represent a modification to all bid items, unless otherwise indicated.

1-01.3 Definitions

(January 19, 2022 APWA GSP)

Delete the heading **Completion Dates** and the three paragraphs that follow it, and replace them with the following:

Dates

Bid Opening Date

The date on which the Contracting Agency publicly opens and reads the Bids.

Award Date

The date of the formal decision of the Contracting Agency to accept the lowest responsible and responsive Bidder for the Work.

Contract Execution Date

The date the Contracting Agency officially binds the Agency to the Contract.

Notice of Award

The written notice from the Contracting Agency to the successful Bidder signifying the Contracting Agency's acceptance of the Bid Proposal.

Notice to Proceed Date

The date stated in the written Notice to Proceed from the Contracting Agency or Engineer to the Contractor and directing the Contractor to proceed with the Work and establishing the date on which the Contract time begins.

Substantial Completion Date

The day the Engineer determines the Contracting Agency has full and unrestricted use and benefit of the facilities, both from the operational and safety standpoint, any remaining traffic disruptions will be rare and brief, and only minor incidental work, replacement of temporary substitute facilities, plant establishment periods, or correction or repair remains for the Physical Completion of the total Contract.

Physical Completion Date

The day all of the Work is physically completed on the project of a Contracting Agency. All documentation required by the Contract and required by law does not necessarily need to be furnished by the Contractor by this date.

Completion Date

The day all the Work specified in the Contract of a Contracting Agency is completed and all the obligations of the Contractor under the contract are fulfilled by the Contractor. All documentation required by the Contract and required by law must be furnished by the Contractor before establishment of this date.

Final Acceptance Date

The date on which the Contracting Agency accepts the Work as complete.

Supplement this Section with the following:

All references in the Standard Specifications or WSDOT General Special Provisions, to the terms "Department of Transportation", "Washington State Transportation Commission", "Commission", "Secretary of Transportation", "Secretary", "Headquarters", and "State Treasurer" shall be revised to read "Contracting Agency".

All references to the terms "State" or "state" shall be revised to read "Contracting Agency" unless the reference is to an administrative agency of the State of Washington, a State statute or regulation, or the context reasonably indicates otherwise.

All references to "State Materials Laboratory" shall be revised to read "Contracting Agency designated location".

All references to "final contract voucher certification" shall be interpreted to mean the Contracting Agency form(s) by which final payment is authorized, and final completion and acceptance granted.

Additive

A supplemental unit of work or group of bid items, identified separately in the Bid Proposal, which may, at the discretion of the Contracting Agency, be awarded in addition to the base bid.

Alternate

One of two or more units of work or groups of bid items, identified separately in the Bid Proposal, from which the Contracting Agency may make a choice between different methods or material of construction for performing the same work.

Business Day

A business day is any day from Monday through Friday except holidays as listed in Section 1-08.5.

Contract Bond

The definition in the Standard Specifications for "Contract Bond" applies to whatever bond form(s) are required by the Contract Documents, which may be a combination of a Payment Bond and a Performance Bond.

Contract Documents

See definition for "Contract".

Contract Time

The period of time established by the terms and conditions of the Contract within which the Work must be physically completed.

Notice of Award

The written notice from the Contracting Agency to the successful Bidder signifying the Contracting Agency's acceptance of the Bid Proposal.

Notice to Proceed

The written notice from the Contracting Agency or Engineer to the Contractor authorizing and directing the Contractor to proceed with the Work and establishing the date on which the Contract time begins.

Traffic

Both vehicular and non-vehicular traffic, such as pedestrians, bicyclists, wheelchairs, and equestrian traffic.

(*****)

"Contracting Agency" means Cowlitz County, City of Castle Rock or City of Woodland dependent of which schedule of work is being completed.

"Engineer" or "Project Engineer" means the Cowlitz County Engineer, City of Castle Rock Director of Public Works or City of Woodland Director of Public Works dependent of which schedule of work is being completed.

"Secretary" or "Secretary of Transportation" means the Board of County Commissioners of Cowlitz County, Castle Rock City Council or Woodland City Council dependent of which schedule of work is being completed.

"State" or "State of Washington" means Cowlitz County, City of Castle Rock or City of Woodland dependent of which schedule of work is being completed, except when referring to state departments other than the department of transportation, and except when referring to state publications, laws, etc.

1-02 BID PROCEDURES AND CONDITIONS

1-02.1 Prequalification of Bidders

Delete this Section and replace it with the following:

1-02.1 Qualifications of Bidder

(January 24, 2011 APWA GSP)

Before award of a public works contract, a bidder must meet at least the minimum qualifications of RCW 39.04.350(1) to be considered a responsible bidder and qualified to be awarded a public works project.

1-02.2 Plans and Specifications

(June 27, 2011 APWA GSP)

Delete this section and replace it with the following:

Information as to where Bid Documents can be obtained or reviewed can be found in the Call for Bids (Advertisement for Bids) for the work.

After award of the contract, plans and specifications will be issued to the Contractor at no cost as detailed below:

To Prime Contractor	No. of Sets	Basis of Distribution
Reduced plans (11" x 17")	0	Furnished automatically upon award.
Contract Provisions	2	Furnished automatically upon award.
Large plans (e.g., 22" x 34")	0	Furnished only upon request.

Additional plans and Contract Provisions may be obtained by the Contractor from the source stated in the Call for Bids, at the Contractor's own expense.

1-02.5 Proposal Forms

(July 31, 2017 APWA GSP)

Delete this section and replace it with the following:

The Proposal Form will identify the project and its location and describe the work. It will also list estimated quantities, units of measurement, the items of work, and the materials to be furnished at the unit bid prices. The bidder shall complete spaces on the proposal form that call for, but are not limited to, unit prices; extensions; summations; the total bid amount; signatures; date; and, where applicable, retail sales taxes and acknowledgment of addenda; the bidder's name, address, telephone number, and signature; the bidder's UDBE/DBE/M/WBE commitment, if applicable; a State of Washington Contractor's Registration Number; and a Business License Number, if applicable. Bids shall be completed by typing or shall be printed in ink by hand, preferably in black ink. The required certifications are included as part of the Proposal Form.

The Contracting Agency reserves the right to arrange the proposal forms with alternates and additives if such be to the advantage of the Contracting Agency. The bidder shall bid on all alternates and additives set forth in the Proposal Form unless otherwise specified.

1-02.6 Preparation of Proposal

(December 10, 2020 APWA GSP, Option B)

Supplement the second paragraph with the following:

4. If a minimum bid amount has been established for any item, the unit or lump sum price must equal or exceed the minimum amount stated.
5. Any correction to a bid made by interlineation, alteration, or erasure, shall be initialed by the signer of the bid.

Delete the last two paragraphs, and replace them with the following:

The Bidder shall submit with their Bid a completed Contractor Certification Wage Law Compliance form, provided by the Contracting Agency. Failure to return this certification as part of the Bid Proposal package will make this Bid Nonresponsive and ineligible for Award. A Contractor Certification of Wage Law Compliance form is included in the Proposal Forms.

The Bidder shall make no stipulation on the Bid Form, nor qualify the bid in any manner.

A bid by a corporation shall be executed in the corporate name, by the president or a vice president (or other corporate officer accompanied by evidence of authority to sign).

A bid by a partnership shall be executed in the partnership name, and signed by a partner. A copy of the partnership agreement shall be submitted with the Bid Form if any UDBE requirements are to be satisfied through such an agreement.

A bid by a joint venture shall be executed in the joint venture name and signed by a member of the joint venture. A copy of the joint venture agreement shall be submitted with the Bid Form if any UDBE requirements are to be satisfied through such an agreement.

Add the following new section:

1-02.6(1) Recycled Materials Proposal

(January 4, 2016 APWA GSP)

The Bidder shall submit with the Bid, its proposal for incorporating recycled materials into the project, using the form provided in the Contract Provisions.

1-02.9 Delivery of Proposal

(January 19, 2022 APWA GSP, Option A)

Delete this section and replace it with the following:

Each Proposal shall be submitted in a sealed envelope, with the Project Name and Project Number as stated in the Call for Bids clearly marked on the outside of the envelope, or as otherwise required in the Bid Documents, to ensure proper handling and delivery.

To be considered responsive on a FHWA-funded project, the Bidder may be required to submit the following items, as required by Section 1-02.6:

- DBE Utilization Certification (WSDOT 272-056)
- DBE Written Confirmation Document (WSDOT 422-031) from each DBE firm listed on the Bidder's completed DBE Utilization Certification
- Good Faith Effort (GFE) Documentation
- DBE Bid Item Breakdown (WSDOT 272-054)
- DBE Trucking Credit Form (WSDOT 272-058)

DBE Utilization Certification

The DBE Utilization Certification shall be received at the same location and no later than the time required for delivery of the Proposal. The Contracting Agency will not open or consider any Proposal when the DBE Utilization Certification is received after the time specified for receipt of Proposals or received in a location other than that specified for receipt of Proposals. The DBE Utilization Certification may be submitted in the same envelope as the Bid deposit.

DBE Written Confirmation and/or GFE Documentation

The DBE Written Confirmation Documents and/or GFE Documents are not required to be submitted with the Proposal. The DBE Written Confirmation Document(s) and/or GFE (if any) shall be received either with the Bid Proposal or as a Supplement to the Bid. The documents shall be received no later than 48 hours (not including Saturdays, Sundays and Holidays) after the time for delivery of the Proposal. To be considered responsive, Bidders shall submit Written Confirmation Documentation from each DBE firm listed on the Bidder's completed DBE Utilization Certification and/or the GFE as required by Section 1-02.6.

DBE Bid Item Breakdown and DBE Trucking Credit Form

The DBE Bid Item Breakdown and the DBE Trucking Credit Forms (if applicable) shall be received either with the Bid Proposal or as a Supplement to the Bid. The documents shall be received no later than 48 hours (not including Saturdays, Sundays and Holidays) after the time for delivery of the Proposal. To be considered responsive, Bidders shall submit a completed DBE Bid Item Breakdown and a DBE Trucking Credit Form for each DBE Trucking firm listed on the DBE Utilization Certification, however, minor errors and corrections to DBE Bid Item Breakdown or DBE Trucking Credit Forms will be returned for correction for a period up to five calendar days (not including Saturdays, Sundays and Holidays) after the time for delivery of the Proposal. A DBE Bid Item Breakdown or DBE Trucking Credit Forms that are still incorrect after the correction period will be determined to be non-responsive.

Proposals that are received as required will be publicly opened and read as specified in Section 1-02.12. The Contracting Agency will not open or consider any Bid Proposal that is received after the time specified in the Call for Bids for receipt of Bid Proposals or received in a location other than that specified

in the Call for Bids. The Contracting Agency will not open or consider any “Supplemental Information” (DBE confirmations, or GFE documentation) that is received after the time specified above or received in a location other than that specified in the Call for Bids.

If an emergency or unanticipated event interrupts normal work processes of the Contracting Agency so that Proposals cannot be received at the office designated for receipt of bids as specified in Section 1-02.12 the time specified for receipt of the Proposal will be deemed to be extended to the same time of day specified in the solicitation on the first workday on which the normal work processes of the Contracting Agency resume.

1-02.10 Withdrawing, Revising, or Supplementing Proposal

(July 23, 2015 APWA GSP)

Delete this section, and replace it with the following:

After submitting a physical Bid Proposal to the Contracting Agency, the Bidder may withdraw, revise, or supplement it if:

1. The Bidder submits a written request signed by an authorized person and physically delivers it to the place designated for receipt of Bid Proposals, and
2. The Contracting Agency receives the request before the time set for receipt of Bid Proposals, and
3. The revised or supplemented Bid Proposal (if any) is received by the Contracting Agency before the time set for receipt of Bid Proposals.

If the Bidder’s request to withdraw, revise, or supplement its Bid Proposal is received before the time set for receipt of Bid Proposals, the Contracting Agency will return the unopened Proposal package to the Bidder. The Bidder must then submit the revised or supplemented package in its entirety. If the Bidder does not submit a revised or supplemented package, then its bid shall be considered withdrawn.

Late revised or supplemented Bid Proposals or late withdrawal requests will be date recorded by the Contracting Agency and returned unopened. Mailed, emailed, or faxed requests to withdraw, revise, or supplement a Bid Proposal are not acceptable.

(*****)

1-02.12 Public Opening of Proposal

Section 1-02.12 is supplemented with the following:

Date Of Opening Bids

Sealed bids are to be received at the following location prior to the time specified in the CALL FOR BIDS:

Board of County Commissioners
Attn: Clerk of the Board
County Administration Building
207 Fourth Avenue North, 3rd Floor
Kelso WA 98626

1-02.13 Irregular Proposals
(December 30, 2022 APWA GSP)

Delete this section and replace it with the following:

1. A Proposal will be considered irregular and will be rejected if:
 - a. The Bidder is not prequalified when so required;
 - b. The authorized Proposal form furnished by the Contracting Agency is not used or is altered;
 - c. The completed Proposal form contains any unauthorized additions, deletions, alternate Bids, or conditions;
 - d. The Bidder adds provisions reserving the right to reject or accept the award, or enter into the Contract;
 - e. A price per unit cannot be determined from the Bid Proposal;
 - f. The Proposal form is not properly executed;
 - g. The Bidder fails to submit or properly complete a subcontractor list (WSDOT Form 271-015), if applicable, as required in Section 1-02.6;
 - h. The Bidder fails to submit or properly complete a Disadvantaged Business Enterprise Certification (WSDOT Form 272-056), if applicable, as required in Section 1-02.6;
 - i. The Bidder fails to submit Written Confirmations (WSDOT Form 422-031) from each DBE firm listed on the Bidder's completed DBE Utilization Certification that they are in agreement with the bidder's DBE participation commitment, if applicable, as required in Section 1-02.6, or if the written confirmation that is submitted fails to meet the requirements of the Special Provisions;
 - j. The Bidder fails to submit DBE Good Faith Effort documentation, if applicable, as required in Section 1-02.6, or if the documentation that is submitted fails to demonstrate that a Good Faith Effort to meet the Condition of Award was made;
 - k. The Bidder fails to submit a DBE Bid Item Breakdown (WSDOT Form 272-054), if applicable, as required in Section 1-02.6, or if the documentation that is submitted fails to meet the requirements of the Special Provisions;
 - l. The Bidder fails to submit DBE Trucking Credit Forms (WSDOT Form 272-058), if applicable, as required in Section 1-02.6, or if the documentation that is submitted fails to meet the requirements of the Special Provisions;
 - m. The Bid Proposal does not constitute a definite and unqualified offer to meet the material terms of the Bid invitation; or
 - n. More than one Proposal is submitted for the same project from a Bidder under the same or different names.
2. A Proposal may be considered irregular and may be rejected if:
 - a. The Proposal does not include a unit price for every Bid item;
 - b. Any of the unit prices are excessively unbalanced (either above or below the amount of a reasonable Bid) to the potential detriment of the Contracting Agency;
 - c. Receipt of Addenda is not acknowledged;
 - d. A member of a joint venture or partnership and the joint venture or partnership submit Proposals for the same project (in such an instance, both Bids may be rejected); or
 - e. If Proposal form entries are not made in ink.

1-02.14 Disqualification of Bidders
(May 17, 2018 APWA GSP, Option A)

Delete this section and replace it with the following:

A Bidder will be deemed not responsible if the Bidder does not meet the mandatory bidder responsibility criteria in RCW 39.04.350(1), as amended.

The Contracting Agency will verify that the Bidder meets the mandatory bidder responsibility criteria in RCW 39.04.350(1). To assess bidder responsibility, the Contracting Agency reserves the right to request documentation as needed from the Bidder and third parties concerning the Bidder's compliance with the mandatory bidder responsibility criteria.

If the Contracting Agency determines the Bidder does not meet the mandatory bidder responsibility criteria in RCW 39.04.350(1) and is therefore not a responsible Bidder, the Contracting Agency shall notify the Bidder in writing, with the reasons for its determination. If the Bidder disagrees with this determination, it may appeal the determination within two (2) business days of the Contracting Agency's determination by presenting its appeal and any additional information to the Contracting Agency. The Contracting Agency will consider the appeal and any additional information before issuing its final determination. If the final determination affirms that the Bidder is not responsible, the Contracting Agency will not execute a contract with any other Bidder until at least two business days after the Bidder determined to be not responsible has received the Contracting Agency's final determination.

1-02.15 Pre Award Information
(December 30, 2022 APWA GSP)

Revise this section to read:

Before awarding any contract, the Contracting Agency may require one or more of these items or actions of the apparent lowest responsible bidder:

1. A complete statement of the origin, composition, and manufacture of any or all materials to be used,
2. Samples of these materials for quality and fitness tests,
3. A progress schedule (in a form the Contracting Agency requires) showing the order of and time required for the various phases of the work,
4. A breakdown of costs assigned to any bid item,
5. Attendance at a conference with the Engineer or representatives of the Engineer,
6. Obtain, and furnish a copy of, a business license to do business in the city or county where the work is located.
7. Any other information or action taken that is deemed necessary to ensure that the bidder is the lowest responsible bidder.

1-03 AWARD AND EXECUTION OF CONTRACT

1-03.1 Consideration of Bids

(December 30, 2022 APWA GSP)

Revise the first paragraph to read:

After opening and reading proposals, the Contracting Agency will check them for correctness of extensions of the prices per unit and the total price. If a discrepancy exists between the price per unit and the extended amount of any bid item, the price per unit will control. If a minimum bid amount has been established for any item and the bidder's unit or lump sum price is less than the minimum specified amount, the Contracting Agency will unilaterally revise the unit or lump sum price, to the minimum specified amount and recalculate the extension. The total of extensions, corrected where necessary, including sales taxes where applicable and such additives and/or alternates as selected by the Contracting Agency, will be used by the Contracting Agency for award purposes and to fix the Awarded Contract Price amount and the amount of the contract bond.

1-03.1(1) Identical Bid Totals

(December 30, 2022 APWA GSP)

Revise this section to read:

After opening Bids, if two or more lowest responsive Bid totals are exactly equal, then the tie-breaker will be the Bidder with an equal lowest bid, that proposed to use the highest percentage of recycled materials in the Project, per the form submitted with the Bid Proposal. If those percentages are also exactly equal, then the tie-breaker will be determined by drawing as follows: Two or more slips of paper will be marked as follows: one marked "Winner" and the other(s) marked "unsuccessful". The slips will be folded to make the marking unseen. The slips will be placed inside a box. One authorized representative of each Bidder shall draw a slip from the box. Bidders shall draw in alphabetic order by the name of the firm as registered with the Washington State Department of Licensing. The slips shall be unfolded and the firm with the slip marked "Winner" will be determined to be the successful Bidder and eligible for Award of the Contract. Only those Bidders who submitted a Bid total that is exactly equal to the lowest responsive Bid, and with a proposed recycled materials percentage that is exactly equal to the highest proposed recycled materials amount, are eligible to draw.

1-03.3 Execution of Contract

(January 19, 2022 APWA GSP)

Revise this section to read:

Within 3 calendar days of Award date (not including Saturdays, Sundays and Holidays), the successful Bidder shall provide the information necessary to execute the Contract to the Contracting Agency. The Bidder shall send the contact information, including the full name, email address, and phone number, for the authorized signer and bonding agent to the Contracting Agency.

Copies of the Contract Provisions, including the unsigned Form of Contract, will be available for signature by the successful bidder on the first business day following award. The number of copies to be executed by the Contractor will be determined by the Contracting Agency.

Within ****10**** calendar days after the award date, the successful bidder shall return the signed Contracting Agency-prepared contract, an insurance certification as required by Section 1-07.18, a satisfactory bond as required by law and Section 1-03.4, the Transfer of Coverage form for the Construction Stormwater General Permit with sections I, III, and VIII completed when provided. Before execution of the contract by the Contracting Agency, the successful bidder shall provide any pre-award information the Contracting Agency may require under Section 1-02.15.

Until the Contracting Agency executes a contract, no proposal shall bind the Contracting Agency nor shall any work begin within the project limits or within Contracting Agency-furnished sites. The Contractor shall bear all risks for any work begun outside such areas and for any materials ordered before the contract is executed by the Contracting Agency.

If the bidder experiences circumstances beyond their control that prevents return of the contract documents within the calendar days after the award date stated above, the Contracting Agency may grant up to a maximum of ****10**** additional calendar days for return of the documents, provided the Contracting Agency deems the circumstances warrant it.

(*****)

A separate contract shall be executed for each schedule in the Proposal, between the Contractor and the Contracting Agency associated with that schedule.

1-03.4 Contract Bond

(July 23, 2015 APWA GSP)

Delete the first paragraph and replace it with the following:

The successful bidder shall provide executed payment and performance bond(s) for the full contract amount. The bond may be a combined payment and performance bond; or be separate payment and performance bonds. In the case of separate payment and performance bonds, each shall be for the full contract amount. The bond(s) shall:

1. Be on Contracting Agency-furnished form(s);
2. Be signed by an approved surety (or sureties) that:
 - a. Is registered with the Washington State Insurance Commissioner, and
 - b. Appears on the current Authorized Insurance List in the State of Washington published by the Office of the Insurance Commissioner,
3. Guarantee that the Contractor will perform and comply with all obligations, duties, and conditions under the Contract, including but not limited to the duty and obligation to indemnify, defend, and protect the Contracting Agency against all losses and claims related directly or indirectly from any failure:

- a. Of the Contractor (or any of the employees, subcontractors, or lower tier subcontractors of the Contractor) to faithfully perform and comply with all contract obligations, conditions, and duties, or
 - b. Of the Contractor (or the subcontractors or lower tier subcontractors of the Contractor) to pay all laborers, mechanics, subcontractors, lower tier subcontractors, material person, or any other person who provides supplies or provisions for carrying out the work;
4. Be conditioned upon the payment of taxes, increases, and penalties incurred on the project under titles 50, 51, and 82 RCW; and
 5. Be accompanied by a power of attorney for the Surety's officer empowered to sign the bond; and
 6. Be signed by an officer of the Contractor empowered to sign official statements (sole proprietor or partner). If the Contractor is a corporation, the bond(s) must be signed by the president or vice president, unless accompanied by written proof of the authority of the individual signing the bond(s) to bind the corporation (i.e., corporate resolution, power of attorney, or a letter to such effect signed by the president or vice president).

Add the following new section:

1-03.4(1) Retainage in Lieu of Contract Bond
(May 17, 2018 APWA GSP)

For contracts of \$150,000 or less, the Contractor may, at the Contractor's option, authorize the Contracting Agency to retain 10% of the contract amount in lieu of furnishing a performance and/or payment bond. If the Contractor elects this option, the retainage shall be held for a period of thirty (30) days after the date of final acceptance, or until receipt of all necessary releases from the Departments of Revenue and of Labor and Industries and settlement of any liens filed under RCW 60.28, whichever is later. The Contractor must advise the Contracting Agency in writing of the Contractor's election to authorize retainage in lieu of a bond, at the time of execution of the Contract.

In choosing this option, the Contractor agrees that if the Contractor, its heirs, executors, administrators, successors, or assigns, shall in all things stand to and abide by, and well and truly keep and perform the covenants, conditions and agreements in the Contract, and shall faithfully perform all the provisions of such contract and shall also well and truly perform and fulfill all the undertakings, covenants, terms, conditions and agreements of any and all duly authorized modifications of the Contract that may hereafter be made, at the time and in the manner therein specified, and shall pay all laborers, mechanics, subcontractors, and material suppliers, and all persons who shall supply such person or persons, or subcontractors, with provisions and supplies for the carrying on of such work, on his or her part, and shall indemnify and save harmless the Contracting Agency, its officers and agents from any claim for such payment, then the funds retained in lieu of a performance bond shall be released at the time provided above; otherwise, the funds shall be retained until the Contractor fulfills the said obligations.

1-03.7 Judicial Review

(December 30, 2022 APWA GSP)

Revise this section to read:

All decisions made by the Contracting Agency regarding the Award and execution of the Contract or Bid rejection shall be conclusive subject to the scope of judicial review permitted under Washington Law. Such review, if any, shall be timely filed in the Superior Court of the county where the Contracting Agency headquarters is located, provided that where an action is asserted against a county, RCW 36.01.050 shall control venue and jurisdiction.

1-04 SCOPE OF THE WORK

1-04.2 Coordination of Contract Documents, Plans, Special Provisions, Specifications, and Addenda

(December 30, 2022 APWA GSP)

Revise the second paragraph to read:

Any inconsistency in the parts of the contract shall be resolved by following this order of precedence (e.g., 1 presiding over 2, 2 over 3, 3 over 4, and so forth):

1. Addenda,
2. Proposal Form,
3. Special Provisions,
4. Contract Plans,
5. Standard Specifications,
6. Contracting Agency's Standard Plans or Details (if any), and
7. WSDOT Standard Plans for Road, Bridge, and Municipal Construction.

(*****)

Interpretation of Contract Documents. The Contractor shall provide any work or materials clearly implied in the contract even if the contract documents do not mention it specifically. If the contract documents use words that are not defined therein but have a commonly accepted technical or trade meaning, the words shall be understood in accordance with that meaning.

1-04.4 Changes

(January 19, 2022 APWA GSP)

The first two sentences of the last paragraph of Section 1-04.4 are deleted.

1-05 CONTROL OF WORK

1-05.1 Authority of The Engineer

Section 1-05.1 is supplemented with the following:

(*****)

Additional Directions from Engineer. If the Engineer determines that the provisions in the contract documents are not sufficiently clear to permit the Contractor to proceed with the work, the Engineer shall, either on his own or upon written request from the Contractor, furnish such additional written directions as he deems appropriate. When the Contractor makes such a request, it must do so in writing and must allow ample time to permit the Engineer to review the request and prepare any additional directions before the Contractor begins any work affected by the request. Any additional directions issued by the Engineer shall not be inconsistent with the contract documents and shall have the same force and effect as if contained in the contract documents.

1-05.3 Plans and Working Drawings

Section 1-05.3 is supplemented with the following:

Shop Drawings. The Contractor shall submit five copies of all shop drawings and samples to the Engineer for review and approval in accordance with the schedule of shop drawing submissions approved at the Pre-Construction Conference. Contractor shall check and verify all field measurements prior to submitting shop drawings to Engineer for review and approval, shop drawings shall have been checked by and stamped with the approval of the Contractor and identified as the Engineer may require. The data shown on the Shop Drawings will be complete with respect to dimensions, design criteria, material or construction and like information to enable the Engineer to review the information as required.

At the time of each submission, the Contractor shall, in writing, call the Engineer's attention to any deviations that the Shop Drawings or Samples may have from the requirements of the Contract Documents.

The Engineer will review and approve with reasonable promptness shop drawings and samples, but the Engineer's review and approval shall be only for conformance with the design concept of the Project and for compliance with the information given in the Contract Documents and shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions. The Contractor shall make any corrections required by the Engineer and shall return the required number of corrected copies of shop drawing and resubmit new samples for review and approval. The Contractor shall direct specific attention, in writing, to revisions other than the corrections called for by the Engineer on previous submittals. The Contractor's stamp of approval on any shop drawings or samples shall constitute a representation to Owner and Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that the Contractor has reviewed or coordinated each shop drawing or sample with the requirements of the work and the Contract Documents.

Where a shop drawing or sample is required by the Specifications, no related work shall be commenced until the submittal has been reviewed and approved by the Engineer.

The Engineer's review and approval of shop drawings or samples shall not relieve the Contractor from responsibility for any deviations from the Contract Documents unless the Contractor has, in writing, called the Engineer's attention to such deviation at the time of submission and the Engineer has given written concurrence and approval to the specific deviation, nor shall any concurrence or approval by the Engineer relieve the Contractor from responsibility for errors or omissions in the shop drawings.

The following is a list of products and materials for which the Contractor shall submit shop drawings or samples. The list may not be inclusive and is subject to revision by the Engineer and Owner.

- 1.) Hot Mix Asphalt

1-05.7 Removal of Defective and Unauthorized Work

(October 1, 2005 APWA GSP)

Supplement this section with the following:

If the Contractor fails to remedy defective or unauthorized work within the time specified in a written notice from the Engineer or fails to perform any part of the work required by the Contract Documents, the Engineer may correct and remedy such work as may be identified in the written notice, with Contracting Agency forces or by such other means as the Contracting Agency may deem necessary.

If the Contractor fails to comply with a written order to remedy what the Engineer determines to be an emergency situation, the Engineer may have the defective and unauthorized work corrected immediately, have the rejected work removed and replaced, or have work the Contractor refuses to perform completed by using Contracting Agency or other forces. An emergency situation is any situation when, in the opinion of the Engineer, a delay in its remedy could be potentially unsafe, or might cause serious risk of loss or damage to the public.

Direct or indirect costs incurred by the Contracting Agency attributable to correcting and remedying defective or unauthorized work, or work the Contractor failed or refused to perform, shall be paid by the Contractor. Payment will be deducted by the Engineer from monies due, or to become due, the Contractor. Such direct and indirect costs shall include in particular, but without limitation, compensation for additional professional services required, and costs for repair and replacement of work of others destroyed or damaged by correction, removal, or replacement of the Contractor's unauthorized work.

No adjustment in contract time or compensation will be allowed because of the delay in the performance of the work attributable to the exercise of the Contracting Agency's rights provided by this Section.

The rights exercised under the provisions of this section shall not diminish the Contracting Agency's right to pursue any other avenue for additional remedy or damages with respect to the Contractor's failure

to perform the work as required.

1-05.11 Final Inspection

Delete this section and replace it with the following:

1-05.11 Final Inspections and Operational Testing

(October 1, 2005 APWA GSP)

1-05.11(1) Substantial Completion Date

When the Contractor considers the work to be substantially complete, the Contractor shall so notify the Engineer and request the Engineer establish the Substantial Completion Date. The Contractor's request shall list the specific items of work that remain to be completed in order to reach physical completion. The Engineer will schedule an inspection of the work with the Contractor to determine the status of completion. The Engineer may also establish the Substantial Completion Date unilaterally.

If, after this inspection, the Engineer concurs with the Contractor that the work is substantially complete and ready for its intended use, the Engineer, by written notice to the Contractor, will set the Substantial Completion Date. If, after this inspection the Engineer does not consider the work substantially complete and ready for its intended use, the Engineer will, by written notice, so notify the Contractor giving the reasons therefore.

Upon receipt of written notice concurring in or denying substantial completion, whichever is applicable, the Contractor shall pursue vigorously, diligently and without unauthorized interruption, the work necessary to reach Substantial and Physical Completion. The Contractor shall provide the Engineer with a revised schedule indicating when the Contractor expects to reach substantial and physical completion of the work.

The above process shall be repeated until the Engineer establishes the Substantial Completion Date and the Contractor considers the work physically complete and ready for final inspection.

1-05.11(2) Final Inspection and Physical Completion Date

When the Contractor considers the work physically complete and ready for final inspection, the Contractor by written notice, shall request the Engineer to schedule a final inspection. The Engineer will set a date for final inspection. The Engineer and the Contractor will then make a final inspection and the Engineer will notify the Contractor in writing of all particulars in which the final inspection reveals the work incomplete or unacceptable. The Contractor shall immediately take such corrective measures as are necessary to remedy the listed deficiencies. Corrective work shall be pursued vigorously, diligently, and without interruption until physical completion of the listed deficiencies. This process will continue until the Engineer is satisfied the listed deficiencies have been corrected.

If action to correct the listed deficiencies is not initiated within 7 days after receipt of the written notice listing the deficiencies, the Engineer may, upon written notice to the Contractor, take whatever steps are necessary to correct those deficiencies pursuant to Section 1-05.7.

The Contractor will not be allowed an extension of contract time because of a delay in the performance of the work attributable to the exercise of the Engineer's right hereunder.

Upon correction of all deficiencies, the Engineer will notify the Contractor and the Contracting Agency, in writing, of the date upon which the work was considered physically complete. That date shall constitute the Physical Completion Date of the contract but shall not imply acceptance of the work or that all the obligations of the Contractor under the contract have been fulfilled.

1-05.11(3) Operational Testing

It is the intent of the Contracting Agency to have at the Physical Completion Date a complete and operable system. Therefore, when the work involves the installation of machinery or other mechanical equipment; street lighting, electrical distribution or signal systems; irrigation systems; buildings; or other similar work it may be desirable for the Engineer to have the Contractor operate and test the work for a period of time after final inspection but prior to the physical completion date. Whenever items of work are listed in the Contract Provisions for operational testing, they shall be fully tested under operating conditions for the time period specified to ensure their acceptability prior to the Physical Completion Date. During and following the test period, the Contractor shall correct any items of workmanship, materials, or equipment which prove faulty, or that are not in first class operating condition. Equipment, electrical controls, meters, or other devices and equipment to be tested during this period shall be tested under the observation of the Engineer, so that the Engineer may determine their suitability for the purpose for which they were installed. The Physical Completion Date cannot be established until testing and corrections have been completed to the satisfaction of the Engineer.

The costs for power, gas, labor, material, supplies, and everything else needed to successfully complete operational testing, shall be included in the unit contract prices related to the system being tested, unless specifically set forth otherwise in the proposal.

Operational and test periods, when required by the Engineer, shall not affect a manufacturer's guaranties or warranties furnished under the terms of the contract.

1-05.13 Superintendents, Labor and Equipment of Contractor

(August 14, 2013 APWA GSP)

Delete the sixth and seventh paragraphs of this section.

1-05.14 Cooperation with Other Contractors

Section 1-05.14 is supplemented with the following:

(March 13, 1995)

Other Contracts Or Other Work

It is anticipated the following work adjacent to or within the limits of this project will be performed by others during the course of this project and will require coordination of the work:

Cowlitz County Public Works
1600 13th Avenue South
Kelso, WA 98626

City of Castle Rock Public Works
360 "A" Street
Castle Rock, WA 98611

City of Woodland Public Works
230 Davidson Ave
P.O. Box 9
Woodland, WA 98674

1-05.15 Method of Serving Notices

The second paragraph in Section 1-05.15 is revised to read:

All correspondence from the Contractor constituting any notification, notice of protest, notice of dispute, or other correspondence constituting notification required to be furnished under the Contract, must be in paper format, hand delivered or sent via mail delivery service to the respective Project Engineer's office. Electronic copies such as e-mails or electronically delivered copies will not constitute such notice and will not comply with the requirements of the Contract.

Add the following new section:

1-05.16 Water and Power *(October 1, 2005 APWA GSP)*

The Contractor shall make necessary arrangements and shall bear the costs for power and water necessary for the performance of the work, unless the contract includes power and water as a pay item.

1-06 CONTROL OF MATERIAL

1-06.6 Recycled Materials *(January 4, 2016 APWA GSP)*

Delete this section, including its subsections, and replace it with the following:

The Contractor shall make their best effort to utilize recycled materials in the construction of the project. Approval of such material use shall be as detailed elsewhere in the Standard Specifications.

Prior to Physical Completion the Contractor shall report the quantity of recycled materials that were utilized in the construction of the project for each of the items listed in Section 9-03.21. The report shall include hot mix asphalt, recycled concrete aggregate, recycled glass, steel furnace slag and other recycled materials (e.g. utilization of on-site material and aggregates from concrete returned to the supplier). The Contractor's report shall be provided on DOT form 350-075 Recycled Materials Reporting.

1-07 LEGAL RELATIONS AND RESPONSIBILITIES TO THE PUBLIC

1-07.1 Laws To Be Observed

Section 1-07.1 is supplemented with the following:

(October 1, 2005 APWA GSP)

Supplement this section with the following:

In cases of conflict between different safety regulations, the more stringent regulation shall apply.

The Washington State Department of Labor and Industries shall be the sole and paramount administrative agency responsible for the administration of the provisions of the Washington Industrial Safety and Health Act of 1973 (WISHA).

The Contractor shall maintain at the project site office, or other well-known place at the project site, all articles necessary for providing first aid to the injured. The Contractor shall establish, publish, and make known to all employees, procedures for ensuring immediate removal to a hospital, or doctor's care, persons, including employees, who may have been injured on the project site. Employees should not be permitted to work on the project site before the Contractor has established and made known procedures for removal of injured persons to a hospital or a doctor's care.

The Contractor shall have sole responsibility for the safety, efficiency, and adequacy of the Contractor's plant, appliances, and methods, and for any damage or injury resulting from their failure, or improper maintenance, use, or operation. The Contractor shall be solely and completely responsible for the conditions of the project site, including safety for all persons and property in the performance of the work. This requirement shall apply continuously, and not be limited to normal working hours. The required or implied duty of the Engineer to conduct construction review of the Contractor's performance does not, and shall not, be intended to include review and adequacy of the Contractor's safety measures in, on, or near the project site.

1-07.2 State Sales Tax

Delete this section, including its sub-sections, in its entirety and replace it with the following:

1-07.2 State Sales Tax

(June 27, 2011 APWA GSP)

The Washington State Department of Revenue has issued special rules on the State sales tax. Sections 1-07.2(1) through 1-07.2(3) are meant to clarify those rules. The Contractor should contact the Washington State Department of Revenue for answers to questions in this area. The Contracting Agency will not adjust its payment if the Contractor bases a bid on a misunderstood tax liability.

The Contractor shall include all Contractor-paid taxes in the unit bid prices or other contract amounts. In some cases, however, state retail sales tax will not be included. Section 1-07.2(2) describes this exception.

The Contracting Agency will pay the retained percentage (or release the Contract Bond if a FHWA-funded Project) only if the Contractor has obtained from the Washington State Department of Revenue a certificate showing that all contract-related taxes have been paid (RCW 60.28.051). The Contracting Agency may deduct from its payments to the Contractor any amount the Contractor may owe the Washington State Department of Revenue, whether the amount owed relates to this contract or not. Any amount so deducted will be paid into the proper State fund.

1-07.2(1) State Sales Tax — Rule 171

WAC 458-20-171, and its related rules, apply to building, repairing, or improving streets, roads, etc., which are owned by a municipal corporation, or political subdivision of the state, or by the United States, and which are used primarily for foot or vehicular traffic. This includes storm or combined sewer systems within and included as a part of the street or road drainage system and power lines when such are part of the roadway lighting system. For work performed in such cases, the Contractor shall include Washington State Retail Sales Taxes in the various unit bid item prices, or other contract amounts, including those that the Contractor pays on the purchase of the materials, equipment, or supplies used or consumed in doing the work.

1-07.2(2) State Sales Tax — Rule 170

WAC 458-20-170, and its related rules, apply to the constructing and repairing of new or existing buildings, or other structures, upon real property. This includes, but is not limited to, the construction of streets, roads, highways, etc., owned by the state of Washington; water mains and their appurtenances; sanitary sewers and sewage disposal systems unless such sewers and disposal systems are within, and a part of, a street or road drainage system; telephone, telegraph, electrical power distribution lines, or other conduits or lines in or above streets or roads, unless such power lines become a part of a street or road lighting system; and installing or attaching of any article of tangible personal property in or to real property, whether or not such personal property becomes a part of the realty by virtue of installation.

For work performed in such cases, the Contractor shall collect from the Contracting Agency, retail sales tax on the full contract price. The Contracting Agency will automatically add this sales tax to each payment to the Contractor. For this reason, the Contractor shall not include the retail sales tax in the unit bid item prices, or in any other contract amount subject to Rule 170, with the following exception.

Exception: The Contracting Agency will not add in sales tax for a payment the Contractor or a subcontractor makes on the purchase or rental of tools, machinery, equipment, or consumable supplies not integrated into the project. Such sales taxes shall be included in the unit bid item prices or in any other contract amount.

1-07.2(3) Services

The Contractor shall not collect retail sales tax from the Contracting Agency on any contract wholly for professional or other services (as defined in Washington State Department of Revenue Rules 138 and 244).

1-07.7 Load Limits

Section 1-07.7 is supplemented with the following:

(March 13, 1995)

If the sources of materials provided by the Contractor necessitates hauling over roads other than State Highways, the Contractor shall, at the Contractor's expense, make all arrangements for the use of the haul routes.

1-07.13 Contractor's Responsibility for Work

(*****)

1-07.13(4) Repair of Damage

Section 1-07.13(4) is revised to read:

The Contractor shall promptly repair all damage to either temporary or permanent work as directed by the Engineer. For damage qualifying for relief under Sections 1-07.13(1), 1-07.13(2) or 1-07.13(3), payment will be made in accordance with Section 1-04.4. Payment will be limited to repair of damaged work only. No payment will be made for delay or disruption of work.

(*****)

1-07.14 Responsibility for Damage

Section 1-07.14 is supplemented with the following:

Indemnification. References in Standard Specification 1-07.14 to the Contractor's "agents" shall be understood to include the Contractor's subcontractors. The Contractor's responsibilities under Standard Specification 1-07.14 shall survive the termination or completion of the contract.

(April 2, 2007)

Utilities and Similar Facilities

Section 1-07.17 is supplemented with the following:

Locations and dimensions shown in the Plans for existing facilities are in accordance with available information obtained without uncovering, measuring, or other verification.

The following addresses and telephone numbers of utility companies known or suspected of having facilities within the project limits are supplied for the Contractor's convenience:

****Power:** Cowlitz Public Utility District
961 12th Avenue
Longview, Washington 98632
(360) 577-7546

Gas: Cascade Natural Gas
2688 Coweeman Park Dr.
Kelso, Washington 98626
(888) 522-1130

Nippon Dynawave Packaging Company
3401 Industrial Way
Longview, Washington 98632
(360) 425-2150

Telephone: Lumen Technologies
4501 NE Minnehaha St, Bldg II
Vancouver, WA 98661
(564) 888-2024

Kalama Telephone
PO Box 1068
Kalama, Washington 98625
(360) 673-2764

Sprint Communications
2210 S. 35th Street
Tacoma, WA 98409
(360) 402-4159

Ziply Fiber
354 S. 4th St.
P.O. Box 535
Coos Bay, OR. 97420
(503) 626-3270

Water/Sewer: City of Kelso
PO Box 819
Kelso, Washington 98626
(360) 423-6590

Cowlitz County Public Works (includes Leachate Pipeline)
1600 – 13th Avenue South
Kelso, Washington 98625
(360) 577-3030

City of Longview
Utility Operations Center
1460 Industrial Way
Longview, Washington 98632
(360) 442-5700

City of Kalama
6300 Old Pacific Highway South
Kalama, Washington 98625
(360) 673-3706

Beacon Hill Sewer District
1121 Westside Highway
Kelso, Washington 98626
(360) 636-3860

City of Castle Rock
Dave Vorse
360 "A" Street
Castle Rock, Washington 98611
(360) 274-7478

Fiber Optic: Cascade Networks
1111 11th Avenue
Longview, WA 98632-3109
(360) 414-5990

Lumen Technologies
4501 NE Minnehaha St, Bldg II
Vancouver, WA 98661
(564) 888-2024

AT&T
11241 Willows Road NE Suite 130
Redmond, WA 98052

Zayo Fiber Solutions
2101 4th Avenue, Suite 2000
Seattle, Washington 98121
(702) 755-1143

Cable: Comcast
6916 NE 40th Street
Vancouver, WA 98661
(360) 891-3204**

1-07.18 Public Liability and Property Damage Insurance

Delete this section in its entirety, and replace it with the following:

1-07.18 Insurance

(December 30, 2022 APWA GSP)

1-07.18(1) General Requirements

- A. The Contractor shall procure and maintain the insurance described in all subsections of section 1-07.18 of these Special Provisions, from insurers with a current A. M. Best rating of not less than

A-: VII and licensed to do business in the State of Washington. The Contracting Agency reserves the right to approve or reject the insurance provided, based on the insurer's financial condition.

- B. The Contractor shall keep this insurance in force without interruption from the commencement of the Contractor's Work through the term of the Contract and for thirty (30) days after the Physical Completion date, unless otherwise indicated below.
- C. If any insurance policy is written on a claims-made form, its retroactive date, and that of all subsequent renewals, shall be no later than the effective date of this Contract. The policy shall state that coverage is claims made and state the retroactive date. Claims-made form coverage shall be maintained by the Contractor for a minimum of 36 months following the Completion Date or earlier termination of this Contract, and the Contractor shall annually provide the Contracting Agency with proof of renewal. If renewal of the claims made form of coverage becomes unavailable, or economically prohibitive, the Contractor shall purchase an extended reporting period ("tail") or execute another form of guarantee acceptable to the Contracting Agency to assure financial responsibility for liability for services performed.
- D. The Contractor's Automobile Liability, Commercial General Liability and Excess or Umbrella Liability insurance policies shall be primary and non-contributory insurance as respects the Contracting Agency's insurance, self-insurance, or self-insured pool coverage. Any insurance, self-insurance, or self-insured pool coverage maintained by the Contracting Agency shall be excess of the Contractor's insurance and shall not contribute with it.
- E. The Contractor shall provide the Contracting Agency and all additional insureds with written notice of any policy cancellation, within two business days of their receipt of such notice.
- F. The Contractor shall not begin work under the Contract until the required insurance has been obtained and approved by the Contracting Agency
- G. Failure on the part of the Contractor to maintain the insurance as required shall constitute a material breach of contract, upon which the Contracting Agency may, after giving five business days' notice to the Contractor to correct the breach, immediately terminate the Contract or, at its discretion, procure or renew such insurance and pay any and all premiums in connection therewith, with any sums so expended to be repaid to the Contracting Agency on demand, or at the sole discretion of the Contracting Agency, offset against funds due the Contractor from the Contracting Agency.
- H. All costs for insurance shall be incidental to and included in the unit or lump sum prices of the Contract and no additional payment will be made.

1-07.18(2) Additional Insured

All insurance policies, with the exception of Workers Compensation, and of Professional Liability and Builder's Risk (if required by this Contract) shall name the following listed entities as additional insured(s) using the forms or endorsements required herein:

- the Contracting Agency and its officers, elected officials, employees, agents, and volunteers

The above-listed entities shall be additional insured(s) for the full available limits of liability maintained by the Contractor, irrespective of whether such limits maintained by the Contractor are greater than those required by this Contract, and irrespective of whether the Certificate of Insurance provided by the Contractor pursuant to 1-07.18(4) describes limits lower than those maintained by the Contractor.

For Commercial General Liability insurance coverage, the required additional insured endorsements shall be at least as broad as ISO forms CG 20 10 10 01 for ongoing operations and CG 20 37 10 01 for completed operations.

1-07.18(3) Subcontractors

The Contractor shall cause each subcontractor of every tier to provide insurance coverage that complies with all applicable requirements of the Contractor-provided insurance as set forth herein, except the Contractor shall have sole responsibility for determining the limits of coverage required to be obtained by subcontractors.

The Contractor shall ensure that all subcontractors of every tier add all entities listed in 1-07.18(2) as additional insureds, and provide proof of such on the policies as required by that section as detailed in 1-07.18(2) using an endorsement as least as broad as ISO CG 20 10 10 01 for ongoing operations and CG 20 37 10 01 for completed operations.

Upon request by the Contracting Agency, the Contractor shall forward to the Contracting Agency evidence of insurance and copies of the additional insured endorsements of each subcontractor of every tier as required in 1-07.18(4) Verification of Coverage.

1-07.18(4) Verification of Coverage

The Contractor shall deliver to the Contracting Agency a Certificate(s) of Insurance and endorsements for each policy of insurance meeting the requirements set forth herein when the Contractor delivers the signed Contract for the work. Failure of Contracting Agency to demand such verification of coverage with these insurance requirements or failure of Contracting Agency to identify a deficiency from the insurance documentation provided shall not be construed as a waiver of Contractor's obligation to maintain such insurance.

Verification of coverage shall include:

1. An ACORD certificate or a form determined by the Contracting Agency to be equivalent.
2. Copies of all endorsements naming Contracting Agency and all other entities listed in 1-07.18(2) as additional insured(s), showing the policy number. The Contractor may submit a copy of any blanket additional insured clause from its policies instead of a separate endorsement.
3. Any other amendatory endorsements to show the coverage required herein.
4. A notation of coverage enhancements on the Certificate of Insurance shall not satisfy these requirements – actual endorsements must be submitted.

Upon request by the Contracting Agency, the Contractor shall forward to the Contracting Agency a full and certified copy of the insurance policy(s). If Builders Risk insurance is required on this Project, a full and certified copy of that policy is required when the Contractor delivers the signed Contract for the work.

1-07.18(5) Coverages and Limits

The insurance shall provide the minimum coverages and limits set forth below. Contractor's maintenance of insurance, its scope of coverage, and limits as required herein shall not be construed to limit the liability of the Contractor to the coverage provided by such insurance, or otherwise limit the Contracting Agency's recourse to any remedy available at law or in equity.

All deductibles and self-insured retentions must be disclosed and are subject to approval by the Contracting Agency. The cost of any claim payments falling within the deductible or self-insured retention shall be the responsibility of the Contractor. In the event an additional insured incurs a liability subject to any policy's deductibles or self-insured retention, said deductibles or self-insured retention shall be the responsibility of the Contractor.

1-07.18(5)A Commercial General Liability

Commercial General Liability insurance shall be written on coverage forms at least as broad as ISO occurrence form CG 00 01, including but not limited to liability arising from premises, operations, stop gap liability, independent contractors, products-completed operations, personal and advertising injury, and liability assumed under an insured contract. There shall be no exclusion for liability arising from explosion, collapse or underground property damage.

The Commercial General Liability insurance shall be endorsed to provide a per project general aggregate limit, using ISO form CG 25 03 05 09 or an equivalent endorsement.

Contractor shall maintain Commercial General Liability Insurance arising out of the Contractor's completed operations for at least three years following Substantial Completion of the Work.

Such policy must provide the following minimum limits:

\$1,000,000	Each Occurrence
\$2,000,000	General Aggregate
\$2,000,000	Products & Completed Operations Aggregate
\$1,000,000	Personal & Advertising Injury each offence
\$1,000,000	Stop Gap / Employers' Liability each accident

1-07.18(5)B Automobile Liability

Automobile Liability shall cover owned, non-owned, hired, and leased vehicles; and shall be written on a coverage form at least as broad as ISO form CA 00 01. If the work involves the transport of pollutants, the automobile liability policy shall include MCS 90 and CA 99 48 endorsements.

Such policy must provide the following minimum limit:

\$1,000,000	Combined single limit each accident
-------------	-------------------------------------

1-07.18(5)C Workers' Compensation

The Contractor shall comply with Workers' Compensation coverage as required by the Industrial Insurance laws of the State of Washington.

1-07.23 Public Convenience And Safety

1-07.23(1) Construction Under Traffic

The second paragraph of Section 1-07.23(1) is supplemented with the following:

(*****)

The Contractor shall limit the total delay to the public, to a maximum of *** 20 *** minutes, during travel through the project. If the delay becomes greater than *** 20 *** minutes, the Contractor shall immediately begin to take action to cease the operations that are causing the delays. If the *** 20 *** minute delay limit has been exceeded, as determined by the Engineer, the Contractor shall provide to the Engineer, a written proposal to revise his work operations to meet the *** 20 *** minute limit. This proposal shall be approved by the Engineer prior to resuming any work requiring traffic control.

1-07.24 Rights of Way

(July 23, 2015 APWA GSP)

Delete this section and replace it with the following:

Street Right of Way lines, limits of easements, and limits of construction permits are indicated in the Plans. The Contractor's construction activities shall be confined within these limits, unless arrangements for use of private property are made.

Generally, the Contracting Agency will have obtained, prior to bid opening, all rights of way and easements, both permanent and temporary, necessary for carrying out the work. Exceptions to this are noted in the Bid Documents or will be brought to the Contractor's attention by a duly issued Addendum.

Whenever any of the work is accomplished on or through property other than public Right of Way, the Contractor shall meet and fulfill all covenants and stipulations of any easement agreement obtained by the Contracting Agency from the owner of the private property. Copies of the easement agreements may be included in the Contract Provisions or made available to the Contractor as soon as practical after they have been obtained by the Engineer.

Whenever easements or rights of entry have not been acquired prior to advertising, these areas are so noted in the Plans. The Contractor shall not proceed with any portion of the work in areas where right of way, easements or rights of entry have not been acquired until the Engineer certifies to the Contractor that the right of way or easement is available or that the right of entry has been received. If the Contractor is delayed due to acts of omission on the part of the Contracting Agency in obtaining easements, rights of entry or right of way, the Contractor will be entitled to an extension of time. The Contractor agrees that such delay shall not be a breach of contract.

Each property owner shall be given 48 hours notice prior to entry by the Contractor. This includes entry onto easements and private property where private improvements must be adjusted.

The Contractor shall be responsible for providing, without expense or liability to the Contracting Agency, any additional land and access thereto that the Contractor may desire for temporary construction facilities, storage of materials, or other Contractor needs. However, before using any private property, whether adjoining the work or not, the Contractor shall file with the Engineer a written permission of

the private property owner, and, upon vacating the premises, a written release from the property owner of each property disturbed or otherwise interfered with by reasons of construction pursued under this contract. The statement shall be signed by the private property owner, or proper authority acting for the owner of the private property affected, stating that permission has been granted to use the property and all necessary permits have been obtained or, in the case of a release, that the restoration of the property has been satisfactorily accomplished. The statement shall include the parcel number, address, and date of signature. Written releases must be filed with the Engineer before the Completion Date will be established.

1-08 PROSECUTION AND PROGRESS

Add the following new section:

1-08.0 Preliminary Matters

(May 25, 2006 APWA GSP)

Add the following new section:

1-08.0(1) Preconstruction Conference

(October 10, 2008 APWA GSP)

Prior to the Contractor beginning the work, a preconstruction conference will be held between the Contractor, the Engineer and such other interested parties as may be invited. The purpose of the preconstruction conference will be:

1. To review the initial progress schedule;
2. To establish a working understanding among the various parties associated or affected by the work;
3. To establish and review procedures for progress payment, notifications, approvals, submittals, etc.;
4. To establish normal working hours for the work;
5. To review safety standards and traffic control; and
6. To discuss such other related items as may be pertinent to the work.

The Contractor shall prepare and submit at the preconstruction conference the following:

1. A breakdown of all lump sum items;
2. A preliminary schedule of working drawing submittals; and
3. A list of material sources for approval if applicable.

Add the following new section:

1-08.0(2) Hours of Work

(December 8, 2014 APWA GSP)

Except in the case of emergency or unless otherwise approved by the Engineer, the normal working hours for the Contract shall be any consecutive 8-hour period between 7:00 a.m. and 6:00 p.m. Monday through Friday, exclusive of a lunch break. If the Contractor desires different than the normal working hours stated above, the request must be submitted in writing prior to the preconstruction conference, subject to the provisions below. The working hours for the Contract shall be established at or prior to the preconstruction conference.

All working hours and days are also subject to local permit and ordinance conditions (such as noise ordinances).

If the Contractor wishes to deviate from the established working hours, the Contractor shall submit a written request to the Engineer for consideration. This request shall state what hours are being requested, and why. Requests shall be submitted for review no later than 10 am prior to the day(s) the Contractor is requesting to change the hours.

If the Contracting Agency approves such a deviation, such approval may be subject to certain other conditions, which will be detailed in writing. For example:

1. On non-Federal aid projects, requiring the Contractor to reimburse the Contracting Agency for the costs in excess of straight-time costs for Contracting Agency representatives who worked during such times. (The Engineer may require designated representatives to be present during the work. Representatives who may be deemed necessary by the Engineer include, but are not limited to: survey crews; personnel from the Contracting Agency's material testing lab; inspectors; and other Contracting Agency employees or third party consultants when, in the opinion of the Engineer, such work necessitates their presence.)
2. Considering the work performed on Saturdays, Sundays, and holidays as working days with regard to the contract time.
3. Considering multiple work shifts as multiple working days with respect to contract time even though the multiple shifts occur in a single 24-hour period.
4. If a 4-10 work schedule is requested and approved the non-working day for the week will be charged as a working day.
5. If Davis Bacon wage rates apply to this Contract, all requirements must be met and recorded properly on certified payroll.

1-08.0(3) Reimbursement for Overtime Work of Contracting Agency Employees

(May 25, 2006 APWA GSP)

Where the Contractor elects to work on a Saturday, Sunday, or holiday, or longer than an 8-hour work shift on a regular working day, as defined in the Standard Specifications, such work shall be considered

as overtime work. On all such overtime work an inspector will be present, and a survey crew may be required at the discretion of the Engineer. In such case, the Contracting Agency may deduct from amounts due or to become due to the Contractor for the costs in excess of the straight-time costs for employees of the Contracting Agency required to work overtime hours.

The Contractor by these specifications does hereby authorize the Engineer to deduct such costs from the amount due or to become due to the Contractor.

1-08.1 Subcontracting

Section 1-08.1 is supplemented with the following:

(*****)

The Contractor shall ensure that each subcontractor (in any tier) agrees in writing to: (a) perform its work in strict compliance with these contract documents; and (b) defend, indemnify, and hold harmless Cowlitz County (and its officials, employees, and agents) from claims and liabilities arising from the subcontractor's acts and omissions, to the same extent provided in Standard Specification 1-07.14 for the Contractor. Upon request, the Contractor will promptly provide the Engineer with a copy of any subcontract.

The Contractor shall include the language of this section in each of its first tier subcontracts, and shall require each of its subcontractors to include the same language of this section in each of their subcontracts, adjusting only as necessary the terms used for the contracting parties. Upon request of the Owner, the Contractor shall promptly provide documentation to the Owner demonstrating that the subcontractor meets the subcontractor responsibility criteria below. The requirements of this section apply to all subcontractors regardless of tier.

At the time of subcontract execution, the Contractor shall verify that each of its first tier subcontractors meets the following bidder responsibility criteria:

1. Have a current certificate of registration in compliance with chapter 18.27 RCW, which must have been in effect at the time of subcontract bid submittal;
2. Have a current Washington Unified Business Identifier (UBI) number;
3. If applicable, have:
 - a. Have Industrial Insurance (workers' compensation) coverage for the subcontractor's employees working in Washington, as required in Title 51 RCW;
 - b. A Washington Employment Security Department number, as required in Title 50 RCW;
 - c. A Washington Department of Revenue state excise tax registration number, as required in Title 82 RCW;
 - d. An electrical contractor license, if required by Chapter 19.28 RCW;

- e. An elevator contractor license, if required by Chapter 70.87 RCW.
- 4. Not be disqualified from bidding on any public works contract under RCW 39.06.010 or 39.12.065 (3).

1-08.3 Progress Schedule.

Add the following to Section 1-08.3:

(*****)

A critical path schedule shall be submitted by the Contractor for review and approval by the Engineer prior to the preconstruction meeting. Work shall not begin until the critical path schedule is approved. Any deviation from the approved critical path must be submitted to the Engineer with a modified critical path schedule two (2) working days prior to the proposed deviation. Approval must be received from the Engineer prior to proceeding with the deviation. Costs for the critical path schedule shall be included in the bid items of this contract and will not be paid for individually.

1-08.5 Time for Completion

Section 1-08.5 is supplemented with the following:

(March 13, 1995)

This project shall be physically completed within *** 30 *** working days.

1-08.9 Liquidated Damages

(March 3, 2021 APWA GSP, Option B)

Revise the second and third paragraphs to read:

Accordingly, the Contractor agrees:

1. To pay (according to the following formula) liquidated damages for each working day beyond the number of working days established for Physical Completion, and
2. To authorize the Engineer to deduct these liquidated damages from any money due or coming due to the Contractor.

Liquidated Damages Formula

$$LD=0.15C/T$$

Where:

LD = liquidated damages per working day (rounded to the nearest dollar)
C = original Contract amount
T = original time for Physical Completion

When the Contract Work has progressed to Substantial Completion as defined in the Contract, the Engineer may determine the Contract Work is Substantially Complete. The Engineer will notify the Contractor in writing of the Substantial Completion Date. For overruns in Contract time occurring after the date so established, the formula for liquidated damages shown above will not apply. For overruns in Contract time occurring after the Substantial Completion Date, liquidated damages shall be assessed on the basis of direct engineering and related costs assignable to the project until the actual Physical Completion Date of all the Contract Work. The Contractor shall complete the remaining Work as promptly as possible. Upon request by the Project Engineer, the Contractor shall furnish a written schedule for completing the physical Work on the Contract.

1-09 MEASUREMENT AND PAYMENT

1-09.6 Force Account

(October 10, 2008 APWA GSP)

Supplement this section with the following:

The Contracting Agency has estimated and included in the Proposal, dollar amounts for all items to be paid per force account, only to provide a common proposal for Bidders. All such dollar amounts are to become a part of Contractor's total bid. However, the Contracting Agency does not warrant expressly or by implication, that the actual amount of work will correspond with those estimates. Payment will be made on the basis of the amount of work actually authorized by Engineer.

1-09.9 Payments

(December 30, 2022 APWA GSP)

Section 1-09.9 is revised to read:

The basis of payment will be the actual quantities of Work performed according to the Contract and as specified for payment.

The Contractor shall submit a breakdown of the cost of lump sum bid items at the Preconstruction Conference, to enable the Project Engineer to determine the Work performed on a monthly basis. A breakdown is not required for lump sum items that include a basis for incremental payments as part of the respective Specification. Absent a lump sum breakdown, the Project Engineer will make a determination based on information available. The Project Engineer's determination of the cost of work shall be final.

Progress payments for completed work and material on hand will be based upon progress estimates prepared by the Engineer. A progress estimate cutoff date will be established at the preconstruction conference.

The initial progress estimate will be made not later than 30 days after the Contractor commences the work, and successive progress estimates will be made every month thereafter until the Completion Date. Progress estimates made during progress of the work are tentative, and made only for the purpose

of determining progress payments. The progress estimates are subject to change at any time prior to the calculation of the final payment.

The value of the progress estimate will be the sum of the following:

1. Unit Price Items in the Bid Form — the approximate quantity of acceptable units of work completed multiplied by the unit price.
2. Lump Sum Items in the Bid Form — based on the approved Contractor's lump sum breakdown for that item, or absent such a breakdown, based on the Engineer's determination.
3. Materials on Hand — 100 percent of invoiced cost of material delivered to Job site or other storage area approved by the Engineer.
4. Change Orders — entitlement for approved extra cost or completed extra work as determined by the Engineer.

Progress payments will be made in accordance with the progress estimate less:

1. Retainage per Section 1-09.9(1), on non FHWA-funded projects;
2. The amount of progress payments previously made; and
3. Funds withheld by the Contracting Agency for disbursement in accordance with the Contract Documents.

Progress payments for work performed shall not be evidence of acceptable performance or an admission by the Contracting Agency that any work has been satisfactorily completed. The determination of payments under the contract will be final in accordance with Section 1-05.1.

Failure to perform obligations under the Contract by the Contractor may be decreed by the Contracting Agency to be adequate reason for withholding any payments until compliance is achieved.

Upon completion of all Work and after final inspection (Section 1-05.11), the amount due the Contractor under the Contract will be paid based upon the final estimate made by the Engineer and presentation of a Final Contract Voucher Certification to be signed by the Contractor. The Contractor's signature on such voucher shall be deemed a release of all claims of the Contractor unless a Certified Claim is filed in accordance with the requirements of Section 1-09.11 and is expressly excepted from the Contractor's certification on the Final Contract Voucher Certification. The date the Contracting Agency signs the Final Contract Voucher Certification constitutes the final acceptance date (Section 1-05.12).

If the Contractor fails, refuses, or is unable to sign and return the Final Contract Voucher Certification or any other documentation required for completion and final acceptance of the Contract, the Contracting Agency reserves the right to establish a Completion Date (for the purpose of meeting the requirements of RCW 60.28) and unilaterally accept the Contract. Unilateral final acceptance will occur only after the Contractor has been provided the opportunity, by written request from the Engineer, to voluntarily submit such documents. If voluntary compliance is not achieved, formal notification of the impending establishment of a Completion Date and unilateral final acceptance will be provided by email with delivery confirmation from the Contracting Agency to the Contractor, which will provide 30 calendar days for the Contractor to submit the necessary documents. The 30 calendar day period will begin on the date the email with delivery confirmation is received by the Contractor. The date the Contracting Agency unilaterally signs the Final Contract Voucher Certification shall constitute the Completion Date and the final acceptance date (Section 1-05.12). The reservation by the Contracting Agency to

unilaterally accept the Contract will apply to Contracts that are Physically Completed in accordance with Section 1-08.5, or for Contracts that are terminated in accordance with Section 1-08.10. Unilateral final acceptance of the Contract by the Contracting Agency does not in any way relieve the Contractor of their responsibility to comply with all Federal, State, tribal, or local laws, ordinances, and regulations that affect the Work under the Contract.

Payment to the Contractor of partial estimates, final estimates, and retained percentages shall be subject to controlling laws.

(March 13, 2012 APWA GSP)

Supplement this section with the following:

Lump sum item breakdowns are not required when the bid price for the lump sum item is less than \$20,000.

Section 1-09.9 is supplemented with the following:

(*****)

Partial Payments. Partial payments shall be made once each month, based on estimates prepared by the Engineer. The Contractor shall prepare a document detailing work and labor performed and material furnished during each calendar month, and shall deliver the document to the Engineer by the fifth day of the following month. The documentation shall be in a format prescribed by the Engineer. If the Contractor's documentation is timely submitted, the County Auditor will issue a warrant payable to the Contractor on the last working day of the month, based on the estimate prepared by the Engineer.

1-09.11(3) Time Limitation and Jurisdiction

(December 30, 2022 APWA GSP)

Revise this section to read:

For the convenience of the parties to the Contract it is mutually agreed by the parties that all claims or causes of action which the Contractor has against the Contracting Agency arising from the Contract shall be brought within 180 calendar days from the date of final acceptance (Section 1-05.12) of the Contract by the Contracting Agency; and it is further agreed that all such claims or causes of action shall be brought only in the Superior Court of the county where the Contracting Agency headquarters is located, provided that where an action is asserted against a county, RCW 36.01.050 shall control venue and jurisdiction. The parties understand and agree that the Contractor's failure to bring suit within the time period provided, shall be a complete bar to all such claims or causes of action. It is further mutually agreed by the parties that when claims or causes of action which the Contractor asserts against the Contracting Agency arising from the Contract are filed with the Contracting Agency or initiated in court, the Contractor shall permit the Contracting Agency to have timely access to all records deemed necessary by the Contracting Agency to assist in evaluating the claims or action.

1-09.13(3)A Arbitration General
(January 19, 2022 APWA GSP)

Revise the third paragraph to read:

The Contracting Agency and the Contractor mutually agree to be bound by the decision of the arbitrator, and judgment upon the award rendered by the arbitrator may be entered in the Superior Court of the county in which the Contracting Agency's headquarters is located, provided that where claims subject to arbitration are asserted against a county, RCW 36.01.050 shall control venue and jurisdiction of the Superior Court. The decision of the arbitrator and the specific basis for the decision shall be in writing. The arbitrator shall use the Contract as a basis for decisions.

BID ITEMS

BID ITEMS 1, 14 AND 22: MISCELLANEOUS CONSTRUCTION

This bid item shall be accomplished in accordance with the Plans and Standard Specification Section 1-09.6, except as modified below.

1-09.6 Force Account

Insert the following paragraph before the first paragraph of Section 1-09.6, which begins "The terms of the contract or of a change order may call...":

The Miscellaneous Construction bid item has been included for any additional work directed by the Engineer that is not required by the original contract. The amount indicated in the proposal for this bid item is to provide a common bid amount. The actual amount paid under this bid item may vary from no payment to the full amount of the bid item.

Add the following to Section 1-09.6:

In lieu of the preceding prescribed method of determining payment for force account work, payment may be made at unit prices or lump sum prices agreed to by the Engineer and the Contractor, prior to beginning the Miscellaneous Construction work.

BID ITEMS 2, 15 AND 23: MOBILIZATION

This bid item shall be accomplished in accordance with the Plans and Standard Specification Section 1-09.7.

BID ITEMS 3, 16 AND 24: FLAGGERS**BID ITEM 4: CONTRACTOR PILOTED TRAFFIC CONTROL**

These bid items shall be accomplished in accordance with the Plans and Standard Specification and Special Provisions Sections 1-07 and 1-10, except as modified below:

1-10 TEMPORARY TRAFFIC CONTROL**1-10.2 Traffic Control Management
General**

Section 1-10.2(1) is supplemented with the following:

(October 3, 2022)

The Traffic Control Supervisor shall be certified by one of the following:

The Northwest Laborers-Employers Training Trust
27055 Ohio Ave.
Kingston, WA 98346
(360) 297-3035
<https://www.nwlett.edu>

Evergreen Safety Council
12545 135th Ave. NE
Kirkland, WA 98034-8709
1-800-521-0778
<https://www.esc.org>

The American Traffic Safety Services Association
15 Riverside Parkway, Suite 100
Fredericksburg, Virginia 22406-1022
Training Dept. Toll Free (877) 642-4637
Phone: (540) 368-1701
<https://atssa.com/training>

Integrity Safety
13912 NE 20th Ave.
Vancouver, WA 98686
(360) 574-6071
<https://www.integritysafety.com>

US Safety Alliance
(904) 705-5660
<https://www.ussafetyalliance.com>

K&D Services Inc.
2719 Rockefeller Ave.
Everett, WA 98201
(800) 343-4049
<https://www.kndservices.net>

1-10.3 Traffic Control Labor, Procedures, and Devices

1-10.3(3)A Construction Signs

(*****)

The first paragraph of Section 1-10.3(3)A is revised to read as follows:

All signs required by the approved traffic control plan(s) as well as any other appropriate signs prescribed by the Engineer shall be furnished by the Contractor. The Contractor shall provide the posts or supports and erect and maintain the signs in a clean, neat, and presentable condition until the necessity for them has ceased. When the need for these signs has ceased, the Contractor, upon approval of the Engineer, shall remove all signs, posts, and supports from the project and they shall remain the property of the Contractor. There shall be no intermixing of signs with non-fluorescent orange reflective sign sheeting and signs with fluorescent orange reflective sign sheeting on the same signpost.

The third paragraph of Section 1-10.3(3)A is supplemented with the following:

The Contractor shall furnish, install, and remove all construction signs and all cones, barricades, flashers, and other traffic control devices of a temporary and portable nature. The Contractor shall maintain all signs and other traffic control devices.

"MOTORCYCLES USE EXTREME CAUTION" signs per W21-1701 of the WSDOT Sign Fabrication Manual shall be supplied by the Contractor if there will be grooved pavement, abrupt lane edges, steel plates or gravel-or-earth surfaced roadways within the project limits. The Contractor shall include the signs in the Traffic Control Plan and install the signs in advance of the work zone and maintain the signs for as long as the above conditions are present. These signs are in addition to any other signs stating the condition of the roadway. MOTORCYCLES USE EXTREME CAUTION" signs shall be considered Class B signs.

The seventh paragraph of Section 1-10.3(3)A is revised to read as follows:

Signs, posts, or supports that are lost, stolen, damaged, destroyed, or which the Engineer deems to be unacceptable while their use is required on the project, shall be replaced by the Contractor without additional compensation.

1-10.4 Measurement

(*****)

Delete Section 1-10.4(2) and replace with the following:

Section 1-10.4(2) Item Bids With Lump Sum for Incidentals

When the Bid Proposal does not contain the item “Project Temporary Traffic Control”, Sections 1-10.4(1) and 1-10.5(1) are deleted and the Bid Proposal will contain some or all of the following items, measured as noted.

“Flaggers” will be measured by the hour. Hours will be measured for each flagging station, shown on an approved Traffic Control Plan, when that station is staffed in accordance with Section 1-10.3(1)A. When a flagging station is staffed on an intermittent basis, no deduction will be made in measured hours provided that the person staffing the station is in a standby mode and is not performing other duties. Hours will also be measured for flaggers performing the duties of setting up and removing traffic control signs and devices before and after the flagging stations are staffed.

“Contractor Piloted Traffic Control” will be by the hour for any one pilot car control area.

1-10.5 Payment

1-10.5(2) Item Bids With Lump Sum for Incidentals

Add the following to Section 1-10.5(2):

(*****)

“Contractor Piloted Traffic Control”, per hour.

The unit contract price per hour shall be full pay for all costs involved in furnishing the pilot car(s), pilot car driver(s), and the appropriate pilot car sign(s) for any one pilot car operation. Any necessary flaggers will be paid under the item for flaggers.

There will be no adjustment of the unit Contract price per hour for Contractor Piloted Traffic Control due to overtime work unless the Engineer has specifically directed such overtime work.

Delete the fifth and sixth paragraphs of Section 1-10.5(2), which begin ““Flaggers’, per hour.” and “The unit Contract price...”, respectively, and replace with the following:

(*****)

“Flaggers”, per hour.

The unit Contract price, when applied to the number of units measured for this item in accordance with Section 1-10.4(2), shall be full compensation for all costs incurred by the Contractor in performing the Work defined in Section 1-10.3(1)A and Section 1-10.3(1)B. Payment for Flaggers shall also include performing the duties of the Traffic Control Supervisor, furnishing, installing and removing construction signs, barricades, flashers, cones, traffic safety drums, and other temporary traffic control devices.

Cowlitz County will not in any event pay for Flaggers at overtime rates unless the Engineer has specifically directed such overtime work.

BID ITEM 5: HMA CLASS 3/8 INCH PG 58H-22 (CASTLE ROCK AREA)

BID ITEM 6: HMA CLASS 3/8 INCH PG 58H-22 (KALAMA AREA)

BID ITEM 7: HMA CLASS 3/8 INCH PG 58H-22 (KELSO AREA)

BID ITEM 8: HMA CLASS 3/8 INCH PG 58H-22 (LONGVIEW AREA)

BID ITEMS 17 AND 25: HMA CLASS 3/8 Inch PG 58H-22

BID ITEM 9: HMA CLASS 3/8 Inch PG 58H-22 FOR APPROACH

BID ITEMS 10 AND 18: PLANING BITUMINOUS PAVEMENT

BID ITEMS 11, 19 AND 26: ASPHALT COST PRICE ADJUSTMENT

These bid items shall be accomplished in accordance with the Plans, the following APWA GSP for Section 5-04, as modified by Cowlitz County, and the subsequently following WSDOT GSP for Asphalt Cost Price Adjustment. Cowlitz County modifications to the APWA GSP are shown as underlined text for additions and as strikethrough text for deletions.

5-04 Hot Mix Asphalt

(July 18, 2018 APWA GSP)

Delete Section 5-04 and amendments, Hot Mix Asphalt and replace it with the following:

5-04.1 Description

This Work shall consist of providing and placing one or more layers of plant-mixed hot mix asphalt (HMA) on a prepared foundation or base in accordance with these Specifications and the lines, grades, thicknesses, and typical cross-sections shown in the Plans. The manufacture of HMA may include warm mix asphalt (WMA) processes in accordance with these Specifications. WMA processes include organic additives, chemical additives, and foaming.

HMA shall be composed of asphalt binder and mineral materials as may be required, mixed in the proportions specified to provide a homogeneous, stable, and workable mixture.

5-04.2 Materials

Materials shall meet the requirements of the following sections:

Asphalt Binder	9-02.1(4)
Cationic Emulsified Asphalt	9-02.1(6)
Anti-Stripping Additive	9-02.4
HMA Additive	9-02.5
Aggregates	9-03.8
Recycled Asphalt Pavement	9-03.8(3)B
Mineral Filler	9-03.8(5)
Recycled Material	9-03.21
Portland Cement	9-01
Sand	9-03.1(2)
(As noted in 5-04.3(5)C for crack sealing)	
Joint Sealant	9-04.2
Foam Backer Rod	9-04.2(3)A

The Contract documents may establish that the various mineral materials required for the manufacture of HMA will be furnished in whole or in part by the Contracting Agency. If the documents do not establish the furnishing of any of these mineral materials by the Contracting Agency, the Contractor shall be required to furnish such materials in the amounts required for the designated mix. Mineral materials include coarse and fine aggregates, and mineral filler.

The Contractor may choose to utilize recycled asphalt pavement (RAP) in the production of HMA. The RAP may be from pavements removed under the Contract, if any, or pavement material from an existing stockpile.

The Contractor may use up to 20 percent RAP by total weight of HMA with no additional sampling or testing of the RAP. The RAP shall be sampled and tested at a frequency of one sample for every 1,000 tons produced and not less than ten samples per project. The asphalt content and gradation test data shall be reported to the Contracting Agency when submitting the mix design for approval on the QPL. The Contractor shall include the RAP as part of the mix design as defined in these Specifications.

The grade of asphalt binder shall be as required by the Contract. Blending of asphalt binder from different sources is not permitted.

The Contractor may only use warm mix asphalt (WMA) processes in the production of HMA with 20 percent or less RAP by total weight of HMA. The Contractor shall submit to the Engineer for approval the process that is proposed and how it will be used in the manufacture of HMA.

Production of aggregates shall comply with the requirements of Section 3-01.

Preparation of stockpile site, the stockpiling of aggregates, and the removal of aggregates from stockpiles shall comply with the requirements of Section 3-02.

5-04.2(1) How to Get an HMA Mix Design on the QPL

If the contractor wishes to submit a mix design for inclusion in the Qualified Products List (QPL), please follow the WSDOT process outlined in Standard Specification 5-04.2(1).

5-04.2(1) Vacant

5-04.2(2) Mix Design – Obtaining Project Approval

No paving shall begin prior to the approval of the mix design by the Engineer.

Nonstatistical evaluation will be used for all HMA not designated as Commercial HMA in the contract documents.

Commercial evaluation will be used for Commercial HMA and for other classes of HMA in the following applications: sidewalks, road approaches, ditches, slopes, paths, trails, gores, prelevel, and pavement repair. Other nonstructural applications of HMA accepted by commercial evaluation shall be as approved by the Project Engineer. Sampling and testing of HMA accepted by commercial evaluation will

be at the option of the Project Engineer. The Proposal quantity of HMA that is accepted by commercial evaluation will be excluded from the quantities used in the determination of nonstatistical evaluation.

Nonstatistical Mix Design. Fifteen days prior to the first day of paving the contractor shall provide one of the following mix design verification certifications for Contracting Agency review;

- The WSDOT Mix Design Evaluation Report from the current WSDOT QPL, or one of the mix design verification certifications listed below.
- The proposed HMA mix design on WSDOT Form 350-042 with the seal and certification (stamp & signature) of a valid licensed Washington State Professional Engineer.
- The Mix Design Report for the proposed HMA mix design developed by a qualified City or County laboratory that is within one year of the approval date.**

The mix design shall be performed by a lab accredited by a national authority such as Laboratory Accreditation Bureau, L-A-B for Construction Materials Testing, The Construction Materials Engineering Council (CMEC's) ISO 17025 or AASHTO Accreditation Program (AAP) and shall supply evidence of participation in the AASHTO: resource proficiency sample program.

Mix designs for HMA accepted by Nonstatistical evaluation shall;

- Have the aggregate structure and asphalt binder content determined in accordance with WSDOT Standard Operating Procedure 732 and meet the requirements of Sections 9-03.8(2), except that Hamburg testing for ruts and stripping are at the discretion of the Engineer, and 9-03.8(6).
- Have anti-strip requirements, if any, for the proposed mix design determined in accordance with AASHTO T 283 or T 324 or based on historic anti-strip and aggregate source compatibility from previous WSDOT lab testing.

At the discretion of the Engineer, agencies may accept verified mix designs older than 12 months from the original verification date with a certification from the Contractor that the materials and sources are the same as those shown on the original mix design.

Commercial Evaluation Approval of a mix design for "Commercial Evaluation" will be based on a review of the Contractor's submittal of WSDOT Form 350-042 (For commercial mixes, AASHTO T 324 evaluation is not required) or a Mix Design from the current WSDOT QPL or from one of the processes allowed by this section. Testing of the HMA by the Contracting Agency for mix design approval is not required.

For the Bid Item Commercial HMA, the Contractor shall select a class of HMA and design level of Equivalent Single Axle Loads (ESAL's) appropriate for the required use.

5-04.2(2)B Using Warm Mix Asphalt Processes

The Contractor may elect to use additives that reduce the optimum mixing temperature or serve as a compaction aid for producing HMA. Additives include organic additives, chemical additives and foaming processes. The use of Additives is subject to the following:

- Do not use additives that reduce the mixing temperature more than allowed in Section 5-04.3(6) in the production of mixtures.

- Before using additives, obtain the Engineer's approval using WSDOT Form 350-076 to describe the proposed additive and process.

5-04.3 Construction Requirements

5-04.3(1) Weather Limitations

Do not place HMA for wearing course on any Traveled Way beginning October 1st through March 31st of the following year without written concurrence from the Engineer.

Do not place HMA on any wet surface, or when the average surface temperatures are less than those specified below, or when weather conditions otherwise prevent the proper handling or finishing of the HMA.

Minimum Surface Temperature for Paving

Compacted Thickness (Feet)	Wearing Course	Other Courses
Less than 0.10	55°F	45°F
0.10 to .20	45°F	35°F
More than 0.20	35°F	35°F

5-04.3(2) Paving Under Traffic

When the Roadway being paved is open to traffic, the requirements of this Section shall apply.

The Contractor shall keep intersections open to traffic at all times except when paving the intersection or paving across the intersection. During such time, and provided that there has been an advance warning to the public, the intersection may be closed for the minimum time required to place and compact the mixture. In hot weather, the Engineer may require the application of water to the pavement to accelerate the finish rolling of the pavement and to shorten the time required before reopening to traffic.

Before closing an intersection, advance warning signs shall be placed and signs shall also be placed marking the detour or alternate route.

During paving operations, temporary pavement markings shall be maintained throughout the project. Temporary pavement markings shall be installed on the Roadway prior to opening to traffic. Temporary pavement markings shall be in accordance with Section 8-23.

All costs in connection with performing the Work in accordance with these requirements, except the cost of temporary pavement markings, shall be included in the unit Contract prices for the various Bid items involved in the Contract.

5-04.3(3) Equipment

5-04.3(3)A Mixing Plant

Plants used for the preparation of HMA shall conform to the following requirements:

1. **Equipment for Preparation of Asphalt Binder** – Tanks for the storage of asphalt binder shall be equipped to heat and hold the material at the required temperatures. The heating shall be accomplished by steam coils, electricity, or other approved means so that no flame shall be in contact with the storage tank. The circulating system for the asphalt binder shall be designed to ensure proper and continuous circulation during the operating period. A valve for the purpose of sampling the asphalt binder shall be placed in either the storage tank or in the supply line to the mixer.
2. **Thermometric Equipment** – An armored thermometer, capable of detecting temperature ranges expected in the HMA mix, shall be fixed in the asphalt binder feed line at a location near the charging valve at the mixer unit. The thermometer location shall be convenient and safe for access by Inspectors. The plant shall also be equipped with an approved dial-scale thermometer, a mercury actuated thermometer, an electric pyrometer, or another approved thermometric instrument placed at the discharge chute of the drier to automatically register or indicate the temperature of the heated aggregates. This device shall be in full view of the plant operator.
3. **Heating of Asphalt Binder** – The temperature of the asphalt binder shall not exceed the maximum recommended by the asphalt binder manufacturer nor shall it be below the minimum temperature required to maintain the asphalt binder in a homogeneous state. The asphalt binder shall be heated in a manner that will avoid local variations in heating. The heating method shall provide a continuous supply of asphalt binder to the mixer at a uniform average temperature with no individual variations exceeding 25°F. Also, when a WMA additive is included in the asphalt binder, the temperature of the asphalt binder shall not exceed the maximum recommended by the manufacturer of the WMA additive.
4. **Sampling and Testing of Mineral Materials** – The HMA plant shall be equipped with a mechanical sampler for the sampling of the mineral materials. The mechanical sampler shall meet the requirements of Section 1-05.6 for the crushing and screening operation. The Contractor shall provide for the setup and operation of the field-testing facilities of the Contracting Agency as provided for in Section 3-01.2(2).
5. **Sampling HMA** – The HMA plant shall provide for sampling HMA by one of the following methods:
 - a. A mechanical sampling device attached to the HMA plant.
 - b. Platforms or devices to enable sampling from the hauling vehicle without entering the hauling vehicle.

5-04.3(3)B Hauling Equipment

Trucks used for hauling HMA shall have tight, clean, smooth metal beds and shall have a cover of canvas or other suitable material of sufficient size to protect the mixture from adverse weather. Whenever the weather conditions during the work shift include, or are forecast to include, precipitation or an air temperature less than 45°F or when time from loading to unloading exceeds 30 minutes, the cover shall be securely attached to protect the HMA.

The contractor shall provide an environmentally benign means to prevent the HMA mixture from adhering to the hauling equipment. Excess release agent shall be drained prior to filling hauling equipment with HMA. Petroleum derivatives or other coating material that contaminate or alter the characteristics of the HMA shall not be used. For live bed trucks, the conveyor shall be in operation during the process of applying the release agent.

5-04.3(3)C Pavers

HMA pavers shall be self-contained, power-propelled units, provided with an internally heated vibratory screed and shall be capable of spreading and finishing courses of HMA plant mix material in lane widths required by the paving section shown in the Plans.

The HMA paver shall be in good condition and shall have the most current equipment available from the manufacturer for the prevention of segregation of the HMA mixture installed, in good condition, and in working order. The equipment certification shall list the make, model, and year of the paver and any equipment that has been retrofitted.

The screed shall be operated in accordance with the manufacturer's recommendations and shall effectively produce a finished surface of the required evenness and texture without tearing, shoving, segregating, or gouging the mixture. A copy of the manufacturer's recommendations shall be provided upon request by the Contracting Agency. Extensions will be allowed provided they produce the same results, including ride, density, and surface texture as obtained by the primary screed. Extensions without augers and an internally heated vibratory screed shall not be used in the Traveled Way.

When specified in the Contract, reference lines for vertical control will be required. Lines shall be placed on both outer edges of the Traveled Way of each Roadway. Horizontal control utilizing the reference line will be permitted. The grade and slope for intermediate lanes shall be controlled automatically from reference lines or by means of a mat referencing device and a slope control device. When the finish of the grade prepared for paving is superior to the established tolerances and when, in the opinion of the Engineer, further improvement to the line, grade, cross-section, and smoothness can best be achieved without the use of the reference line, a mat referencing device may be substituted for the reference line. Substitution of the device will be subject to the continued approval of the Engineer. A joint matcher may be used subject to the approval of the Engineer. The reference line may be removed after the completion of the first course of HMA when approved by the Engineer. Whenever the Engineer determines that any of these methods are failing to provide the necessary vertical control, the reference lines will be reinstalled by the Contractor.

The Contractor shall furnish and install all pins, brackets, tensioning devices, wire, and accessories necessary for satisfactory operation of the automatic control equipment.

If the paving machine in use is not providing the required finish, the Engineer may suspend Work as allowed by Section 1-08.6. Any cleaning or solvent type liquids spilled on the pavement shall be thoroughly removed before paving proceeds.

5-04.3(3)D Material Transfer Device or Material Transfer Vehicle

A Material Transfer Device/Vehicle (MTD/V) shall only be used with the Engineer's approval, unless otherwise required by the contract.

Where an MTD/V is required by the contract, the Engineer may approve paving without an MTD/V, at the request of the Contractor. The Engineer will determine if an equitable adjustment in cost or time is due.

When used, the MTD/V shall mix the HMA after delivery by the hauling equipment and prior to laydown by the paving machine. Mixing of the HMA shall be sufficient to obtain a uniform temperature throughout the mixture. If a windrow elevator is used, the length of the windrow may be limited in urban areas or through intersections, at the discretion of the Engineer.

To be approved for use, an MTV:

1. Shall be self-propelled vehicle, separate from the hauling vehicle or paver.
2. Shall not be connected to the hauling vehicle or paver.
3. May accept HMA directly from the haul vehicle or pick up HMA from a windrow.
4. Shall mix the HMA after delivery by the hauling equipment and prior to placement into the paving machine.
5. Shall mix the HMA sufficiently to obtain a uniform temperature throughout the mixture.

To be approved for use, an MTD:

1. Shall be positively connected to the paver.
2. May accept HMA directly from the haul vehicle or pick up HMA from a windrow.
3. Shall mix the HMA after delivery by the hauling equipment and prior to placement into the paving machine.
4. Shall mix the HMA sufficiently to obtain a uniform temperature throughout the mixture.

5-04.3(3)E Rollers

Rollers shall be of the steel wheel, vibratory, oscillatory, or pneumatic tire type, in good condition and capable of reversing without backlash. Operation of the roller shall be in accordance with the manufacturer's recommendations. When ordered by the Engineer for any roller planned for use on the project, the Contractor shall provide a copy of the manufacturer's recommendation for the use of that roller for compaction of HMA. The number and weight of rollers shall be sufficient to compact the mixture in compliance with the requirements of Section 5-04.3(10). The use of equipment that results in crushing of the aggregate will not be permitted. Rollers producing pickup, washboard, uneven compaction of the surface, displacement of the mixture or other undesirable results shall not be used.

5-04.3(4) Preparation of Existing Paved Surfaces

When the surface of the existing pavement or old base is irregular, the Contractor shall bring it to a uniform grade and cross-section as shown on the Plans or approved by the Engineer.

Preleveling of uneven or broken surfaces over which HMA is to be placed may be accomplished by using an asphalt paver, a motor patrol grader, or by hand raking, as approved by the Engineer.

Compaction of preleveling HMA shall be to the satisfaction of the Engineer and may require the use of small steel wheel rollers, plate compactors, or pneumatic rollers to avoid bridging across preleveled

areas by the compaction equipment. Equipment used for the compaction of preleveling HMA shall be approved by the Engineer.

Before construction of HMA on an existing paved surface, the entire surface of the pavement shall be clean. All fatty asphalt patches, grease drippings, and other objectionable matter shall be entirely removed from the existing pavement. All pavements or bituminous surfaces shall be thoroughly cleaned of dust, soil, pavement grindings, and other foreign matter. All holes and small depressions shall be filled with an appropriate class of HMA. The surface of the patched area shall be leveled and compacted thoroughly. Prior to the application of tack coat, or paving, the condition of the surface shall be approved by the Engineer.

A tack coat of asphalt shall be applied to all paved surfaces on which any course of HMA is to be placed or abutted; ~~except that tack coat may be omitted from clean, newly paved surfaces at the discretion of the Engineer.~~ Tack coat shall be uniformly applied to cover the existing pavement with a thin film of residual asphalt free of streaks and bare spots at a rate between 0.02 and 0.10 gallons per square yard of retained asphalt. The rate of application shall be approved by the Engineer. A heavy application of tack coat shall be applied to all joints. For Roadways open to traffic, the application of tack coat shall be limited to surfaces that will be paved during the same working shift. The spreading equipment shall be equipped with a thermometer to indicate the temperature of the tack coat material.

Equipment shall not operate on tacked surfaces until the tack has broken and cured. If the Contractor's operation damages the tack coat it shall be repaired prior to placement of the HMA.

The tack coat shall be CSS-1, or CSS-1h emulsified asphalt. The CSS-1 and CSS-1h emulsified asphalt may be diluted once with water at a rate not to exceed one part water to one part emulsified asphalt. The tack coat shall have sufficient temperature such that it may be applied uniformly at the specified rate of application and shall not exceed the maximum temperature recommended by the emulsified asphalt manufacturer.

5-04.3(4)A Crack Sealing

5-04.3(4)A1 General

When the Proposal includes a pay item for crack sealing, seal all cracks ¼ inch in width and greater.

Cleaning: Ensure that cracks are thoroughly clean, dry and free of all loose and foreign material when filling with crack sealant material. Use a hot compressed air lance to dry and warm the pavement surfaces within the crack immediately prior to filling a crack with the sealant material. Do not overheat pavement. Do not use direct flame dryers. Routing cracks is not required.

Sand Slurry: For cracks that are to be filled with sand slurry, thoroughly mix the components and pour the mixture into the cracks until full. Add additional CSS-1 cationic emulsified asphalt to the sand slurry as needed for workability to ensure the mixture will completely fill the cracks. Strike off the sand slurry flush with the existing pavement surface and allow the mixture to cure. Top off cracks that were not completely filled with additional sand slurry. Do not place the HMA overlay until the slurry has fully cured.

The sand slurry shall consist of approximately 20 percent CSS-1 emulsified asphalt, approximately 2 percent portland cement, water (if required), and the remainder clean Class 1 or 2 fine aggregate per section 9-03.1(2). The components shall be thoroughly mixed and then poured into the cracks and joints until full. The following day, any cracks or joints that are not completely filled shall be topped off with additional sand slurry. After the sand slurry is placed, the filler shall be struck off flush with the existing pavement surface and allowed to cure. The HMA overlay shall not be placed until the slurry has fully cured. The requirements of Section 1-06 will not apply to the portland cement and sand used in the sand slurry.

In areas where HMA will be placed, use sand slurry to fill the cracks.

In areas where HMA will not be placed, fill the cracks as follows:

1. Cracks ¼ inch to 1 inch in width - fill with hot poured sealant.
2. Cracks greater than 1 inch in width – fill with sand slurry.

Hot Poured Sealant: For cracks that are to be filled with hot poured sealant, apply the material in accordance with these requirements and the manufacturer's recommendations. Furnish a Type 1 Working Drawing of the manufacturer's product information and recommendations to the Engineer prior to the start of work, including the manufacturer's recommended heating time and temperatures, allowable storage time and temperatures after initial heating, allowable reheating criteria, and application temperature range. Confine hot poured sealant material within the crack. Clean any overflow of sealant from the pavement surface. If, in the opinion of the Engineer, the Contractor's method of sealing the cracks with hot poured sealant results in an excessive amount of material on the pavement surface, stop and correct the operation to eliminate the excess material.

5-04.3(4)A2 Crack Sealing Areas Prior to Paving

In areas where HMA will be placed, use sand slurry to fill the cracks.

5-04.3(4)A3 Crack Sealing Areas Not to be Paved

In areas where HMA will not be placed, fill the cracks as follows:

- A. Cracks ¼ inch to 1 inch in width - fill with hot poured sealant.
- B. Cracks greater than 1 inch in width – fill with sand slurry.

5-04.3(4)B Vacant

5-04.3(4)C Pavement Repair

The Contractor shall excavate pavement repair areas and shall backfill these with HMA in accordance with the details shown in the Plans and as marked in the field. The Contractor shall conduct the excavation operations in a manner that will protect the pavement that is to remain. Pavement not designated to be removed that is damaged as a result of the Contractor's operations shall be repaired by the Contractor to the satisfaction of the Engineer at no cost to the Contracting Agency. The Contractor shall excavate only within one lane at a time unless approved otherwise by the Engineer. The Contractor shall not excavate more area than can be completely finished during the same shift, unless approved by the Engineer.

Unless otherwise shown in the Plans or determined by the Engineer, excavate to a depth of 1.0 feet. The Engineer will make the final determination of the excavation depth required. The minimum width of any pavement repair area shall be 40 inches unless shown otherwise in the Plans. Before any excavation, the existing pavement shall be sawcut or shall be removed by a pavement grinder. Excavated materials will become the property of the Contractor and shall be disposed of in a Contractor-provided site off the Right of Way or used in accordance with Sections 2-02.3(3) or 9-03.21.

Asphalt for tack coat shall be required as specified in Section 5-04.3(4). A heavy application of tack coat shall be applied to all surfaces of existing pavement in the pavement repair area.

Placement of the HMA backfill shall be accomplished in lifts not to exceed 0.35-foot compacted depth. Lifts that exceed 0.35-foot of compacted depth may be accomplished with the approval of the Engineer. Each lift shall be thoroughly compacted by a mechanical tamper or a roller.

5-04.3(5) Producing/Stockpiling Aggregates and RAP

Aggregates and RAP shall be stockpiled according to the requirements of Section 3-02. Sufficient storage space shall be provided for each size of aggregate and RAP. Materials shall be removed from stockpile(s) in a manner to ensure minimal segregation when being moved to the HMA plant for processing into the final mixture. Different aggregate sizes shall be kept separated until they have been delivered to the HMA plant.

5-04.3(5)A Vacant

5-04.3(6) Mixing

After the required amount of mineral materials, asphalt binder, recycling agent and anti-stripping additives have been introduced into the mixer the HMA shall be mixed until complete and uniform coating of the particles and thorough distribution of the asphalt binder throughout the mineral materials is ensured.

When discharged, the temperature of the HMA shall not exceed the optimum mixing temperature by more than 25°F as shown on the reference mix design report or as approved by the Engineer. Also, when a WMA additive is included in the manufacture of HMA, the discharge temperature of the HMA shall not exceed the maximum recommended by the manufacturer of the WMA additive. A maximum water content of 2 percent in the mix, at discharge, will be allowed providing the water causes no problems with handling, stripping, or flushing. If the water in the HMA causes any of these problems, the moisture content shall be reduced as directed by the Engineer.

Storing or holding of the HMA in approved storage facilities will be permitted with approval of the Engineer, but in no event shall the HMA be held for more than 24 hours. HMA held for more than 24 hours after mixing shall be rejected. Rejected HMA shall be disposed of by the Contractor at no expense to the Contracting Agency. The storage facility shall have an accessible device located at the top of the cone or about the third point. The device shall indicate the amount of material in storage. No HMA shall be accepted from the storage facility when the HMA in storage is below the top of the cone of the storage facility, except as the storage facility is being emptied at the end of the working shift.

Recycled asphalt pavement (RAP) utilized in the production of HMA shall be sized prior to entering the mixer so that a uniform and thoroughly mixed HMA is produced. If there is evidence of the recycled asphalt pavement not breaking down during the heating and mixing of the HMA, the Contractor shall immediately suspend the use of the RAP until changes have been approved by the Engineer. After the required amount of mineral materials, RAP, new asphalt binder and asphalt rejuvenator have been introduced into the mixer the HMA shall be mixed until complete and uniform coating of the particles and thorough distribution of the asphalt binder throughout the mineral materials, and RAP is ensured.

5-04.3(7) Spreading and Finishing

The mixture shall be laid upon an approved surface, spread, and struck off to the grade and elevation established. HMA pavers complying with Section 5-04.3(3) shall be used to distribute the mixture. Unless otherwise directed by the Engineer, the nominal compacted depth of any layer of any course shall not exceed the following:

HMA Class 1"	0.35 feet
HMA Class $\frac{3}{4}$ " and HMA Class $\frac{1}{2}$ "	
wearing course	0.30 feet
other courses	0.35 feet
HMA Class $\frac{3}{8}$ "	0.15 <u>0.17</u> feet

On areas where irregularities or unavoidable obstacles make the use of mechanical spreading and finishing equipment impractical, the paving may be done with other equipment or by hand.

When more than one JMF is being utilized to produce HMA, the material produced for each JMF shall be placed by separate spreading and compacting equipment. The intermingling of HMA produced from more than one JMF is prohibited. Each strip of HMA placed during a work shift shall conform to a single JMF established for the class of HMA specified unless there is a need to make an adjustment in the JMF.

The internal temperature of the HMA mixture as measured immediately behind the paver screed should not be less than the minimum Compaction Temperature listed in the Mix Design Submittal Form or that listed in the WSDOT Mix Design Verification Report, whichever is greater.

All underground utilities testing shall be completed, and the installation of the underground utilities shall be accepted by the utility owner prior to placing HMA. All fill and crushed surfacing materials under the HMA pavement shall be placed, compacted and tested according to the Contract Documents prior to placing HMA. The HMA mixture shall be laid upon the prepared surface, spread, and struck off to the grade and elevation established.

The finish surface of the compacted HMA shall not deviate from the design grade in excess of the following:

Specified Depth	Max. Allowable Deviation At any point	Ave. Depth Deviation for entire project
Single lift 0.08 – 0.17'	-0.045'	-0.015'
Multi lift 0.00 – 0.25'	-0.03'	-0.01'
0.26 – 0.50'	-0.045'	-0.015'
0.51 – 0.75'	-0.06'	-0.02'
over 0.75'	-0.075'	-0.025'

5-04.3(8) Aggregate Acceptance Prior to Incorporation in HMA

For HMA accepted by nonstatistical evaluation the aggregate properties of sand equivalent, uncompacted void content and fracture will be evaluated in accordance with Section 3-04. Sampling and testing of aggregates for HMA accepted by commercial evaluation will be at the option of the Engineer.

5-04.3(9) HMA Mixture Acceptance

Acceptance of HMA shall be as provided under nonstatistical, or commercial evaluation.

Nonstatistical evaluation will be used for the acceptance of HMA unless Commercial Evaluation is specified.

Commercial evaluation will be used for Commercial HMA and for other classes of HMA in the following applications: sidewalks, road approaches, ditches, slopes, paths, trails, gores, prelevel, temporary pavement, and pavement repair. Other nonstructural applications of HMA accepted by commercial evaluation shall be as approved by the Engineer. Sampling and testing of HMA accepted by commercial evaluation will be at the option of the Engineer.

The mix design will be the initial JMF for the class of HMA. The Contractor may request a change in the JMF. Any adjustments to the JMF will require the approval of the Engineer and may be made in accordance with this section.

HMA Tolerances and Adjustments

- Job Mix Formula Tolerances** – The constituents of the mixture at the time of acceptance shall be within tolerance. The tolerance limits will be established as follows:

For Asphalt Binder and Air Voids (Va), the acceptance limits are determined by adding the tolerances below to the approved JMF values. These values will also be the Upper Specification Limit (USL) and Lower Specification Limit (LSL) required in Section 1-06.2(2)D2

Property	Non-Statistical Evaluation	Commercial Evaluation
Asphalt Binder	+/- 0.5%	+/- 0.7%
Air Voids, Va	2.5% min. and 5.5% max	N/A

For Aggregates in the mixture:

- a. First, determine preliminary upper and lower acceptance limits by applying the following tolerances to the approved JMF.

Aggregate Percent Passing	Non-Statistical Evaluation	Commercial Evaluation
1", ¾", ½", and 3/8" sieves	+/- 6%	+/- 8%
No. 4 sieve	+/- 6%	+/- 8%
No. 8 Sieve	+/- 6%	+/- 8%
No. 200 sieve	+/- 2.0%	+/- 3.0%

- b. Second, adjust the preliminary upper and lower acceptance limits determined from step (a) the minimum amount necessary so that none of the aggregate properties are outside the control points in Section 9-03.8(6). The resulting values will be the upper and lower acceptance limits for aggregates, as well as the USL and LSL required in Section 1-06.2(2)D2.
2. Job Mix Formula Adjustments – An adjustment to the aggregate gradation or asphalt binder content of the JMF requires approval of the Engineer. Adjustments to the JMF will only be considered if the change produces material of equal or better quality and may require the development of a new mix design if the adjustment exceeds the amounts listed below.
 - a. **Aggregates** –2 percent for the aggregate passing the 1½", 1", ¾", ½", ⅜", and the No. 4 sieves, 1 percent for aggregate passing the No. 8 sieve, and 0.5 percent for the aggregate passing the No. 200 sieve. The adjusted JMF shall be within the range of the control points in Section 9-03.8(6).
 - b. **Asphalt Binder Content** – The Engineer may order or approve changes to asphalt binder content. The maximum adjustment from the approved mix design for the asphalt binder content shall be 0.3 percent.

5-04.3(9)A Vacant

5-04.3(9)B Vacant

5-04.3(9)C Mixture Acceptance – Nonstatistical Evaluation

HMA mixture which is accepted by Nonstatistical Evaluation will be evaluated by the Contracting Agency by dividing the HMA tonnage into lots.

5-04.3(9)C1 Mixture Nonstatistical Evaluation – Lots and Sublots

A lot is represented by randomly selected samples of the same mix design that will be tested for acceptance. A lot is defined as the total quantity of material or work produced for each Job Mix Formula placed. Only one lot per JMF is expected. A subplot shall be equal to one day's production or 800 tons, whichever is less except that the final subplot will be a minimum of 400 tons and may be increased to 1200 tons.

All of the test results obtained from the acceptance samples from a given lot shall be evaluated collectively. If the Contractor requests a change to the JMF that is approved, the material produced after the change will be evaluated on the basis of the new JMF for the remaining sublots in the current lot and for acceptance of subsequent lots. For a lot in progress with a CPF less than 0.75, a new lot will begin at the Contractor's request after the Engineer is satisfied that material conforming to the Specifications can be produced.

Sampling and testing for evaluation shall be performed on the frequency of one sample per subplot.

Sampling and testing for total project quantities less than 400 tons is at the discretion of the engineer. For a total project quantity less than 800 tons but more than 400 tons, a minimum of one acceptance test shall be performed:

- i. If test results are found to be within specification requirements, additional testing will be at the Engineer's discretion.
- ii. If test results are found not to be within specification requirements, additional testing as needed to determine a CPF shall be performed.

5-04.3(9)C2 Mixture Nonstatistical Evaluation Sampling

Samples for acceptance testing shall be obtained by the Contractor when ordered by the Engineer. The Contractor shall sample the HMA mixture in the presence of the Engineer and in accordance with AASHTO T 168. A minimum of three samples should be taken for each class of HMA placed on a project. If used in a structural application, at least one of the three samples shall be tested.

Sampling and testing HMA in a Structural application where quantities are less than 400 tons is at the discretion of the Engineer.

For HMA used in a structural application and with a total project quantity less than 800 tons but more than 400 tons, a minimum of one acceptance test shall be performed. In all cases, a minimum of 3 samples will be obtained at the point of acceptance, a minimum of one of the three samples will be tested for conformance to the JMF:

- If the test results are found to be within specification requirements, additional testing will be at the Engineer's discretion.
- If test results are found not to be within specification requirements, additional testing of the remaining samples to determine a Composite Pay Factor (CPF) shall be performed.

5-04.3(9)C3 Mixture Nonstatistical Evaluation – Acceptance Testing

Testing of HMA for compliance of V_a will at the option of the Contracting Agency. If tested, compliance of V_a will use WSDOT SOP 731.

Testing for compliance of asphalt binder content will be by WSDOT FOP for AASHTO T 308.

Testing for compliance of gradation will be by FOP for WAQTC T 27/T 11.

5-04.3(9)C4 Mixture Nonstatistical Evaluation – Pay Factors

For each lot of material falling outside the tolerance limits in 5-04.3(9), the Contracting Agency will determine a Composite Pay Factor (CPF) using the following price adjustment factors:

Table of Price Adjustment Factors	
Constituent	Factor “f”
All aggregate passing: 1½", 1", ¾", ½", ⅜" and No.4 sieves	2
All aggregate passing No. 8 sieve	15
All aggregate passing No. 200 sieve	20
Asphalt binder	40
Air Voids (Va) (where applicable)	20

Each lot of HMA produced under Nonstatistical Evaluation and having all constituents falling within the tolerance limits of the job mix formula shall be accepted at the unit Contract price with no further evaluation. When one or more constituents fall outside the nonstatistical tolerance limits in the Job Mix Formula shown in Table of Price Adjustment Factors, the lot shall be evaluated in accordance with Section 1-06.2 to determine the appropriate CPF. The nonstatistical tolerance limits will be used in the calculation of the CPF and the maximum CPF shall be 1.00. When less than three sublots exist, backup samples of the existing sublots or samples from the Roadway shall be tested to provide a minimum of three sets of results for evaluation.

5-04.3(9)C5 Vacant**5-04.3(9)C6 Mixture Nonstatistical Evaluation – Price Adjustments**

For each lot of HMA mix produced under Nonstatistical Evaluation when the calculated CPF is less than 1.00, a Nonconforming Mix Factor (NCMF) will be determined. The NCMF equals the algebraic difference of CPF minus 1.00 multiplied by 60 percent. The total job mix compliance price adjustment will be calculated as the product of the NCMF, the quantity of HMA in the lot in tons, and the unit Contract price per ton of mix.

If a constituent is not measured in accordance with these Specifications, its individual pay factor will be considered 1.00 in calculating the Composite Pay Factor (CPF).

5-04.3(9)C7 Mixture Nonstatistical Evaluation - Retests

The Contractor may request a subplot be retested. To request a retest, the Contractor shall submit a written request within 7 calendar days after the specific test results have been received. A split of the original acceptance sample will be retested. The split of the sample will not be tested with the same tester that ran the original acceptance test. The sample will be tested for a complete gradation analysis, asphalt binder content, and, at the option of the agency, V_a . The results of the retest will be used for the acceptance of the HMA in place of the original subplot sample test results. The cost of testing will be

deducted from any monies due or that may come due the Contractor under the Contract at the rate of \$500 per sample.

5-04.3 (9)D Mixture Acceptance – Commercial Evaluation

If sampled and tested, HMA produced under Commercial Evaluation and having all constituents falling within the tolerance limits of the job mix formula shall be accepted at the unit Contract price with no further evaluation. When one or more constituents fall outside the commercial tolerance limits in the Job Mix Formula shown in 5-04.3(9), the lot shall be evaluated in accordance with Section 1-06.2 to determine the appropriate CPF. The commercial tolerance limits will be used in the calculation of the CPF and the maximum CPF shall be 1.00. When less than three sublots exist, backup samples of the existing sublots or samples from the street shall be tested to provide a minimum of three sets of results for evaluation.

For each lot of HMA mix produced and tested under Commercial Evaluation when the calculated CPF is less than 1.00, a Nonconforming Mix Factor (NCMF) will be determined. The NCMF equals the algebraic difference of CPF minus 1.00 multiplied by 60 percent. The Job Mix Compliance Price Adjustment will be calculated as the product of the NCMF, the quantity of HMA in the lot in tons, and the unit Contract price per ton of mix.

If a constituent is not measured in accordance with these Specifications, its individual pay factor will be considered 1.00 in calculating the Composite Pay Factor (CPF).

5-04.3(10) HMA Compaction Acceptance

HMA mixture accepted by nonstatistical evaluation that is used in traffic lanes, including lanes for intersections, ramps, truck climbing, weaving, and speed change, and having a specified compacted course thickness greater than 0.10-foot, shall be compacted to a specified level of relative density. The specified level of relative density shall be a Composite Pay Factor (CPF) of not less than 0.75 when evaluated in accordance with Section 1-06.2, using a LSL of 92.0 (minimum of 92 percent of the maximum density). The maximum density shall be determined by WSDOT FOP for AASHTO T 729. The specified level of density attained will be determined by the evaluation of the density of the pavement. The density of the pavement shall be determined in accordance with WSDOT FOP for WAQTC TM 8, except that gauge correlation will be at the discretion of the Engineer, when using the nuclear density gauge and WSDOT SOP 736 when using cores to determine density.

Tests for the determination of the pavement density will be taken in accordance with the required procedures for measurement by a nuclear density gauge or roadway cores after completion of the finish rolling.

If the Contracting Agency uses a nuclear density gauge to determine density the test procedures FOP for WAQTC TM 8 and WSDOT SOP T 729 will be used on the day the mix is placed and prior to opening to traffic.

Roadway cores for density may be obtained by either the Contracting Agency or the Contractor in accordance with WSDOT SOP 734. The core diameter shall be 4-inches minimum, unless otherwise approved by the Engineer. Roadway cores will be tested by the Contracting Agency in accordance with WSDOT FOP for AASHTO T 166.

If the Contract includes the Bid item "Roadway Core" the cores shall be obtained by the Contractor in the presence of the Engineer on the same day the mix is placed and at locations designated by the Engineer. If the Contract does not include the Bid item "Roadway Core" the Contracting Agency will obtain the cores.

For a lot in progress with a CPF less than 0.75, a new lot will begin at the Contractor's request after the Engineer is satisfied that material conforming to the Specifications can be produced.

HMA mixture accepted by commercial evaluation and HMA constructed under conditions other than those listed above shall be compacted on the basis of a test point evaluation of the compaction train. The test point evaluation shall be performed in accordance with instructions from the Engineer. The number of passes with an approved compaction train, required to attain the maximum test point density, shall be used on all subsequent paving.

HMA for preleveling shall be thoroughly compacted. HMA that is used for preleveling wheel rutting shall be compacted with a pneumatic tire roller unless otherwise approved by the Engineer.

Test Results

For a subplot that has been tested with a nuclear density gauge that did not meet the minimum of 92 percent of the reference maximum density in a compaction lot with a CPF below 1.00 and thus subject to a price reduction or rejection, the Contractor may request that a core be used for determination of the relative density of the subplot. The relative density of the core will replace the relative density determined by the nuclear density gauge for the subplot and will be used for calculation of the CPF and acceptance of HMA compaction lot.

When cores are taken by the Contracting Agency at the request of the Contractor, they shall be requested by noon of the next workday after the test results for the subplot have been provided or made available to the Contractor. Core locations shall be outside of wheel paths and as determined by the Engineer. Traffic control shall be provided by the Contractor as requested by the Engineer. Failure by the Contractor to provide the requested traffic control will result in forfeiture of the request for cores. When the CPF for the lot based on the results of the HMA cores is less than 1.00, the cost for the coring will be deducted from any monies due or that may become due the Contractor under the Contract at the rate of \$200 per core and the Contractor shall pay for the cost of the traffic control.

5-04.3(10)A HMA Compaction – General Compaction Requirements

Compaction shall take place when the mixture is in the proper condition so that no undue displacement, cracking, or shoving occurs. Areas inaccessible to large compaction equipment shall be compacted by other mechanical means. Any HMA that becomes loose, broken, contaminated, shows an excess or deficiency of asphalt, or is in any way defective, shall be removed and replaced with new hot mix that shall be immediately compacted to conform to the surrounding area.

Separate breakdown and finish rollers are required. The type of rollers to be used and their relative position in the compaction sequence shall generally be the Contractor's option, provided the specified densities are attained. Unless the Engineer has approved otherwise, rollers shall only be operated in the static mode when the internal temperature of the mix is less than 175°F. Regardless of mix temperature, a roller shall not be operated in a mode that results in checking or cracking of the mat. Rollers shall only

be operated in static mode on bridge decks. Approaches shall be compacted with vibratory plates or a small roller if determined necessary by the Engineer.

5-04.3(10)B HMA Compaction – Cyclic Density

Low cyclic density areas are defined as spots or streaks in the pavement that are less than 90 percent of the theoretical maximum density. At the Engineer's discretion, the Engineer may evaluate the HMA pavement for low cyclic density, and when doing so will follow WSDOT SOP 733. A \$500 Cyclic Density Price Adjustment will be assessed for any 500-foot section with two or more density readings below 90 percent of the theoretical maximum density.

5-04.3(10)C Vacant

5-04.3(10)D HMA Nonstatistical Compaction

5-04.3(10)D1 HMA Nonstatistical Compaction – Lots and Sublots

HMA compaction which is accepted by nonstatistical evaluation will be based on acceptance testing performed by the Contracting Agency dividing the project into compaction lots.

A lot is represented by randomly selected samples of the same mix design that will be tested for acceptance. A lot is defined as the total quantity of material or work produced for each Job Mix Formula placed. Only one lot per JMF is expected. A subplot shall be equal to one day's production or 400 tons, whichever is less except that the final subplot will be a minimum of 200 tons and may be increased to 800 tons. Testing for compaction will be at the rate of 5 tests per subplot per WSDOT T 738.

The subplot locations within each density lot will be determined by the Engineer. For a lot in progress with a CPF less than 0.75, a new lot will begin at the Contractor's request after the Engineer is satisfied that material conforming to the Specifications can be produced.

HMA mixture accepted by commercial evaluation and HMA constructed under conditions other than those listed above shall be compacted on the basis of a test point evaluation of the compaction train. The test point evaluation shall be performed in accordance with instructions from the Engineer. The number of passes with an approved compaction train, required to attain the maximum test point density, shall be used on all subsequent paving.

HMA for preleveling shall be thoroughly compacted. HMA that is used to prelevel wheel ruts shall be compacted with a pneumatic tire roller unless otherwise approved by the Engineer.

5-04.3(10)D2 HMA Compaction Nonstatistical Evaluation – Acceptance Testing

The location of the HMA compaction acceptance tests will be randomly selected by the Engineer from within each subplot, with one test per subplot.

5-04.3(10)D3 HMA Nonstatistical Compaction – Price Adjustments

For each compaction lot with one or two sublots, having all sublots attain a relative density that is 92 percent of the reference maximum density the HMA shall be accepted at the unit Contract price with no further evaluation. When a subplot does not attain a relative density that is 92 percent of the reference maximum density, the lot shall be evaluated in accordance with Section 1-06.2 to determine

the appropriate CPF. The maximum CPF shall be 1.00, however, lots with a calculated CPF in excess of 1.00 will be used to offset lots with CPF values below 1.00 but greater than 0.90. Lots with CPF lower than 0.90 will be evaluated for compliance per 5-04.3(11). Additional testing by either a nuclear moisture-density gauge or cores will be completed as required to provide a minimum of three tests for evaluation.

For compaction below the required 92% a Non-Conforming Compaction Factor (NCCF) will be determined. The NCCF equals the algebraic difference of CPF minus 1.00 multiplied by 40 percent. The Compaction Price Adjustment will be calculated as the product of CPF, the quantity of HMA in the compaction control lot in tons, and the unit Contract price per ton of mix.

5-04.3(11) Reject Work

5-04.3(11)A Reject Work General

Work that is defective or does not conform to Contract requirements shall be rejected. The Contractor may propose, in writing, alternatives to removal and replacement of rejected material. Acceptability of such alternative proposals will be determined at the sole discretion of the Engineer. HMA that has been rejected is subject to the requirements in Section 1-06.2(2) and this specification, and the Contractor shall submit a corrective action proposal to the Engineer for approval.

5-04.3(11)B Rejection by Contractor

The Contractor may, prior to sampling, elect to remove any defective material and replace it with new material. Any such new material will be sampled, tested, and evaluated for acceptance.

5-04.3(11)C Rejection Without Testing (Mixture or Compaction)

The Engineer may, without sampling, reject any batch, load, or section of Roadway that appears defective. Material rejected before placement shall not be incorporated into the pavement. Any rejected section of Roadway shall be removed.

No payment will be made for the rejected materials or the removal of the materials unless the Contractor requests that the rejected material be tested. If the Contractor elects to have the rejected material tested, a minimum of three representative samples will be obtained and tested. Acceptance of rejected material will be based on conformance with the nonstatistical acceptance Specification. If the CPF for the rejected material is less than 0.75, no payment will be made for the rejected material; in addition, the cost of sampling and testing shall be borne by the Contractor. If the CPF is greater than or equal to 0.75, the cost of sampling and testing will be borne by the Contracting Agency. If the material is rejected before placement and the CPF is greater than or equal to 0.75, compensation for the rejected material will be at a CPF of 0.75. If rejection occurs after placement and the CPF is greater than or equal to 0.75, compensation for the rejected material will be at the calculated CPF with an addition of 25 percent of the unit Contract price added for the cost of removal and disposal.

5-04.3(11)D Rejection - A Partial Sublot

In addition to the random acceptance sampling and testing, the Engineer may also isolate from a normal sublot any material that is suspected of being defective in relative density, gradation or asphalt binder content. Such isolated material will not include an original sample location. A minimum of three random

samples of the suspect material will be obtained and tested. The material will then be statistically evaluated as an independent lot in accordance with Section 1-06.2(2).

5-04.3(11)E Rejection - An Entire Sublot

An entire sublot that is suspected of being defective may be rejected. When a sublot is rejected a minimum of two additional random samples from this sublot will be obtained. These additional samples and the original sublot will be evaluated as an independent lot in accordance with Section 1-06.2(2).

5-04.3(11)F Rejection - A Lot in Progress

The Contractor shall shut down operations and shall not resume HMA placement until such time as the Engineer is satisfied that material conforming to the Specifications can be produced:

1. When the Composite Pay Factor (CPF) of a lot in progress drops below 1.00 and the Contractor is taking no corrective action, or
2. When the Pay Factor (PF) for any constituent of a lot in progress drops below 0.95 and the Contractor is taking no corrective action, or
3. When either the PF_i for any constituent or the CPF of a lot in progress is less than 0.75.

5-04.3(11)G Rejection - An Entire Lot (Mixture or Compaction)

An entire lot with a CPF of less than 0.75 will be rejected.

5-04.3(12) Joints

5-04.3(12)A HMA Joints

5-04.3(12)A1 Transverse Joints

The Contractor shall conduct operations such that the placing of the top or wearing course is a continuous operation or as close to continuous as possible. Unscheduled transverse joints will be allowed and the roller may pass over the unprotected end of the freshly laid mixture only when the placement of the course must be discontinued for such a length of time that the mixture will cool below compaction temperature. When the Work is resumed, the previously compacted mixture shall be cut back to produce a slightly beveled edge for the full thickness of the course.

A temporary wedge of HMA constructed on a 20H:1V shall be constructed where a transverse joint as a result of paving or planing is open to traffic. The HMA in the temporary wedge shall be separated from the permanent HMA by strips of heavy wrapping paper or other methods approved by the Engineer. The wrapping paper shall be removed and the joint trimmed to a slightly beveled edge for the full thickness of the course prior to resumption of paving.

The material that is cut away shall be wasted and new mix shall be laid against the cut. Rollers or tamping irons shall be used to seal the joint.

The HMA overlay shall be feathered to produce a smooth riding connection to the existing pavement.

HMA utilized in the construction of the feathered connections shall be modified by eliminating the coarse aggregate from the mix at the Contractor's plant or the commercial source or by raking the joint on the roadway, to the satisfaction of the Engineer.

5-04.3(12)A2 Longitudinal Joints

The longitudinal joint in any one course shall be offset from the course immediately below by not more than 6 inches nor less than 2 inches. All longitudinal joints constructed in the wearing course shall be located at a lane line or an edge line of the Traveled Way. A notched wedge joint shall be constructed along all longitudinal joints in the wearing surface of new HMA unless otherwise approved by the Engineer. The notched wedge joint shall have a vertical edge of not less than the maximum aggregate size or more than $\frac{1}{2}$ of the compacted lift thickness and then taper down on a slope not steeper than 4H:1V. The sloped portion of the HMA notched wedge joint shall be uniformly compacted.

5-04.3(12)B Bridge Paving Joint Seals

5-04.3(12)B1 HMA Sawcut and Seal

Prior to placing HMA on the bridge deck, establish sawcut alignment points at both ends of the bridge paving joint seals to be placed at the bridge ends, and at interior joints within the bridge deck when and where shown in the Plans. Establish the sawcut alignment points in a manner that they remain functional for use in aligning the sawcut after placing the overlay.

Submit a Type 1 Working Drawing consisting of the sealant manufacturer's application procedure.

Construct the bridge paving joint seal as specified on the Plans and in accordance with the detail shown in the Standard Plans. Construct the sawcut in accordance with the detail shown in the Standard Plan. Construct the sawcut in accordance with Section 5-05.3(8)B and the manufacturer's application procedure.

5-04.3(12)B2 Paved Panel Joint Seal

Construct the paved panel joint seal in accordance with the requirements specified in section 5-04.3(12)B1 and the following requirement:

1. Clean and seal the existing joint between concrete panels in accordance with Section 5-01.3(8) and the details shown in the Standard Plans.

5-04.3(13) Surface Smoothness

The completed surface of all courses shall be of uniform texture, smooth, uniform as to crown and grade, and free from defects of all kinds. The completed surface of the wearing course shall not vary more than $\frac{1}{8}$ inch from the lower edge of a 10-foot straightedge placed on the surface parallel to the centerline. The transverse slope of the completed surface of the wearing course shall vary not more than $\frac{1}{4}$ inch in 10 feet from the rate of transverse slope shown in the Plans.

When deviations in excess of the above tolerances are found that result from a high place in the HMA, the pavement surface shall be corrected by one of the following methods:

1. Removal of material from high places by grinding with an approved grinding machine, or
2. Removal and replacement of the wearing course of HMA, or
3. By other method approved by the Engineer.

Correction of defects shall be carried out until there are no deviations anywhere greater than the allowable tolerances.

Deviations in excess of the above tolerances that result from a low place in the HMA and deviations resulting from a high place where corrective action, in the opinion of the Engineer, will not produce satisfactory results will be accepted with a price adjustment. The Engineer shall deduct from monies due or that may become due to the Contractor the sum of \$500.00 for each and every section of single traffic lane 100 feet in length in which any excessive deviations described above are found.

When utility appurtenances such as manhole covers and valve boxes are located in the traveled way, the utility appurtenances shall be adjusted to the finished grade prior to paving. This requirement may be waived when requested by the Contractor, at the discretion of the Engineer or when the adjustment details provided in the project plan or specifications call for utility appurtenance adjustments after the completion of paving.

Utility appurtenance adjustment discussions will be included in the Pre-Paving planning (5-04.3(14)B3). Submit a written request to waive this requirement to the Engineer prior to the start of paving.

5-04.3(14) Planing (Milling) Bituminous Pavement

The planning plan must be approved by the Engineer and a pre planning meeting must be held prior to the start of any planing. See Section 5-04.3(14)B2 for information on planning submittals.

Locations of existing surfacing to be planed are as shown in the Drawings.

Where planing an existing pavement is specified in the Contract, the Contractor must remove existing surfacing material and to reshape the surface to remove irregularities. The finished product must be a prepared surface acceptable for receiving an HMA overlay.

Use the cold milling method for planing unless otherwise specified in the Contract. Do not use the planer on the final wearing course of new HMA.

Conduct planing operations in a manner that does not tear, break, burn, or otherwise damage the surface which is to remain. The finished planed surface must be slightly grooved or roughened and must be free from gouges, deep grooves, ridges, or other imperfections. The Contractor must repair any damage to the surface by the Contractor's planing equipment, using an Engineer approved method.

Repair or replace any metal castings and other surface improvements damaged by planing, as determined by the Engineer.

A tapered wedge cut must be planed longitudinally along curb lines sufficient to provide a minimum of 4 inches of curb reveal after placement and compaction of the final wearing course. The dimensions of the wedge must be as shown on the Drawings or as specified by the Engineer.

A tapered wedge cut must also be made at transitions to adjoining pavement surfaces (meet lines) where butt joints are shown on the Drawings. Cut butt joints in a straight line with vertical faces 2 inches or more in height, producing a smooth transition to the existing adjoining pavement.

After planing is complete, planed surfaces must be swept, cleaned, and if required by the Contract, patched and preleveled.

The Engineer may direct additional depth planing. Before performing this additional depth planing, the Contractor must conduct a hidden metal in pavement detection survey as specified in Section 5-04.3(14)A.

5-04.3(14)A Pre-Planing Metal Detection Check

Before starting planing of pavements, and before any additional depth planing required by the Engineer, the Contractor must conduct a physical survey of existing pavement to be planed with equipment that can identify hidden metal objects.

Should such metal be identified, promptly notify the Engineer.

See Section 1-07.16(1) regarding the protection of survey monumentation that may be hidden in pavement.

The Contractor is solely responsible for any damage to equipment resulting from the Contractor's failure to conduct a pre-planing metal detection survey, or from the Contractor's failure to notify the Engineer of any hidden metal that is detected.

5-04.3(14)B Paving and Planing Under Traffic

5-04.3(14)B1 General

In addition, the requirements of Section 1-07.23 and the traffic controls required in Section 1-10, and unless the Contract specifies otherwise or the Engineer approves, the Contractor must comply with the following:

1. Intersections:
 - a. Keep intersections open to traffic at all times, except when paving or planing operations through an intersection requires closure. Such closure must be kept to the minimum time required to place and compact the HMA mixture, or plane as appropriate. For paving, schedule such closure to individual lanes or portions thereof that allows the traffic volumes and schedule of traffic volumes required in the approved traffic control plan. Schedule work so that adjacent intersections are not impacted at the same time and comply with the traffic control restrictions required by the Traffic Engineer. Each individual intersection closure or partial closure, must be addressed in the traffic control plan, which must be submitted to and accepted by the Engineer, see Section 1-10.2(2).
 - b. When planing or paving and related construction must occur in an intersection, consider scheduling and sequencing such work into quarters of the intersection, or half or more of an intersection with side street detours. Be prepared to sequence the work to individual lanes or portions thereof.
 - c. Should closure of the intersection in its entirety be necessary, and no trolley service is impacted, keep such closure to the minimum time required to place and compact the HMA mixture, plane, remove asphalt, tack coat, and as needed.

- d. Any work in an intersection requires advance warning in both signage and a number of Working Days advance notice as determined by the Engineer, to alert traffic and emergency services of the intersection closure or partial closure.
 - e. Allow new compacted HMA asphalt to cool to ambient temperature before any traffic is allowed on it. Traffic is not allowed on newly placed asphalt until approval has been obtained from the Engineer.
2. Temporary centerline marking, post-paving temporary marking, temporary stop bars, and maintaining temporary pavement marking must comply with Section 8-23.
 3. Permanent pavement marking must comply with Section 8-22.

5-04.3(14)B2 Submittals – Planing Plan and HMA Paving Plan

The Contractor must submit a separate planing plan and a separate paving plan to the Engineer at least 5 Working Days in advance of each operation's activity start date. These plans must show how the moving operation and traffic control are coordinated, as they will be discussed at the pre-planing briefing and pre-paving briefing. When requested by the Engineer, the Contractor must provide each operation's traffic control plan on 24 x 36 inch or larger size Shop Drawings with a scale showing both the area of operation and sufficient detail of traffic beyond the area of operation where detour traffic may be required. The scale on the Shop Drawings is 1 inch = 20 feet, which may be changed if the Engineer agrees sufficient detail is shown.

The planing operation and the paving operation include, but are not limited to, metal detection, removal of asphalt and temporary asphalt of any kind, tack coat and drying, staging of supply trucks, paving trains, rolling, scheduling, and as may be discussed at the briefing.

When intersections will be partially or totally blocked, provide adequately sized and noticeable signage alerting traffic of closures to come, a minimum 2 Working Days in advance. The traffic control plan must show where police officers will be stationed when signalization is or may be, countermanded, and show areas where flaggers are proposed.

At a minimum, the planing and the paving plan must include:

1. A copy of the accepted traffic control plan, see Section 1-10.2(2), detailing each day's traffic control as it relates to the specific requirements of that day's planing and paving. Briefly describe the sequencing of traffic control consistent with the proposed planing and paving sequence, and scheduling of placement of temporary pavement markings and channelizing devices after each day's planing, and paving.
2. A copy of each intersection's traffic control plan.
3. Haul routes from Supplier facilities, and locations of temporary parking and staging areas, including return routes. Describe the complete round trip as it relates to the sequencing of paving operations.
4. Names and locations of HMA Supplier facilities to be used.
5. List of all equipment to be used for paving.
6. List of personnel and associated job classification assigned to each piece of paving equipment.
7. Description (geometric or narrative) of the scheduled sequence of planing and of paving, and intended area of planing and of paving for each day's work, must include the directions of proposed planing and of proposed paving, sequence of adjacent lane paving, sequence of

skipped lane paving, intersection planing and paving scheduling and sequencing, and proposed notifications and coordinations to be timely made. The plan must show HMA joints relative to the final pavement marking lane lines.

8. Names, job titles, and contact information for field, office, and plant supervisory personnel.
9. A copy of the approved Mix Designs.
10. Tonnage of HMA to be placed each day.
11. Approximate times and days for starting and ending daily operations.

5-04.3(14)B3 Pre-Paving and Pre-Planing Briefing

At least 2 Working Days before the first paving operation and the first planing operation, or as scheduled by the Engineer for future paving and planing operations to ensure the Contractor has adequately prepared for notifying and coordinating as required in the Contract, the Contractor must be prepared to discuss that day's operations as they relate to other entities and to public safety and convenience, including driveway and business access, garbage truck operations, Metro transit operations and working around energized overhead wires, school and nursing home and hospital and other accesses, other contractors who may be operating in the area, pedestrian and bicycle traffic, and emergency services. The Contractor, and Subcontractors that may be part of that day's operations, must meet with the Engineer and discuss the proposed operation as it relates to the submitted planing plan and paving plan, approved traffic control plan, and public convenience and safety. Such discussion includes, but is not limited to:

1. General for both Paving Plan and for Planing Plan:
 - a. The actual times of starting and ending daily operations.
 - b. In intersections, how to break up the intersection, and address traffic control and signalization for that operation, including use of peace officers.
 - c. The sequencing and scheduling of paving operations and of planing operations, as applicable, as it relates to traffic control, to public convenience and safety, and to other contractors who may operate in the Project Site.
 - d. Notifications required of Contractor activities, and coordinating with other entities and the public as necessary. This includes notification of the public of areas where parking will be prohibited during planing or paving operations, including any necessary "TEMPORARY NO PARKING" signs.
 - e. Description of the sequencing of installation and types of temporary pavement markings as it relates to planning and to paving.
 - f. Description of the sequencing of installation of, and the removal of, temporary pavement patch material around exposed castings and as may be needed
 - g. Description of procedures and equipment to identify hidden metal in the pavement, such as survey monumentation, monitoring wells, street car rail, and castings, before planning, see Section 5-04.3(14)B2.
 - h. Description of how flaggers will be coordinated with the planing, paving, and related operations.
 - i. Description of sequencing of traffic controls for the process of rigid pavement base repairs.
 - j. Other items the Engineer deems necessary to address.

2. Paving – additional topics:

- a. When to start applying tack and coordinating with paving.
- b. Types of equipment and numbers of each type equipment to be used. If more pieces of equipment than personnel are proposed, describe the sequencing of the personnel operating the types of equipment. Discuss the continuance of operator personnel for each type equipment as it relates to meeting Specification requirements.
- c. Number of JMFs to be placed, and if more than one JMF how the Contractor will ensure different JMFs are distinguished, how pavers and MTVs are distinguished if more than one JMF is being placed at the time, and how pavers and MTVs are cleaned so that one JMF does not adversely influence the other JMF.
- d. Description of contingency plans for that day's operations such as equipment breakdown, rain out, and Supplier shutdown of operations.
- e. Number of sublots to be placed, sequencing of density testing, and other sampling and testing.

5-04.3(15) Sealing Pavement Surfaces

Apply a fog seal where shown in the plans. Construct the fog seal in accordance with Section 5-02.3. Unless otherwise approved by the Engineer, apply the fog seal prior to opening to traffic.

5-04.3(16) HMA Road Approaches

HMA approaches shall be constructed at the locations shown in the Plans or where staked by the Engineer. The Work shall be performed in accordance with Section 5-04.

5-04.3(17) Protection of Monuments

Monuments that are within cases shall be adjusted as described in the Special Provisions for the bid item Adjusting Valve Boxes/Monument Cases. In areas where pavement planing will occur, the planing shall come to within 0.5 feet of the monument. If the monument has no case, it shall be protected and covered as necessary throughout the planing and paving operations. The new pavement shall match the grade of the existing pavement surface surrounding the monument.

In locations where pavement planing will not occur and survey monuments have no existing casing, the Contractor shall cover the monument with material that will protect the monument from damage. The Contractor shall pave over the protected monument, leaving a 3-inch diameter hole in the paving mat centered over the monument. After paving operations are complete, the Contractor shall coat the sides of the hole and underlying pavement with tack coat. No tack coat shall cover the monument itself.

5-04.4 Measurement

HMA Cl. ____ PG ____, HMA for ____ Cl. ____ PG ____, and Commercial HMA will be measured by the ton in accordance with Section 1-09.2, with no deduction being made for the weight of asphalt binder, mineral filler, or any other component of the mixture. If the Contractor elects to remove and replace mix as allowed by Section 5-04.3(11), the material removed will not be measured.

Roadway cores will be measured per each for the number of cores taken.

Preparation of untreated roadway will be measured by the mile once along the centerline of the main line Roadway. No additional measurement will be made for ramps, Auxiliary Lanes, service roads, Frontage Roads, or Shoulders. Measurement will be to the nearest 0.01 mile.

Soil residual herbicide will be measured by the mile for the stated width to the nearest 0.01 mile or by the square yard, whichever is designated in the Proposal.

Pavement repair excavation will be measured by the square yard of surface marked prior to excavation.

Asphalt for prime coat will be measured by the ton in accordance with Section 1-09.2.

Prime coat aggregate will be measured by the cubic yard, truck measure, or by the ton, whichever is designated in the Proposal.

Asphalt for fog seal will be measured by the ton, as provided in Section 5-02.4.

Longitudinal joint seals between the HMA and cement concrete pavement will be measured by the linear foot along the line and slope of the completed joint seal.

Planing bituminous pavement will be measured by the square yard.

Temporary pavement marking will be measured by the linear foot as provided in Section 8-23.4.

Water will be measured by the M gallon as provided in Section 2-07.4.

No specific unit of measurement will apply to the calculated item of asphalt cost price adjustment.

5-04.5 Payment

Payment will be made for each of the following Bid items that are included in the Proposal:

“HMA Cl. ____ PG ____”, per ton.

“HMA for Approach Cl. ____ PG ____”, per ton.

“HMA for Preleveling Cl. ____ PG ____”, per ton.

“HMA for Pavement Repair Cl. ____ PG ____”, per ton.

“Commercial HMA”, per ton.

The unit Contract price per ton for “HMA Cl. ____ PG ____”, “HMA for Approach Cl. ____ PG ____”, “HMA for Preleveling Cl. ____ PG ____”, “HMA for Pavement Repair Cl. ____ PG ____”, and “Commercial HMA” shall be full compensation for all costs, including anti-stripping additive, incurred to carry out the requirements of Section 5-04 except for those costs included in other items which are included in this Subsection and which are included in the Proposal. The cost of asphalt for tack coat, preparation of existing surfaces, protection of monuments, temporary striping and removal of existing buttons and all

other costs in connection with performing the work in accordance with these requirements shall be included in the unit cost for the HMA bid item of this contract.

“Preparation of Untreated Roadway”, per mile.

The unit Contract price per mile for “Preparation of Untreated Roadway” shall be full pay for all Work described under 5-04.3(4) , with the exception, however, that all costs involved in patching the Roadway prior to placement of HMA shall be included in the unit Contract price per ton for “HMA Cl. ____ PG ____” which was used for patching. If the Proposal does not include a Bid item for “Preparation of Untreated Roadway”, the Roadway shall be prepared as specified, but the Work shall be included in the Contract prices of the other items of Work.

“Preparation of Existing Paved Surfaces”, per mile.

The unit Contract Price for “Preparation of Existing Paved Surfaces” shall be full pay for all Work described under Section 5-04.3(4) with the exception, however, that all costs involved in patching the Roadway prior to placement of HMA shall be included in the unit Contract price per ton for “HMA Cl. ____ PG ____” which was used for patching. If the Proposal does not include a Bid item for “Preparation of Untreated Roadway”, the Roadway shall be prepared as specified, but the Work shall be included in the Contract prices of the other items of Work.

“Crack Sealing”, by force account.

“Crack Sealing” will be paid for by force account as specified in Section 1-09.6. For the purpose of providing a common Proposal for all Bidders, the Contracting Agency has entered an amount in the Proposal to become a part of the total Bid by the Contractor.

“Pavement Repair Excavation Incl. Haul”, per square yard.

The unit Contract price per square yard for “Pavement Repair Excavation Incl. Haul” shall be full payment for all costs incurred to perform the Work described in Section 5-04.3(4) with the exception, however, that all costs involved in the placement of HMA shall be included in the unit Contract price per ton for “HMA for Pavement Repair Cl. ____ PG ____”, per ton.

“Asphalt for Prime Coat”, per ton.

The unit Contract price per ton for “Asphalt for Prime Coat” shall be full payment for all costs incurred to obtain, provide and install the material in accordance with Section 5-04.3(4).

“Prime Coat Agg.”, per cubic yard, or per ton.

The unit Contract price per cubic yard or per ton for “Prime Coat Agg.” shall be full pay for furnishing, loading, and hauling aggregate to the place of deposit and spreading the aggregate in the quantities required by the Engineer.

“Asphalt for Fog Seal”, per ton.

Payment for "Asphalt for Fog Seal" is described in Section 5-02.5.

"Longitudinal Joint Seal", per linear foot.

The unit Contract price per linear foot for "Longitudinal Joint Seal" shall be full payment for all costs incurred to perform the Work described in Section 5-04.3(12).

"Planing Bituminous Pavement", per square yard.

The unit Contract price per square yard for "Planing Bituminous Pavement" shall be full payment for all costs incurred to perform the Work described in Section 5-04.3(14).

"Temporary Pavement Marking", per linear foot.

Payment for "Temporary Pavement Marking" is described in Section 8-23.5.

"Water", per M gallon.

Payment for "Water" is described in Section 2-07.5.

"Job Mix Compliance Price Adjustment", by calculation.

"Job Mix Compliance Price Adjustment" will be calculated and paid for as described in Section 5-04.3(9)C6.

"Compaction Price Adjustment", by calculation.

"Compaction Price Adjustment" will be calculated and paid for as described in Section 5-04..3(10)D3.

"Roadway Core", per each.

The Contractor's costs for all other Work associated with the coring (e.g., traffic control) shall be incidental and included within the unit Bid price per each and no additional payments will be made.

"Cyclic Density Price Adjustment", by calculation.

"Cyclic Density Price Adjustment" will be calculated and paid for as described in Section 5-04.3(10)B.

(January 13, 2021)

Asphalt Cost Price Adjustment

The Contracting Agency will make an Asphalt Cost Price Adjustment, either a credit or a payment, for qualifying changes in the reference cost of asphalt binder. The adjustment will be applied to partial payments made according to Section 1-09.9 for the following bid items when they are included in the

proposal:

“HMA Cl. ____ PG ____”

“HMA for Approach Cl. ____ PG ____”

“HMA for Preleveling Cl. ____ PG ____”

“HMA for Pavement Repair Cl. ____ PG ____”

“Commercial HMA”

The adjustment is not a guarantee of full compensation for changes in the cost of asphalt binder. The Contracting Agency does not guarantee that asphalt binder will be available at the reference cost.

The Contracting Agency will establish asphalt binder reference costs twice each month and post the information on the Agency website at: <https://wsdot.wa.gov/business-wsdot/contracts/about-public-works-contracts/payments-reporting/asphalt-binder-reference-cost>. The reference cost will be determined using posted prices furnished by Poten & Partners, Inc. If the selected price source ceases to be available for any reason, then the Contracting Agency will select a substitute price source to establish the reference cost.

Price adjustments will be calculated one time per month. No price adjustment will be made if the Current Reference Cost is within +/-5% of the Base Cost. Reference costs for projects located in Eastern versus Western Washington shall be selected from the column in the WSDOT website table labeled “Eastern”, or “Western”, accordingly. The adjustment will be calculated as follows:

If the reference cost is greater than or equal to 105% of the base cost, then Asphalt Cost Price Adjustment = (Current Reference Cost – (1.05 x Base Cost)) x (Q x 0.056).

If the reference cost is less than or equal to 95% of the base cost, then Asphalt Cost Price Adjustment = (Current Reference Cost – (0.95 x Base Cost)) x (Q x 0.056).

Where: Current Reference Cost is selected from the website table based on the “Date Effective” that immediately precedes the current month’s progress estimate end date. For work completed after all authorized working days are used, the adjustment will be based on the posted reference cost during which contract time was exhausted.

Base Cost is selected from the website table based on the “Date Effective” that immediately precedes the contract bid opening date, and shall be a constant for all monthly adjustments.

Q = total tons of all classes of HMA paid in the current month’s progress payment.

“Asphalt Cost Price Adjustment”, by calculation.

“Asphalt Cost Price Adjustment” will be calculated and paid for as described in this section. For the purpose of providing a common proposal for all bidders, the Contracting Agency has entered an amount in the proposal to become a part of the total bid by the Contractor.

BID ITEMS 12, 20 AND 27: ADJUSTING MANHOLES

BID ITEMS 13 AND 21: ADJUSTING VALVE BOXES/MONUMENT CASES

These bid items shall be accomplished in accordance with the Plans and Standard Specifications and the following Special Provision incorporated in this Contract as Section 7-20.

7-20 ADJUSTING VALVE BOXES, MONUMENT CASES AND MANHOLES

7-20.1 Description

This work consists of adjusting tops of manholes, boxes, and other similar structures.

Definitions:

Adjustments – To raise, lower, or reconstruct structures to a new top elevation flush with the surrounding surface.

Boxes – Valve boxes, meter boxes, monument boxes and other similar structures, with a cylindrical or rectangular body and removable cover for protection of and access to valves, meter, monuments, markers, etc.

Manholes – Manholes, sumps and similar structures designed to permit entry and working space usually at intersections of sewer pipes and storm drains.

Manhole Necks – That upper portion of a manhole having vertical walls and a uniform diameter or dimension just sufficient to receive and support the metal frame.

7-20.2 Materials

Materials used to adjust structures shall be either existing materials in a condition suitable for reuse, as determined by the engineer, or new materials that meet Section 7-05.2.

High Early Strength Concrete – High early strength concrete shall conform to the requirements of commercial concrete except it shall contain a minimum 705 pounds (7.5 sacks) of Type III or Type IIIA cement or an approved Type C or Type E admixture with a minimum 592 pounds (6.3 sacks) of Type I or Type II cement.

7-20.3 Construction

Excavate and backfill according to Section 2-09. Remove and dispose of old concrete and other materials according to Section 2-03.3(7)C.

Obtain approval before reusing salvaged metal frames, covers, grates and fittings on structures to be adjusted.

When concrete is poured around frames, paint the portion of the frame that will contact the concrete with hot asphalt before the concrete is poured.

Provide high early strength concrete, when shown on the plans or when traffic is required to traverse the structure due to staging requirements. The Engineer will determine the length of curing time.

Construct all cement concrete per the following:

Concrete approaches shall be constructed at the locations shown in the Plans or as designated by the Engineer and in accordance with the contract documents.

Approach concrete can be standard Portland cement concrete pavement or Class 4000 conforming to the requirements of Section 6-02. Approach concrete may be placed, compacted, and finished using hand methods. The tools required for these operations shall be approved by the Engineer.

Curing of approach concrete shall be in accordance with Section 5-05.3(13).

Concrete approaches may be opened to traffic in accordance with Section 5-05.3(17).

New construction shall conform to Section 7-05.

Repair, replace, or restore to existing condition, any sump backfill, inlet base drains, aggregate bases, and pavements disturbed or fouled by the adjustment work as directed.

7-20.3(1) Raising Manholes

After the existing frames, covers and grates have been removed, chip away the exposed top surface of concrete to a depth of at least ¼-inch to expose firm concrete. Clean the new surface by brushing and moisten with water at the time of placing new concrete. For manholes and sumps, place new concrete to the required grade and cure at least 3 days when using ordinary concrete, or as directed when using high early strength concrete. Then seat the frame in fresh mortar to proper grade.

Raise the tops of masonry structures with commercial concrete as per Section 6-02.3(2)B.

Limitations:

Manhole Necks, Domes, and Cones – Manhole necks may be adjusted with rings provided the distance from the new top elevation of the metal cover to the bottom of the neck is not more than 2 feet. If this dimension exceeds 2 feet, then remove the dome or cone, in part or in whole, and reconstruct or modify to provide a batter slope that does not exceed 6 inches horizontal per 12 inches vertical.

Mortar and Concrete Thickness – Do not place mortar more than 2 inches thick. Do not place concrete less than 3-1/2 inches thick. If necessary, cut down the existing shells or walls of structures to provide clearance for the new construction.

Metal Rings and Plates – Fabricated metal rings and plates may be furnished and used in the adjustment work, provided:

The metal and its fabrication design are at least equal to the strength and support required for covers or grates.

That uniform bearing of bearing surfaces is assured.

Positive safeguards are made against displacement when in service.

7-20.3(2) Precast Concrete Structures

Precast structures may be raised by using precast sections or concrete rings provided:

- The material conforms to the general requirements of the existing structures.
- Sections and rings are set and jointed to each other and to existing sections.
- That uniform bearing of bearing surfaces is assured.
- Positive safe guards are made against displacement when in service.

7-20.3(3) Adjusting Boxes and Similar Structures

Raise or lower boxes, and other similar structures to grade by:

- a. Installation of adjustment rings.
- b. Adding extensions of like material below the original structure if raising the structure to a point where it would not enclose or protect its contents.
- c. Placing precast concrete box extensions, or on cast-in-place concrete.

7-20.3(4) Finished Grade

Center a 10-foot straightedge, as far as practical, over the center of the cover of manholes and boxes. The final grade of the pavement surface and adjusted manholes and boxes shall not vary more than 1/8 inch from the finish grade and cross section at any point along the straightedge.

7-20.3(5) Survey Monuments without Existing Casing

In locations where survey monuments have no existing casing, the Contractor shall cover the monument with material that will protect the monument from damage. The Contractor shall pave over the protected monument, leaving a 3-inch diameter hole in the paving mat centered over the monument. After paving operations are complete, the Contractor shall coat the sides of the hole and underlying pavement with tack coat. No tack coat shall cover the monument itself.

7-20.4 Measurement

The quantities of adjusted manholes and boxes, and other similar structures shall be measured on a unit basis, per each by actual count. Protection of survey monuments with no existing casing shall not be measured for payment, because this work is incidental to other items of work.

7-20.5 Payment

The accepted quantities shall be paid for at the contract unit price per each for the following bid items that are included in the proposal:

“Adjusting Manholes”, per each.

“Adjusting Valve Boxes/Monument Cases”, per each.

Adjusting Manholes applies to manholes adjusted by raising or lowering the manhole neck.

Payment shall be payment in full for furnishing and placing all materials including all equipment, tools, labor, and appurtenances necessary to complete the work as specified.

Earthwork, backfill, protective coating, replacement of sump backfill, base drains, aggregate bases, pavements, concrete, and other miscellaneous work shall be included in the unit cost for each item. No separate measurement or payment will apply.

No payment will be made for protection of survey monuments with no existing casing because this work is included in the HMA bid items.

(January 9, 2023)

Standard Plans

The State of Washington Standard Plans for Road, Bridge and Municipal Construction M21-01, effective September 30, 2022, is made a part of this contract.

The Standard Plans are revised as follows:

A-10.30

RISER RING detail (Including SECTION view and RISER RING DIMENSIONS table): The RISER RING detail is deleted from the plan.

INSTALLATION detail, SECTION A: The "1/4" callout is revised to read "+/- 1/4" (SEE CONTRACT ~ Note: The + 1/4" installation is shown in the Section A view)"

B-90.40

Valve Detail – DELETED

C-8

DELETED

C-8A

DELETED

C-20.42

Plan View (Case 22A-31), callout, was; "BEAM GUARDRAIL ANCHOR TYPE 10 PAY LIMIT" is revised to read; "BEAM GUARDRAIL ANCHOR TYPE 11 PAY LIMIT"

C-23.60

DELETED

C-23.70

Sheet 1, Detail A, callout, was – "EIGHT 5/8" x 1/2" (IN) BOLTS W/ HEX NUTS AND WASHERS (SEE NOTE 5)" is revised to read: "EIGHT 5/8" x 1-1/2" (IN) BOLTS W/ HEX NUTS AND WASHERS (SEE NOTE 5)".

Sheet 2, ANCHOR RAIL ELEMENT DETAIL and associated Enlarged Detail, 3/4" Diameter hole pattern (8 holes), callout, "3/4" DIAMETER HOLE (TYP.)" is revised to read: "29/32" x 1 1/8" (IN) SLOT (TYP.)"

D-2.04
DELETED

D-2.06
DELETED

D-2.08
DELETED

D-2.32
DELETED

D-2.34
DELETED

D-2.60
DELETED

D-2.62
DELETED

D-2.64
DELETED

D-2.66
DELETED

D-2.68
DELETED

D-2.80
DELETED

D-2.88
DELETED

D-3.15
DELETED

D-3.16
DELETED

D-3.17
DELETED

D-3.10

Sheet 1, Typical Section, callout – “FOR WALLS WITH SINGLE SLOPE TRAFFIC BARRIER. USE THE DETAILS ABOVE THE MATCH LINE ON STANDARD PLAN D-3.15” is revised to read; “FOR WALLS WITH SINGLE SLOPE TRAFFIC BARRIER, SEE CONTRACT PLANS”

Sheet 1, Typical Section, callout – “FOR WALLS WITH F-SHAPE TRAFFIC BARRIER. USE THE DETAILS ABOVE THE MATCH LINE ON STANDARD PLAN D-3.16” is revised to read; “FOR WALLS WITH F-SHAPE TRAFFIC BARRIER, SEE CONTRACT PLANS”

D-3.11

Sheet 1, Typical Section, callout – ““B” BRIDGE APPROACH SLAB (SEE BRIDGE PLANS) OR PERMANENT GEOSYNTHETIC WALL BARRIER ~ SEE STANDARD PLANS D-3.15 OR D-3.16” is revised to read; “B” BRIDGE APPROACH SLAB OR MOMENT SLAB (SEE CONTRACT PLANS)

Sheet 1, Typical Section, callout – “TYPICAL BARRIER ON BRIDGE APPROACH SLAB (SEE BRIDGE PLANS) OR PERMANENT GEOSYNTHETIC WALL BARRIER ~ SEE STANDARD PLANS D-3.15 OR D-3.16” is revised to read; “TYPICAL BARRIER ON BRIDGE APPROACH SLAB OR MOMENT SLAB (SEE CONTRACT PLANS)

D-10.10

Wall Type 1 may be used if no traffic barrier is attached on top of the wall. Walls with traffic barriers attached on top of the wall are considered non-standard and shall be designed in accordance with the current WSDOT Bridge Design Manual (BDM) and the revisions stated in the 11/3/15 Bridge Design memorandum.

D-10.15

Wall Type 2 may be used if no traffic barrier is attached on top of the wall. Walls with traffic barriers attached on top of the wall are considered non-standard and shall be designed in accordance with the current WSDOT BDM and the revisions stated in the 11/3/15 Bridge Design memorandum.

D-10.30

Wall Type 5 may be used in all cases.

D-10.35

Wall Type 6 may be used in all cases.

D-10.40

Wall Type 7 may be used if no traffic barrier is attached on top of the wall. Walls with traffic barriers attached on top of the wall are considered non-standard and shall be designed in accordance with the current WSDOT BDM and the revisions stated in the 11/3/15 Bridge Design memorandum.

D-10.45

Wall Type 8 may be used if no traffic barrier is attached on top of the wall. Walls with traffic barriers attached on top of the wall are considered non-standard and shall be designed in accordance with the current WSDOT BDM and the revisions stated in the revisions stated in the 11/3/15 Bridge Design memorandum.

D-15.10

STD Plans D-15 series “Traffic Barrier Details for Reinforced Concrete Retaining Walls” are withdrawn. Special designs in accordance with the current WSDOT BDM are required in place of these STD Plans.

D-15.20

STD Plans D-15 series “Traffic Barrier Details for Reinforced Concrete Retaining Walls” are withdrawn. Special designs in accordance with the current WSDOT BDM are required in place of these STD Plans.

D-15.30

STD Plans D-15 series “Traffic Barrier Details for Reinforced Concrete Retaining Walls” are withdrawn. Special designs in accordance with the current WSDOT BDM are required in place of these STD Plans.

F-10.18

Note 2, “Region Traffic engineer approval is needed to install a truck apron lower than 3’.” - DELETED

J-10.10

Sheet 4 of 6, “Foundation Size Reference Table”, PAD WIDTH column, Type 33xD=6’ – 3” is revised to read: 7’ – 3”. Type 342LX / NEMA P44=5’ – 10” is revised to read: 6’ – 10”

Sheet 5 of 6, Plan View, “FOR EXAMPLE PAD SHOWN HERE:, “first bullet” item, “-SPACE BETWEEN TYPE B MOD. CABINET AND 33x CABINET IS 6” (IN)” IS REVISED TO READ: “SPACE BETWEEN TYPE B MOD. CABINET (BACK OF ALL CHANNEL STEEL) AND 33x CABINET IS 6” (IN) (CHANNEL STEEL ADDS ABOUT 5” (IN)”

J-10.16

Key Note 1, Standard Plan J-10.30 revised to Standard Plan J-10.14

J-10.17

Key Note 1, Standard Plan J-10.30 revised to Standard Plan J-10.14

J-10.18

Key Note 1, Standard Plan J-10.30 revised to Standard Plan J-10.14

J-20.10

Elevation View, horizontal dimension to edge of sidewalk 10” (IN) OR LESS DESIRABLE ~ 18” (IN) MAXIMUM is revised to read: “10” (IN) MAXIMUM”

J-20.26

Add Note 1, “1. One accessible pedestrian pushbutton station per pedestrian pushbutton post.”

J-20.16

View A, callout, was – LOCK NIPPLE, is revised to read; CHASE NIPPLE

J-21.10

Sheet 1, Elevation View, Round Concrete Foundation Detail, callout – “ANCHOR BOLTS ~ ¾” (IN) x 30” (IN) FULL THREAD ~ THREE REQ’D. PER ASSEMBLY” IS REVISED TO READ: “ANCHOR BOLTS ~ ¾” (IN) x 30” (IN) FULL THREAD ~ FOUR REQ’D. PER ASSEMBLY”

Sheet 1 of 2, Elevation view (Round), add dimension depicting the distance from the top of the foundation to find 2 #4 reinforcing bar shown, to read; 3" CLR.. Delete "(TYP.)" from the 2 ½" CLR. dimension, depicting the distance from the bottom of the foundation to find 2 # 4 reinf. Bar.

Sheet 1 of 2, Elevation view (Square), add dimension depicting the distance from the top of the foundation to find 1 #4 reinforcing bar shown, to read; 3" CLR. Delete "(TYP.)" from the 2 ½" CLR. dimension, depicting the distance from the bottom of the foundation to find 1 # 4 reinf. Bar.

Sheet 2 of 2, Elevation view (Round), add dimension depicting the distance from the top of the foundation to find 2 #4 reinforcing bar shown, to read; 3" CLR. Delete "(TYP.)" from the 2 ½" CLR. dimension, depicting the distance from the bottom of the foundation to find 2 # 4 reinf. Bar.

Sheet 2 of 2, Elevation view (Square), add dimension depicting the distance from the top of the foundation to find 1 #4 reinforcing bar shown, to read; 3" CLR. Delete "(TYP.)" from the 2 ½" CLR. dimension, depicting the distance from the bottom of the foundation to find 1 # 4 reinf. Bar.

Detail F, callout, "Heavy Hex Clamping Bolt (TYP.) ~ 3/4" (IN) Diam. Torque Clamping Bolts (see Note 3)" is revised to read; "Heavy Hex Clamping Bolt (TYP.) ~ 3/4" (IN) Diam. Torque Clamping Bolts (see Note 1)"

Detail F, callout, "3/4" (IN) x 2' – 6" Anchor Bolt (TYP.) ~ Four Required (See Note 4)" is revised to read; "3/4" (IN) x 2' – 6" Anchor Bolt (TYP.) ~ Three Required (See Note 2)"

J-21.15

Partial View, callout, was – LOCK NIPPLE ~ 1 ½" DIAM., is revised to read; CHASE NIPPLE ~ 1 ½" (IN) DIAM.

J-21.16

Detail A, callout, was – LOCKNIPPLE, is revised to read; CHASE NIPPLE

J-22.15

Ramp Meter Signal Standard, elevation, dimension 4' - 6" is revised to read; 6'-0"

(2x) Detail A, callout, was – LOCK NIPPLE ~ 1 ½" DIAM. is revised to read; CHASE NIPPLE ~ 1 ½" (IN) DIAM.

J-40.10

Sheet 2 of 2, Detail F, callout, "12 – 13 x 1 ½" S.S. PENTA HEAD BOLT AND 12" S. S. FLAT WASHER" is revised to read; "12 – 13 x 1 ½" S.S. PENTA HEAD BOLT AND 1/2" (IN) S. S. FLAT WASHER"

J-40.36

Note 1, second sentence; "Finish shall be # 2B for backbox and # 4 for the cover." Is revised to read; "Finish shall be # 2B for barrier box and HRAP (Hot Rolled Annealed and Pickled) for the cover.

J-40.37

Note 1, second sentence; "Finish shall be # 2B for backbox and # 4 for the cover." Is revised to read; "Finish shall be # 2B for barrier box and HRAP (Hot Rolled Annealed and Pickled) for the cover.

J-75.20

Key Notes, note 16, second bullet point, was: "1/2" (IN) x 0.45" (IN) Stainless Steel Bands", add the following to the end of the note: "Alternate: Stainless steel cable with stainless steel ends, nuts, bolts, and washers may be used in place of stainless steel bands and associated hardware."

J-75.41

DELETED

J-75.55

Notes, Note A1, Revise reference, was – G-90.29, should be – G-90.20.

K-80.20

DELETED

L-5.10

Sheet 2, Typical Elevation, callout - “2’ – 0” MIN. LAP SPLICE BETWEEN (mark) A #3 BAR AND WALL REINFORCEMENT ~ TYPICAL” is revised to read: “2’ – 0” MIN. LAP SPLICE BETWEEN (MARK) A #4 BAR AND WALL REINFORCEMENT ~ TYPICAL”

Section C, callout; “(mark) A #3” is revised to read: “(mark) A #4”, callout - “(mark) B #3” is revised to read: “(mark) B #4”, callout - “(mark) C #3 TIE” is revised to read: “(mark) C #4 TIE”

Reinforcing Steel Bending Diagram, (mark) B detail, callout – “128 deg.” is revised to read: “123 deg.”, callout – “51 deg.” is revised to read: “57 deg.”

The following are the Standard Plan numbers applicable at the time this project was advertised. The date shown with each plan number is the publication approval date shown in the lower right-hand corner of that plan. Standard Plans showing different dates shall not be used in this contract.

A-10.10-00.....8/7/07	A-30.35-00.....10/12/07	A-50.10-01.....8/17/21
A-10.20-00.....10/5/07	A-40.00-01.....7/6/22	A-50.40-01.....8/17/21
A-10.30-00.....10/5/07	A-40.10-04.....7/31/19	A-60.10-03.....12/23/14
A-20.10-00.....8/31/07	A-40.15-00.....8/11/09	A-60.20-03.....12/23/14
A-30.10-00.....11/8/07	A-40.20-04.....1/18/17	A-60.30-01.....6/28/18
A-30.30-01.....6/16/11	A-40.50-02.....12/23/14	A-60.40-00.....8/31/07
B-5.20-03.....9/9/20	B-30.50-03.....2/27/18	B-75.20-03.....8/17/21
B-5.40-02.....1/26/17	B-30.60-00.....9/9/20	B-75.50-02.....3/15/22
B-5.60-02.....1/26/17	B-30.70-04.....2/27/18	B-75.60-00.....6/8/06
B-10.20-02.....3/2/18	B-30.80-01.....2/27/18	B-80.20-00.....6/8/06
B-10.40-02.....8/17/21	B-30.90-02.....1/26/17	B-80.40-00.....6/1/06
B-10.70-02.....8/17/21	B-35.20-00.....6/8/06	B-85.10-01.....6/10/08
B-15.20-01.....2/7/12	B-35.40-00.....6/8/06	B-85.20-00.....6/1/06
B-15.40-01.....2/7/12	B-40.20-00.....6/1/06	B-85.30-00.....6/1/06
B-15.60-02.....1/26/17	B-40.40-02.....1/26/17	B-85.40-00.....6/8/06
B-20.20-02.....3/16/12	B-45.20-01.....7/11/17	B-85.50-01.....6/10/08
B-20.40-04.....2/27/18	B-45.40-01.....7/21/17	B-90.10-00.....6/8/06
B-20.60-03.....3/15/12	B-50.20-00.....6/1/06	B-90.20-00.....6/8/06
B-25.20-02.....2/27/18	B-55.20-03.....8/17/21	B-90.30-00.....6/8/06
B-25.60-02.....2/27/18	B-60.20-02.....9/9/20	B-90.40-01.....1/26/17
B-30.05-00.....9/9/20	B-60.40-01.....2/27/18	B-90.50-00.....6/8/06
B-30.10-03.....2/27/18	B-65.20-01.....4/26/12	B-95.20-02.....8/17/21
B-30.15-00.....2/27/18	B-65.40-00.....6/1/06	B-95.40-01.....6/28/18

B-30.20-04.....2/27/18	B-70.20-01.....3/15/22	
B-30.30-03.....2/27/18	B-70.60-01.....1/26/17	
B-30.40-03.....2/27/18		
C-1.....9/8/22	C-22.40-09.....9/8/22	C-60.70-01.....9/8/22
C-1b.....9/8/22	C-22.45-06.....9/8/22	C-60.80-01.....9/8/22
C-1d.....10/31/03	C-23.70-00.....8/22/22	C-70.15-00.....8/17/21
C-2c.....8/12/19	C-24.10-03.....7/24/22	C-70.10-03.....8/20/21
C-4f.....8/12/19	C-24.15-00.....3/15/22	C-75.10-02.....9/16/20
C-6a.....9/8/22	C-25.20-07.....8/20/21	C-75.20-03.....8/20/21
C-7.....9/8/22	C-25.22-06.....8/20/21	C-75.30-03.....8/20/21
C-7a.....9/8/22	C-25.26-05.....8/20/21	C-80.10-02.....9/16/20
C-20.10-08.....9/8/22	C-25.30-01.....8/20/21	C-80.20-01.....6/11/14
C-20.14-05.....9/8/22	C-25.80-05.....8/12/19	C-80.30-02.....8/20/21
C-20.15-02.....6/11/14	C-60.10-02.....9/8/22	C-80.40-01.....6/11/14
C-20.18-04.....9/8/22	C-60.15-00.....8/17/21	C-85.10-00.....4/8/12
C-20.40-09.....9/8/22	C-60.20-01.....9/8/22	C-85.11-01.....9/16/20
C-20.41-04.....8/22/22	C-60.30-01.....8/17/21	C-85.15-02.....8/27/21
C-20.42-05.....7/14/15	C-60.40-00.....8/17/21	C-85-18-03.....9/8/22
C-20.43-00.....8/22/22	C-60.45-00.....8/17/21	
C-20.45.03.....9/8/22	C-60.50-00.....8/17/21	
C-22.16-07.....9/16/20	C-60.60-00.....8/17/21	
D-2.36-03.....6/11/14	D-4.....12/11/98	D-10.35-00.....7/8/08
D-2.46-02.....8/13/21	D-6.....6/19/98	D-10.40-01.....12/2/08
D-2.84-00.....11/10/05	D-10.10-01.....12/2/08	D-10.45-01.....12/2/08
D-2.92-01.....4/26/22	D-10.15-01.....12/2/08	
D-3.09-00.....5/17/12	D-10.20-01.....8/7/19	
D-3.10-01.....5/29/13	D-10.25-01.....8/7/19	
D-3.11-03.....6/11/14	D-10.30-00.....7/8/08	
E-1.....2/21/07	E-4.....8/27/03	
E-2.....5/29/98	E-4a.....8/27/03	
F-10.12-04.....9/24/20	F-10.62-02.....4/22/14	F-40.15-04.....9/25/20
F-10.16-00.....12/20/06	F-10.64-03.....4/22/14	F-40.16-03.....6/29/16
F-10.18-03.....3/28/22	F-30.10-04.....9/25/20	F-45.10-03.....8/13/21
F-10.40-04.....9/24/20	F-40.12-03.....6/29/16	F-80.10-04.....7/15/16
F-10.42-00.....1/23/07	F-40.14-03.....6/29/16	
G-10.10-00.....9/20/07	G-26.10-00.....7/31/19	
G-20.10-03.....8/20/21	G-30.10-04.....6/23/15	
G-22.10-04.....6/28/18	G-50.10-03.....6/28/18	
G-24.10-00.....11/8/07	G-90.10-03.....7/11/17	
G-24.20-01.....2/7/12	G-90.20-05.....7/11/17	
G-24.30-02.....6/28/18	G-90.30-04.....7/11/17	

G-24.40-07.....6/28/18	G-95.10-02.....6/28/18	
G-24.50-05.....8/7/19	G-95.20-03.....6/28/18	
G-24.60-05.....6/28/18	G-95.30-03.....6/28/18	
G-25.10-05.....9/16/20		
H-10.10-00.....7/3/08	H-32.10-00.....9/20/07	H-70.10-02.....8/17/21
H-10.15-00.....7/3/08	H-60.10-01.....7/3/08	H-70.20-02.....8/17/21
H-30.10-00.....10/12/07	H-60.20-01.....7/3/08	
I-10.10-01.....8/11/09	I-30.20-00.....9/20/07	I-40.20-00.....9/20/07
I-30.10-02.....3/22/13	I-30.30-02.....6/12/19	I-50.20-02.....7/6/22
I-30.15-02.....3/22/13	I-30.40-02.....6/12/19	I-60.10-01.....6/10/13
I-30.16-01.....7/11/19	I-30.60-02.....6/12/19	I-60.20-01.....6/10/13
I-30.17-01.....6/12/19	I-40.10-00.....9/20/07	I-80.10-02.....7/15/16
J-05.50-00.....8/30/22	J-28.10-02.....8/7/19	J-50.25-00.....6/3/11
J-10.....7/18/97	J-28.22-00.....8/07/07	J-50.30-00.....6/3/11
J-10.10-04.....9/16/20	J-28.24-02.....9/16/20	J-60.05-01.....7/21/16
J-10.12-00.....9/16/20	J-28.26-01.....12/02/08	J-60.11-00.....5/20/13
J-10.14-00.....9/16/20	J-28.30-03.....6/11/14	J-60.12-00.....5/20/13
J-10.15-01.....6/11/14	J-28.40-02.....6/11/14	J-60.13-00.....6/16/10
J-10.16-02.....8/18/21	J-28.42-01.....6/11/14	J-60.14-01.....7/31/19
J-10.17-02.....8/18/21	J-28.43-01.....6/28/18	J-75.10-02.....7/10/15
J-10.18-02.....8/18/21	J-28.45-03.....7/21/16	J-75.20-01.....7/10/15
J-10.20-04.....8/18/21	J-28.50-03.....7/21/16	J-75.30-02.....7/10/15
J-10.21-02.....8/18/21	J-28.60-03.....8/27/21	J-75.50-00.....8/30/22
J-10.22-02.....8/18/21	J-28.70-04.....8/30/22	J-75.55-00.....8/30/22
J-10.25-00.....7/11/17	J-29.10-02.....8/26/22	J-80.05-00.....8/30/22
J-10.26-00.....8/30/22	J-29.15-01.....7/21/16	J-80.10-01.....8/18/21
J-12.15-00.....6/28/18	J-29.16-02.....7/21/16	J-80.12-00.....8/18/21
J-12.16-00.....6/28/18	J-30.10-01.....8/26/22	J-80.15-00.....6/28/18
J-15.10-01.....6/11/14	J-40.01-00.....8/30/22	J-81.10-02.....8/18/21
J-15.15-02.....7/10/15	J-40.05-00.....7/21/16	J-81.12-00.....9/3/21
J-20.01-00.....8/30/22	J-40.10-04.....4/28/16	J-84.05-00.....8/30/22
J-20.10-04.....7/31/19	J-40.20-03.....4/28/16	J-86.10-00.....6/28/18
J-20.11-03.....7/31/19	J-40.30-04.....4/28/16	J-90.10-03.....6/28/18
J-20.15-03.....6/30/14	J-40.35-01.....5/29/13	J-90.20-03.....6/28/18
J-20.16-02.....6/30/14	J-40.36-02.....7/21/17	J-90.21-02.....6/28/18
J-20.20-02.....5/20/13	J-40.37-02.....7/21/17	J-90.50-00.....6/28/18
J-20.26-01.....7/12/12	J-40.38-01.....5/20/13	
J-21.10-04.....6/30/14	J-40.39-00.....5/20/13	
J-21.15-01.....6/10/13	J-40.40-02.....7/31/19	
J-21.16-01.....6/10/13	J-45.36-00.....7/21/17	
J-21.17-01.....6/10/13	J-50.05-00.....7/21/17	
J-21.20-01.....6/10/13	J-50.10-01.....7/31/19	
J-22.15-02.....7/10/15	J-50.11-02.....7/31/19	

J-22.16-03.....7/10/15	J-50.12-02.....8/7/19	
J-26.10-03.....7/21/16	J-50.13-01.....8/30/22	
J-26.15-01.....5/17/12	J-50.15-01.....7/21/17	
J-26.20-01.....6/28/18	J-50.16-01.....3/22/13	
J-27.10-01.....7/21/16	J-50.18-00.....8/7/19	
J-27.15-00.....3/15/12	J-50.19-00.....8/7/19	
J-28.01-00.....8/30/22	J-50.20-00.....6/3/11	
K-70.20-01.....6/1/16	K-80.32-00.....8/17/21	K-80.35-01.....9/16/20
K-80.10-02.....9/25/20	K-80.34-00.....8/17/21	K-80.37-01.....9/16/20
L-5.10-00.....9/19/22	L-20.10-03.....7/14/15	L-40.20-02.....6/21/12
L-5.15-00.....9/19/22	L-30.10-02.....6/11/14	L-70.10-01.....5/21/08
L-10.10-02.....6/21/12	L-40.15-01.....6/16/11	L-70.20-01.....5/21/08
M-1.20-04.....9/25/20	M-11.10-04.....8/2/22	M-40.20-00.....10/12/07
M-1.40-03.....9/25/20	M-12.10-03.....8/2/22	M-40.30-01.....7/11/17
M-1.60-03.....9/25/20	M-15.10-01.....2/6/07	M-40.40-00.....9/20/07
M-1.80-03.....6/3/11	M-17.10-02.....7/3/08	M-40.50-00.....9/20/07
M-2.20-03.....7/10/15	M-20.10-04.....8/2/22	M-40.60-00.....9/20/07
M-2.21-00.....7/10/15	M-20.20-02.....4/20/15	M-60.10-01.....6/3/11
M-3.10-04.....9/25/20	M-20.30-04.....2/29/16	M-60.20-03.....8/17/21
M-3.20-04.....8/2/22	M-20.40-03.....6/24/14	M-65.10-03.....8/17/21
M-3.30-04.....9/25/20	M-20.50-02.....6/3/11	M-80.10-01.....6/3/11
M-3.40-04.....9/25/20	M-24.20-02.....4/20/15	M-80.20-00.....6/10/08
M-3.50-03.....9/25/20	M-24.40-02.....4/20/15	M-80.30-00.....6/10/08
M-5.10-03.....9/25/20	M-24.60-04.....6/24/14	
M-7.50-01.....1/30/07	M-24.65-00.....7/11/17	
M-9.50-02.....6/24/14	M-24.66-00.....7/11/17	
M-9.60-00.....2/10/09	M-40.10-03.....6/24/14	

PREVAILING MINIMUM HOURLY WAGE RATES

State of Washington
Department of Labor & Industries
Prevailing Wage Section - Telephone 360-902-5335
PO Box 44540, Olympia, WA 98504-4540

Washington State Prevailing Wage

The PREVAILING WAGES listed here include both the hourly wage rate and the hourly rate of fringe benefits. On public works projects, worker's wage and benefit rates must add to not less than this total. A brief description of overtime calculation requirements are provided on the Benefit Code Key.

Journey Level Prevailing Wage Rates for the Effective Date: 4/18/2023

<u>County</u>	<u>Trade</u>	<u>Job Classification</u>	<u>Wage</u>	<u>Holiday</u>	<u>Overtime</u>	<u>Note</u>	<u>*Risk Class</u>
Cowlitz	Asbestos Abatement Workers	Journey Level	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Boilermakers	Journey Level	\$74.29	<u>5N</u>	<u>1C</u>		View
Cowlitz	Brick Mason	Brick Finisher	\$44.33	<u>5A</u>	<u>1B</u>		View
Cowlitz	Brick Mason	Caulker-Pointer-Cleaner	\$68.14	<u>5A</u>	<u>1B</u>		View
Cowlitz	Brick Mason	Journey Level	\$68.14	<u>5A</u>	<u>1B</u>		View
Cowlitz	Building Service Employees	Janitor	\$15.74		<u>1</u>		View
Cowlitz	Building Service Employees	Shampooer	\$16.22		<u>1</u>		View
Cowlitz	Building Service Employees	Waxer	\$16.22		<u>1</u>		View
Cowlitz	Building Service Employees	Window Cleaner	\$15.89		<u>1</u>		View
Cowlitz	Cabinet Makers (In Shop)	Journey Level	\$15.74		<u>1</u>		View
Cowlitz	Carpenters	Acoustical Worker	\$64.01	<u>5A</u>	<u>1B</u>		View
Cowlitz	Carpenters	Bridge & Highway Carpenter	\$64.61	<u>5A</u>	<u>1B</u>		View
Cowlitz	Carpenters	Floor Layer And Floor Finishers	\$64.18	<u>5A</u>	<u>1B</u>		View
Cowlitz	Carpenters	Journey Level	\$64.01	<u>5A</u>	<u>1B</u>		View
Cowlitz	Carpenters	Scaffold/Shoring Erecting & Dismantling	\$64.01	<u>7E</u>	<u>4X</u>	<u>8N</u>	View
Cowlitz	Carpenters	Stationary Power Saw	\$64.18	<u>5A</u>	<u>1B</u>		View
Cowlitz	Cement Masons	Application of all Composition Mastic	\$70.09	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Application of all Epoxy Material	\$69.59	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Application of all Plastic Material	\$70.09	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Application of Sealing Compound	\$69.59	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Application of Underlayment	\$70.09	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Building General	\$69.59	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Composition or Kalman Floors	\$70.09	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Concrete Paving	\$69.59	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Curb & Gutter Machine	\$70.09	<u>15J</u>	<u>4U</u>		View
Cowlitz	Cement Masons	Curb & Gutter, Sidewalks	\$69.59	<u>15J</u>	<u>4U</u>		View

Cowlitz Cement Masons	Curing Concrete	\$69.59	15J	4U	View
Cowlitz Cement Masons	Finish Colored Concrete	\$70.09	15J	4U	View
Cowlitz Cement Masons	Floor Grinding	\$70.09	15J	4U	View
Cowlitz Cement Masons	Floor Grinding/Polisher	\$69.59	15J	4U	View
Cowlitz Cement Masons	Green Concrete Saw, self-powered	\$70.09	15J	4U	View
Cowlitz Cement Masons	Grouting of all Plates	\$69.59	15J	4U	View
Cowlitz Cement Masons	Grouting of all Tilt-up Panels	\$69.59	15J	4U	View
Cowlitz Cement Masons	Guniting Nozzleman	\$70.09	15J	4U	View
Cowlitz Cement Masons	Hand Powered Grinder	\$70.09	15J	4U	View
Cowlitz Cement Masons	Journey Level	\$69.59	15J	4U	View
Cowlitz Cement Masons	Patching Concrete	\$69.59	15J	4U	View
Cowlitz Cement Masons	Pneumatic Power Tools	\$70.09	15J	4U	View
Cowlitz Cement Masons	Power Chipping & Brushing	\$70.09	15J	4U	View
Cowlitz Cement Masons	Sand Blasting Architectural Finish	\$70.09	15J	4U	View
Cowlitz Cement Masons	Screed & Rodding Machine	\$70.09	15J	4U	View
Cowlitz Cement Masons	Spackling or Skim Coat Concrete	\$69.59	15J	4U	View
Cowlitz Cement Masons	Troweling Machine Operator	\$70.09	15J	4U	View
Cowlitz Cement Masons	Troweling Machine Operator on Colored Slabs	\$70.09	15J	4U	View
Cowlitz Cement Masons	Tunnel Workers	\$70.09	15J	4U	View
Cowlitz Divers & Tenders	Bell/Vehicle/Submersible Operator (not under pressure)	\$114.53	5A	1B	View
Cowlitz Divers & Tenders	Dive Master	\$82.53	5A	1B	View
Cowlitz Divers & Tenders	Dive Supervisor	\$82.53	5A	1B	View
Cowlitz Divers & Tenders	Diver	\$114.53	5A	1B	8V View
Cowlitz Divers & Tenders	Diver On Standby	\$77.53	5A	1B	View
Cowlitz Divers & Tenders	Diver Tender	\$70.53	5A	1B	View
Cowlitz Divers & Tenders	Manifold Operator	\$70.53	5A	1B	View
Cowlitz Divers & Tenders	Manifold Operator Mixed Gas	\$75.53	5A	1B	View
Cowlitz Divers & Tenders	Remote Operated Vehicle Operator/Technician	\$70.53	5A	1B	View
Cowlitz Divers & Tenders	Remote Operated Vehicle Tender	\$65.87	5A	1B	View
Cowlitz Dredge Workers	Assistant Engineer	\$64.45	5D	1N	8D View
Cowlitz Dredge Workers	Assistant Mate (deckhand)	\$59.09	5D	1N	8D View
Cowlitz Dredge Workers	Boatman (licensed)	\$64.45	5D	1N	8D View
Cowlitz Dredge Workers	Fill Equipment Operator	\$61.79	5D	1N	8D View
Cowlitz Dredge Workers	Fireman	\$62.96	5D	1N	8D View
Cowlitz Dredge Workers	Leverman (hydraulic & Clamshell)	\$67.61	5D	1N	8D View
Cowlitz Dredge Workers	Mate	\$64.45	5D	1N	8D View
Cowlitz Dredge Workers	Oiler	\$59.09	5D	1N	8D View
Cowlitz Dredge Workers	Tenderman (boatman Attending Dredge Plant)	\$62.96	5D	1N	8D View
Cowlitz Dredge Workers	Welder	\$64.45	5D	1N	8D View

Cowlitz	Drywall Applicator	Journey Level	\$64.01	5A	1B	View
Cowlitz	Drywall Tapers	Journey Level	\$62.05	7E	1E	View
Cowlitz	Electrical Fixture Maintenance Workers	Journey Level	\$25.23		1	View
Cowlitz	Electricians - Inside	Journey Level	\$86.49	5A	1B	View
Cowlitz	Electricians - Inside	Journeyman, Welder	\$92.40	5A	1B	View
Cowlitz	Electricians - Motor Shop	Craftsman	\$15.74		1	View
Cowlitz	Electricians - Motor Shop	Journey Level	\$15.74		1	View
Cowlitz	Electricians - Powerline Construction	Cable Splicer	\$93.00	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Certified Line Welder	\$85.42	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Groundperson	\$55.27	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Heavy Line Equipment Operator	\$85.42	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Journey Level Lineperson	\$85.42	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Line Equipment Operator	\$73.35	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Meter Installer	\$55.27	5A	4D	8W View
Cowlitz	Electricians - Powerline Construction	Pole Sprayer	\$85.42	5A	4D	View
Cowlitz	Electricians - Powerline Construction	Powderperson	\$63.50	5A	4D	View
Cowlitz	Electronic Technicians	Journey Level	\$70.83	5A	1B	View
Cowlitz	Elevator Constructors	Mechanic	\$107.93	5N	4A	View
Cowlitz	Elevator Constructors	Mechanic In Charge	\$116.52	5N	4A	View
Cowlitz	Fabricated Precast Concrete Products	Journey Level	\$15.74		1	View
Cowlitz	Fabricated Precast Concrete Products	Journey Level - In-Factory Work Only	\$15.74		1	View
Cowlitz	Fence Erectors	Fence Erector	\$45.69	6Z	1M	View
Cowlitz	Fence Erectors	Fence Laborer	\$45.69	6Z	1M	View
Cowlitz	Flaggers	Journey Level	\$48.83	6Z	1M	View
Cowlitz	Glaziers	Journey Level	\$71.47	7I	11K	View
Cowlitz	Heat & Frost Insulators And Asbestos Workers	Mechanic	\$80.49	5N	1F	View
Cowlitz	Heating Equipment Mechanics	Journey Level	\$94.11	7F	1E	View
Cowlitz	Hod Carriers & Mason Tenders	Journey Level	\$55.45	5D	1B	View
Cowlitz	Industrial Power Vacuum Cleaner	Journey Level	\$15.74		1	View
Cowlitz	Inland Boatmen	Boat Operator	\$61.41	5B	1K	View
Cowlitz	Inland Boatmen	Cook	\$56.48	5B	1K	View
Cowlitz	Inland Boatmen	Deckhand	\$57.48	5B	1K	View
Cowlitz	Inland Boatmen	Deckhand Engineer	\$58.81	5B	1K	View
Cowlitz	Inland Boatmen	Launch Operator	\$58.89	5B	1K	View
Cowlitz	Inland Boatmen	Mate	\$57.31	5B	1K	View

Cowlitz	Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Cleaner Operator, Foamer Operator	\$15.74		<u>1</u>		View
Cowlitz	Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Grout Truck Operator	\$15.74		<u>1</u>		View
Cowlitz	Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Head Operator	\$15.74		<u>1</u>		View
Cowlitz	Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Technician	\$15.74		<u>1</u>		View
Cowlitz	Inspection/Cleaning/Sealing Of Sewer & Water Systems By Remote Control	Tv Truck Operator	\$15.74		<u>1</u>		View
Cowlitz	Insulation Applicators	Journey Level	\$64.18	<u>5A</u>	<u>1B</u>		View
Cowlitz	Ironworkers	Journey Level	\$75.11	<u>7N</u>	<u>1O</u>		View
Cowlitz	Laborers	Anchor Machines	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Laborers	Application (including Pot Power Tender For Same), Applying Protective Material By Hand Or Nozzle On Utility Lines Or Storage Tanks On Project	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Asbestos Removal	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Laborers	Asphalt Plant Laborers	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Asphalt Raker	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Laborers	Asphalt Spreaders	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Ballast Regulators	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Laborers	Batch Weighman	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Bit Grinder	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz	Laborers	Brick Pavers (Dry)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Broomers	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Brush (power Saw)	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Brush Burners And Cutters	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Burners	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Car And Truck Loaders	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Carpenter Tender	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Change-house Man Or Dry Shack Man	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Chipping Guns	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Choker Setters	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Choker Splicer	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Chuck Tender	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Clary Power Spreader And Similar Types	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Clean Up Laborers	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz	Laborers	Clean-up Nozzleman-green-cutter (concrete Rock, Etc.)	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Concrete Crew, Bull Gang	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz	Laborers	Concrete Laborers	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View

Cowlitz Laborers	Concrete Nozzlemen	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Concrete Power Buggyman	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Concrete Saw Operator	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Concrete Saw Operator (walls)	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Confined Space / Hole Watch	\$48.83	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Crusher Feeder	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Curing, Concrete	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Demolition And Wrecking Charred Materials	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Demolition, Wrecking And Moving Laborers	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Drill Doctor	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Drill Operators, Air Tracks, Cat Drills, Wagon Drills, Rubber-mounted Drills And Other Similar Types, Including At Crusher Plants	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Dry Pack Machine	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Dry Stack Walls	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Dumpers, Road Oiling Crew	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Dumpmen (for Grading Crew)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Elevator Feeders	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Erosion Control Specialist	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Final Clean-up	\$48.83	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Fine Graders	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Fire Watch	\$48.83	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Form Strippers (not Swinging Stages)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	General Laborer	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Grade Checker	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Guard Rail, Median Rail, Reference Post Guide Post, Right-of-way Marker	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Gunitite Nozzleman	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Gunitite Nozzleman Tender	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Gunitite Or Sand Blasting Pot Tender	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Hand Placed Sand Blasting (wet)	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Handlers Or Mixers Of All Materials Of An Irritating Nature (including Cement & Lime)	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Hazardous Waste Worker	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	High Scalers, Strippers And Drillers Covers Work In Swinging Stages, Chairs Or Belts, Under Extreme Conditions Unusual To Blasting, Barring Down, Or S	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Jackhammer	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View

Cowlitz	Laborers	Laser Beam	\$53.93	6Z	1M		View
Cowlitz	Laborers	Laser Beam (pipe Laying) - Applicable When Employee Assigned To Move, Set Up, Align	\$53.93	6Z	1M		View
Cowlitz	Laborers	Laser Beam (tunnel) - Applicable When Employee Assigned To Move, Set Up, Align	\$53.93	6Z	1M		View
Cowlitz	Laborers	Lead Abatement	\$53.43	6Z	1M		View
Cowlitz	Laborers	Leverman Or Aggregate Spreaders (flaherty And Similar Types)	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Loading Spotters	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Loop Installation	\$53.93	6Z	1M		View
Cowlitz	Laborers	Manhole Building	\$53.43	6Z	1M		View
Cowlitz	Laborers	Material Yard Man (including Electrical)	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Miner - Tunnel	\$53.93	6Z	1M		View
Cowlitz	Laborers	Miner - Tunnel	\$53.93	6Z	1M		View
Cowlitz	Laborers	Mold Remediation Or Removal	\$53.43	6Z	1M		View
Cowlitz	Laborers	Multiple Tampers	\$53.43	6Z	1M		View
Cowlitz	Laborers	Nippers And Timbermen	\$53.43	6Z	1M		View
Cowlitz	Laborers	Nuclear Plant Worker - Lead Shield	\$53.43	6Z	1M		View
Cowlitz	Laborers	Paving Breakers	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Pilot Car	\$48.83	6Z	1M		View
Cowlitz	Laborers	Pipe Doping & Wrapping	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Pipe Layer All Types	\$53.93	6Z	1M		View
Cowlitz	Laborers	Pittsburgh Chipper Operator Or Similar Types	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Post Hold Digger, Air, Gas Or Electric	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Pot Tender	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Powderman	\$53.93	6Z	1M		View
Cowlitz	Laborers	Powderman Tender	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Power Jacks	\$53.43	6Z	1M		View
Cowlitz	Laborers	Power Saw Operators (bucking & Falling)	\$53.43	6Z	1M		View
Cowlitz	Laborers	Pressure Washer	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Pumpcrete Nozzleman	\$53.93	6Z	1M		View
Cowlitz	Laborers	Railroad Track Laborers	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Ribbon Setter, Head	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Ribbon Setters (including Steel Forms)	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Rigger/Signal Persion	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Rip Rap Man (hand Placed)	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Rip Rap Man (head)	\$52.84	6Z	1M	8S	View
Cowlitz	Laborers	Road Pump Tender	\$52.06	6Z	1M	8T	View
Cowlitz	Laborers	Sand Blasting (dry)	\$53.43	6Z	1M		View
Cowlitz	Laborers	Scaffold Tender	\$52.06	6Z	1M	8T	View

Cowlitz Laborers	Sewer Labor	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Sewer Timbermen	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Signalman	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Skipman	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Slopers	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Spraymen	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Stake Chaser	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Stake-setter	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Stockpiler	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Tampers	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Tie Back Shoring	\$52.84	<u>6Z</u>	<u>1M</u>	<u>8S</u>	View
Cowlitz Laborers	Timber Faller And Bucker (hand Labor)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Toolroom Man (at Job Site)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Track Liners	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Traffic Control Laborer	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Traffic Control Supervisor	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tugger Operator	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Bullgang (above Ground)	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Chuck Tenders	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Motorman - Dinky Locomotive	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Muckers, Brakemen	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Powderman	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Tunnel Shield Operator	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Vibrating Screed	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Vibrators (all Types)	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Water Blaster	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers	Weight-man-crusher (aggregate When Used)	\$52.06	<u>6Z</u>	<u>1M</u>	<u>8T</u>	View
Cowlitz Laborers	Welder	\$53.43	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers - Underground Sewer & Water	General Laborer and Topman	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Laborers - Underground Sewer & Water	Pipe Layer	\$53.93	<u>6Z</u>	<u>1M</u>		View
Cowlitz Landscape Construction	Landscape Operator	\$63.15	<u>7B</u>	<u>4G</u>	<u>8U</u>	View
Cowlitz Landscape Construction	Landscaping or Planting Laborer	\$41.52	<u>6Z</u>	<u>1M</u>		View
Cowlitz Landscape Maintenance	Groundskeeper	\$15.74		<u>1</u>		View
Cowlitz Lathers	Journey Level	\$63.65	<u>5A</u>	<u>1B</u>		View
Cowlitz Marble Setters	Journey Level	\$69.14	<u>5A</u>	<u>1B</u>		View
Cowlitz Metal Fabrication (In Shop)	Fitter	\$25.33	<u>7S</u>	<u>1B</u>		View
Cowlitz Metal Fabrication (In Shop)	Machine Operator	\$25.33	<u>7S</u>	<u>1B</u>		View
Cowlitz Metal Fabrication (In Shop)	Welder	\$25.33	<u>7S</u>	<u>1B</u>		View
Cowlitz Millwright	Journey Level	\$69.85	<u>5A</u>	<u>1B</u>		View
Cowlitz Modular Buildings	Journey Level	\$15.74		<u>1</u>		View
Cowlitz Painters	Bridge Painter	\$52.67	<u>7E</u>	<u>11L</u>		View

Cowlitz	Painters	Commercial Painter	\$45.20	7E	11L		View
Cowlitz	Painters	Industrial Painter	\$47.00	7E	11L	9F	View
Cowlitz	Pile Driver	Journey Level	\$65.00	5A	1B		View
Cowlitz	Plasterers	Journey Level	\$60.39	5H	1E		View
Cowlitz	Playground & Park Equipment Installers	Journey Level	\$15.74		1		View
Cowlitz	Plumbers & Pipefitters	Journey Level	\$84.72	5A	1G		View
Cowlitz	Power Equipment Operators	Air Filtration Equipment(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt Plant (any Type) (assistant Engineer Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Burner & Reconditioner (any Type), (asst To Engineer If Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Extrusion Machine Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Paver (screed Man Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Pugmill (any Type) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Raker(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Roller (any Asphalt Mix)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Roto-mill, Pavement Profiler Under 8 Ft Lateral Cut(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Roto-mill, Pavement Profiler, 8 Ft Lateral Cut & Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Roto-mill, Pavement Profiler, Groundman(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Screed(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Asphalt, Truck Mounted Spreader, With Screed(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Auger Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Auto Grader Or "trimmer" (grade Checker Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Back Filling Machine (assistant To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Backhoe, Robotic, Track And Wheel Type Up To And Including 20,000 Lbs. With Any Attachments(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Band Wagons (in Conjunction With Whell Excavator)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bell Man (any Type Of Communication)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Blade Any Type(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Blade, Robotic(group 2)	\$68.87	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Boatman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Boatman, Licensed(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bobcat, Skid Steer (< 1yd) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Boom Type Lifting Device, 5 Ton Capacity Or Less(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Boring Machine (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Broom Self-propelled, Construction Job Site(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bulldozer Operator, 20,000 Lbs Or Less, Or 100 Horse Or Less(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bulldozer Operator, Over 20,000 Lbs And More Than 100 Horse Up To 70,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bulldozer Over 70,000 Lbs Up To And Including 120,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bulldozer Over 120,000 Lbs And Above(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Bulldozer Robotic Equipment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Cable-plow (any Type)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Cableway 25 Ton & Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Cableway Up To 25 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Canal Trimmer (grade Oiler Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Cat Drill (john Henry)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Cement Pump(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Challenger(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Chip Spreading Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Chippers (asst To Engineer If Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Churn Drill & Earth Boring Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Combination Heavy Duty Mechanic-welder, When Required To Do Both(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Compactor Self Propelled Without Blade(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Compactor With Blade Self Propelled(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Compactor, Multi-engine(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Compactor, Robotic(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Compressor (any Power) 1,250 Cu Ft And Over Total	\$63.15	7B	4G	8U	View

		Capacity(group 5)					
Cowlitz	Power Equipment Operators	Compressor Operator (any Power) Under 1,250 Cu Ft Total Capacity(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Batch Plant And/or Wet Mix (3 Units Or More) (group1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Batch Plant And/or Wet Mix Operator (1 & 2 Drums)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Batch Plant Quality Control(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Breaker (assistant To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Canal Line, Assistant To Engineer Required(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Curing Machine (riding Type)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Diamond Head Profiler(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Paving Road Mixer(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Planer(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete Saw(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Automatic Slip Form Paver (asst To Engineer Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Combination Mixer & Compressor Operator, Gunite Work(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Curb Machine Mechanical Berm, Curb And/or Curb And Gutter(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Finishing Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Grout Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Grouting Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Joint Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Mixer Mobile(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Mixer Single Drum Any Capacity(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Paving Machine 8' And Less (asst To Engineer Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Placing Boom(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Pump Truck(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Pump(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Pumpcrete Operator (any Type)(group 5)	\$63.15	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Concrete, Reinforced Tank Banding Machine (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Slip Form Pumps, Power Driven Hydraulic Lifting Device For Concrete Forms(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Spreader(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Telebelt(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Concrete, Treated Base Roller Operator, Oiling(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Conveyor Operator Or Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Conveyored Material Hauler(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Bridge Locomotive, Gantry And Overhead(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Carry Deck(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Chicago Boom & Similar Types(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Floating (derrick Barge) 30 Ton But Less Than 150 Ton (asst To Engineer Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Floating 150 Ton But Less Than 250 Ton (asst To Engineer Required) (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Floating 250 Ton And Over (asst To Engineer And Deckhand Required)(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Floating Clamshell 3 Cu. Yds. & Over (fireman Or Diesel Electric Engineer Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Floating Clamshell, Dragline Etc. Operator Under 3 Cu. Yds. Or Less Than 30 Ton (diesel-electric Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic 200 Ton Through 399 Ton (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic 50 Ton Through 89 Ton With Luffing Or Tower Attachment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic 50 Ton Through 89 Tons(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic 90 Ton Through 199 Ton With Luffing Or Tower Attachment (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic 90 Ton Through 199 Ton(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic Crane 200 Ton Through 300 Ton With Luffing Or Tower Attachment(group 1)	\$72.94	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Crane, Hydraulic Crane 400 Ton And Over(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic Crane Over 300 Ton Through 399 Ton With Luffer Or Tower Attachment(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Hydraulic Under 50 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 200 Ton Through 299 Ton, With Over 200' Boom(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 300 Ton Through 399 Ton(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 300 Ton Through 399 Ton, With Over 200' Boom(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 50 Ton Through 89 Ton With 150' Boom Or Less(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 50 Ton Through 89 Ton With Over 150' Boom	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom 90 Ton Through 199 Ton With 150' - 200' Boom(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom Under 50 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom, 200 Ton Through 299 Ton With 200' Boom Or Less (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Lattice Boom, 90 Ton Through 199 Ton With Over 200' Boom (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Shovel, Dragline Or Clamshell 3 Cu. Yds. But Less Than 5 Cu. Yds. (asst To Engineer Required)(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Tower Crane With 175' Tower Or Less And With Less Than 200' Jib(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Tower Crane With Over 175' Tower Or Over 200' Jib (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Tugger(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Whirley 90 Ton And Over (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crane, Whirley Under 90 Ton(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crusher Feeder(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crusher Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Crusher Plant(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Deckhand(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Derrick Operator Under 100 Ton (two Operators Required	\$64.39	7B	4G	8U	View

		When Swing Control Is Remote From Hoist)(group 4)					
Cowlitz	Power Equipment Operators	Diesel-electric Engineer (plant Or Floating)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Directional Drill Over 20,000 Lbs Pullback(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Cat Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Directional Type Less Than 20,000 Lbs Pullback(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Doctor And/or (bit Grinder)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Mud Mixer(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill Oscillator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Drill, Directinal Locator(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Driller, Percussion, Diamond, Core, Cable, Rotary & Similar Type(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Elevating Grader Operator, Tractor Towed Requiring Operator Or Grader(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Elevating Loader Operator (any Type)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Elevator To Move Personnel Or Materials(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Excavator Over 80,000 Lbs Through 130,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Excavator Operator, Over 20,000 Lbs Through 80,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Excavator Operator, Over 130,000 Lbs(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Fireman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Floating, Crane 350 Ton And Over (asst To Engineer And Deckhand Required)(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Fork Lift(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Fork Lift, Over 10 Ton Or Robotic(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Generator Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Grade Checker(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Grade Setter / Layout From Plans(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Grade-all(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Guardrail Machines, I.e. Punch, Auger, Etc.(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Guardrail Punch Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hammer Operator (pile Driver) (group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Heavy Duty Repairman Assistant(group 6)	\$59.93	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Heavy Equipment Robotics Operator Or Mechanic(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Helicopter Hoist(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Helicopter Radioman (ground) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Helicopter When Used In Erecting Workcrane(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hoist Operator, Single Drum(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hoist, 2 Drums Or More(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hoist, Stiff Leg, Guy Derrick Or Similar Type, 50 Ton And Over(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydraulic Backhoe Track Type Up To And Including 20,000 Lbs(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydraulic Backhoe Wheel Type (any Make)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydraulic Pipe Press(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydro Axe (loader Mounted Or Similar Type)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydrographic Seeder Machine Straw, Pulp Or Seed(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Hydrostatic Pump Operator(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Internal Full Slab Vibrator Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Jack Operator, Elevating Barges, Barge Operator, Self-unloading (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Laser Screed(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Lattice Boom Crane 400 Ton And Over(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Lime Spreader, Construction Job Site(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Loaders Operator, Front End & Overhead, 25,000 Lbs And Less Than 60,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Loaders, 120,000 Lbs And Above(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Loaders, 60,000 Lbs And Less Than 120,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Loaders, Rubber-tire Type, Less Than 25,000 Lbs(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Log Skidders(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Master Environmental Maintenance Mechanic(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Material Handler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Mechanic, Heavy Duty(group 4)	\$64.39	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Mixer Box (c.t.b., Dry Batch, Etc.)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Parts Man (tool Room)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pavement Grinder And Or Grooving Machine (riding Type)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pile Driver Operator (not Crane Type) (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pipe Bending, Cleaning, Doping And Wrapping Machines(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pipe, Cast In Place Pipe Laying Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Plant Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pump (any Power)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Pump Operator, More Than 5 Pumps (any Size)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Ballast Compactor, Regulator Or Tamper Machines(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Ballast Tamper Multi-purpose(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Brakeman, Switchman, Motorman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Car Mover(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Clip Applicator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, High Rail Self Loader Truck(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Lo-railer(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Locomotive, 40 Ton And Over (asst To Engineer Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Shuttle Car Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Speedswing(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Switchman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Tamping Machine, Mechanical, Self-propelled(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rail, Track Liner(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Remote Controlled Earth Moving Equipment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rigger(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Roller Grading (not Asphalt)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Rubber-tired Dozers And Pushers(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Scraper All Types(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Service Oiler (greaser)(group 5)	\$63.15	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Shovel, Dragline, Clamshell, 5 Yards And Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Side-boom(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Skip Loader, Drag Box(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Stump Grinder (loader Mounted Or Similar Type) (group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Surface Heater And Planer(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Sweeper Self-propelled, Construction Job Site(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tar Pot Fireman (power Agitated) Or Not(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tractor Rubber-tired, 50 Hp Flywheel & Under(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tractor, Rubber-tired Over 50 Hp Flywheel(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Trenching Machine 3 Ft Depth And Deeper (asst To The Operator If Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Trenching Machine Operator, Maximum Digging Capacity 3 Ft Depth(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck Crane Oiler-driver(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, All Terrain Or Track Type(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Barrel Type(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Boom(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Off-road Trucks, Articulated And Non-articulated Trucks(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Offroad Trucks, Articulated And Non-articulated Trucks(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Vacuum(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Truck, Water(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tub Grinder(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel Boring Machine Mechanic(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel Boring Machine(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel Segment Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel Separation Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel Shaef Loader(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel, Locomotive, Dinkey(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel, Micro Boring Tunnel Machine(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel, Mucking Machine(group 4)	\$64.39	7B	4G	8U	View

Cowlitz	Power Equipment Operators	Tunnel, Power Jumbo Setting Slip Forms, Etc.(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Tunnel, Shield Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Ultra High Pressure Water Jet Cutting Tool System Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Underwater Equipment, Remote Or Otherwise(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Vacuum Blasting Machine Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Water Pulls, Water Wagon(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Welder's Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Welder; Heavy Duty, Certified Or Not(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Welding Machine(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Wheel Excavation Any Size (grade Oiler Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators	Wire Mat Or Brooming Machine(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Air Filtration Equipment(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt Plant (any Type) (assistant Engineer Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Burner & Reconditioner (any Type), (asst To Engineer If Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Extrusion Machine Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Paver (screed Man Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Pugmill (any Type) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Raker(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Roller (any Asphalt Mix)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Roto-mill, Pavement Profiler Under 8 Ft Lateral Cut(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Roto-mill, Pavement Profiler, 8 Ft Lateral Cut & Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Roto-mill, Pavement Profiler, Groundman(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Screed(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Asphalt, Truck Mounted Spreader, With Screed(group 6)	\$59.93	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Auger Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Auto Grader Or "trimmer" (grade Checker Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Back Filling Machine (assistant To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Backhoe, Robotic, Track And Wheel Type Up To And Including 20,000 Lbs. With Any Attachments(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Band Wagons (in Conjunction With Whell Excavator)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bell Man (any Type Of Communication)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Blade Any Type(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Blade, Robotic(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Boatman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Boatman, Licensed(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bobcat, Skid Steer (< 1yd) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Boom Type Lifting Device, 5 Ton Capacity Or Less(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Boring Machine (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Broom Self-propelled, Construction Job Site(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bulldozer Operator, 20,000 Lbs Or Less, Or 100 Horse Or Less(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bulldozer Operator, Over 20,000 Lbs And More Than 100 Horse Up To 70,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bulldozer Over 70,000 Lbs Up To And Including 120,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bulldozer Over 120,000 Lbs And Above(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Bulldozer Robotic Equipment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Cable-plow (any Type)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Cableway 25 Ton & Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Cableway Up To 25 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Canal Trimmer (grade Oiler Required)(group 2)	\$68.87	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Cat Drill (john Henry)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Cement Pump(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Challenger(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Chip Spreading Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Chippers (asst To Engineer If Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Churn Drill & Earth Boring Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Combination Heavy Duty Mechanic-welder, When Required To Do Both(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compactor Self Propelled Without Blade(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compactor With Blade Self Propelled(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compactor, Multi-engine(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compactor, Robotic(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compressor (any Power) 1,250 Cu Ft And Over Total Capacity(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Compressor Operator (any Power) Under 1,250 Cu Ft Total Capacity(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Batch Plant And/or Wet Mix (3 Units Or More) (group1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Batch Plant And/or Wet Mix Operator (1 & 2 Drums)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Batch Plant Quality Control(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Breaker (assistant To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Canal Line, Assistant To Engineer Required(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Curing Machine (riding Type)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Diamond Head Profiler(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Paving Road Mixer(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Planer(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete Saw(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Automatic Slip Form Paver (asst To Engineer	\$68.87	7B	4G	8U	View

		Required)(group 2)					
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Combination Mixer & Compressor Operator, Guniting Work(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Curb Machine Mechanical Berm, Curb And/or Curb And Gutter(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Finishing Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Grout Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Grouting Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Joint Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Mixer Mobile(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Mixer Single Drum Any Capacity(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Paving Machine 8' And Less (asst To Engineer Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Placing Boom(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Pump Truck(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Pump(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Pumpcrete Operator (any Type)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Reinforced Tank Banding Machine (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Slip Form Pumps, Power Driven Hydraulic Lifting Device For Concrete Forms(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Spreader(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Telebelt(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Concrete, Treated Base Roller Operator, Oiling(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Conveyor Operator Or Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Conveyored Material Hauler(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Bridge Locomotive, Gantry And Overhead(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Carry Deck(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Chicago Boom & Similar Types(group 4)	\$64.39	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Floating (derrick Barge) 30 Ton But Less Than 150 Ton (asst To Engineer Required) (group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Floating 150 Ton But Less Than 250 Ton (asst To Engineer Required) (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Floating 250 Ton And Over (asst To Engineer And Deckhand Required)(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Floating Clamshell 3 Cu. Yds. & Over (fireman Or Diesel Electric Engineer Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Floating Clamshell, Dragline Etc. Operator Under 3 Cu. Yds. Or Less Than 30 Ton (diesel-electric Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic 200 Ton Through 399 Ton (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic 50 Ton Through 89 Ton With Luffing Or Tower Attachment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic 50 Ton Through 89 Tons(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic 90 Ton Through 199 Ton With Luffing Or Tower Attachment (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic 90 Ton Through 199 Ton(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic Crane 200 Ton Through 300 Ton With Luffing Or Tower Attachment(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic Crane 400 Ton And Over(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic Crane Over 300 Ton Through 399 Ton With Luffer Or Tower Attachment(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Hydraulic Under 50 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 200 Ton Through 299 Ton, With Over 200' Boom(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 300 Ton Through 399 Ton(group 1)	\$72.94	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 300 Ton Through 399 Ton, With Over 200' Boom(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 50 Ton Through 89 Ton With 150' Boom Or Less(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 50 Ton Through 89 Ton With Over 150'	\$68.87	7B	4G	8U	View

		Boom					
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom 90 Ton Through 199 Ton With 150' - 200' Boom(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom Under 50 Ton(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom, 200 Ton Through 299 Ton With 200' Boom Or Less (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Lattice Boom, 90 Ton Through 199 Ton With Over 200' Boom (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Shovel, Dragline Or Clamshell 3 Cu. Yds. But Less Than 5 Cu. Yds. (asst To Engineer Required)(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Tower Crane With 175' Tower Or Less And With Less Than 200' Jib(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Tower Crane With Over 175' Tower Or Over 200' Jib (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Tugger(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Whirley 90 Ton And Over (group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crane, Whirley Under 90 Ton(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crusher Feederman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crusher Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Crusher Plant(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Deckhand(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Derrick Operator Under 100 Ton (two Operators Required When Swing Control Is Remote From Hoist)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Diesel-electric Engineer (plant Or Floating)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Directional Drill Over 20,000 Lbs Pullback(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Cat Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Directional Type Less Than 20,000 Lbs Pullback(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Doctor And/or (bit Grinder)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Mud Mixer(group 5)	\$63.15	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill Oscillator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Drill, Directinal Locator(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Driller, Percussion, Diamond, Core, Cable, Rotary & Similar Type(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Elevating Grader Operator, Tractor Towed Requiring Operator Or Grader(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Elevating Loader Operator (any Type)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Elevator To Move Personnel Or Materials(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Excavator Over 80,000 Lbs Through 130,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Excavator Operator, Over 20,000 Lbs Through 80,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Excavator Operator, Over 130,000 Lbs(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Fireman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Floating, Crane 350 Ton And Over (asst To Engineer And Deckhand Required)(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Fork Lift(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Fork Lift, Over 10 Ton Or Robotic(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Generator Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Grade Checker(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Grade Setter / Layout From Plans(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Grade-all(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Guardrail Machines, I.e. Punch, Auger, Etc.(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Guardrail Punch Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hammer Operator (pile Driver) (group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Heavy Duty Repairman Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Heavy Equipment Robotics Operator Or Mechanic(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Helicopter Hoist(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Helicopter Radioman (ground) (group 6)	\$59.93	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Helicopter When Used In Erecting Workcrane(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hoist Operator, Single Drum(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hoist, 2 Drums Or More(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hoist, Stiff Leg, Guy Derrick Or Similar Type, 50 Ton And Over(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydraulic Backhoe Track Type Up To And Including 20,000 Lbs(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydraulic Backhoe Wheel Type (any Make)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydraulic Pipe Press(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydro Axe (loader Mounted Or Similar Type)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydrographic Seeder Machine Straw, Pulp Or Seed(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Hydrostatic Pump Operator(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Internal Full Slab Vibrator Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Jack Operator, Elevating Barges, Barge Operator, Self-unloading (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Laser Screed(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Lattice Boom Crane 400 Ton And Over(group 1)	\$75.10	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Lime Spreader, Construction Job Site(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Loaders Operator, Front End & Overhead, 25,000 Lbs And Less Than 60,000 Lbs(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Loaders, 120,000 Lbs And Above(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Loaders, 60,000 Lbs And Less Than 120,000 Lbs(group 3)	\$67.72	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Loaders, Rubber-tire Type, Less Than 25,000 Lbs(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Log Skidders(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Master Environmental Maintenance Mechanic(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Material Handler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Mechanic, Heavy Duty(group 4)	\$64.39	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Mixer Box (c.t.b., Dry Batch, Etc.)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Parts Man (tool Room)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pavement Grinder And Or Grooving Machine (riding Type) (group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pile Driver Operator (not Crane Type) (asst To Engineer Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pipe Bending, Cleaning, Doping And Wrapping Machines(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pipe, Cast In Place Pipe Laying Machine(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Plant Oiler(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pump (any Power)(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Pump Operator, More Than 5 Pumps (any Size)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Ballast Compactor, Regulator Or Tamper Machines(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Ballast Tamper Multi-purpose(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Brakeman, Switchman, Motorman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Car Mover(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Clip Applicator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, High Rail Self Loader Truck(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Lo-railer(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Locomotive, 40 Ton And Over (asst To Engineer Required)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Shuttle Car Operator(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Speedswing(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Switchman(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Tamping Machine, Mechanical, Self-propelled(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rail, Track Liner(group 5)	\$63.15	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Remote Controlled Earth Moving Equipment(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rigger(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Roller Grading (not Asphalt) (group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Rubber-tired Dozers And Pushers(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Scraper All Types(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Service Oiler (greaser)(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Shovel, Dragline, Clamshell, 5 Yards And Over(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Side-boom(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Skip Loader, Drag Box(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Stump Grinder (loader Mounted Or Similar Type) (group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Surface Heater And Planer(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Sweeper Self-propelled, Construction Job Site(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tar Pot Fireman (power Agitated) Or Not(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tractor Rubber-tired, 50 Hp Flywheel & Under(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tractor, Rubber-tired Over 50 Hp Flywheel(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Trenching Machine 3 Ft Depth And Deeper (asst To The Operator If Required)(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Trenching Machine Operator, Maximum Digging Capacity 3 Ft Depth(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck Crane Oiler-driver(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, All Terrain Or Track Type(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Barrel Type(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Boom(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Off-road Trucks, Articulated And Non-articulated Trucks(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Offroad Trucks, Articulated And Non-articulated Trucks(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Vacuum(group 5)	\$63.15	7B	4G	8U	View

Cowlitz	Power Equipment Operators-Underground Sewer & Water	Truck, Water(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tub Grinder(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel Boring Machine Mechanic(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel Boring Machine(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel Segment Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel Separation Plant(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel Shaef Loader(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel, Locomotive, Dinkey(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel, Micro Boring Tunnel Machine(group 1)	\$70.78	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel, Mucking Machine(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel, Power Jumbo Setting Slip Forms, Etc.(group 5)	\$63.15	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Tunnel, Shield Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Ultra High Pressure Water Jet Cutting Tool System Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Underwater Equipment, Remote Or Otherwise(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Vacuum Blasting Machine Operator(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Water Pulls, Water Wagon(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Welder's Assistant(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Welder; Heavy Duty, Certified Or Not(group 4)	\$64.39	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Welding Machine(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Wheel Excavation Any Size (grade Oiler Required)(group 2)	\$68.87	7B	4G	8U	View
Cowlitz	Power Equipment Operators-Underground Sewer & Water	Wire Mat Or Brooming Machine(group 6)	\$59.93	7B	4G	8U	View
Cowlitz	Power Line Clearance Tree Trimmers	Journey Level In Charge	\$57.22	5A	4A		View
Cowlitz	Power Line Clearance Tree Trimmers	Spray Person	\$54.32	5A	4A		View
Cowlitz	Power Line Clearance Tree Trimmers	Tree Equipment Operator	\$57.22	5A	4A		View
Cowlitz	Power Line Clearance Tree Trimmers	Tree Trimmer	\$51.18	5A	4A		View
Cowlitz	Power Line Clearance Tree Trimmers	Tree Trimmer Groundperson	\$38.99	5A	4A		View

Cowlitz	Refrigeration & Air Conditioning Mechanics	Journey Level	\$85.71	5A	1G	View
Cowlitz	Residential Brick Mason	Journey Level	\$23.02		1	View
Cowlitz	Residential Carpenters	Journey Level	\$26.70		1	View
Cowlitz	Residential Cement Masons	Journey Level	\$15.74		1	View
Cowlitz	Residential Drywall Applicators	Journey Level	\$36.07		1	View
Cowlitz	Residential Drywall Tapers	Journey Level	\$15.74		1	View
Cowlitz	Residential Electricians	Journey Level	\$30.53		1	View
Cowlitz	Residential Glaziers	Journey Level	\$42.76		1	View
Cowlitz	Residential Insulation Applicators	Journey Level	\$28.53		1	View
Cowlitz	Residential Laborers	Journey Level	\$52.06	6Z	1M	8T View
Cowlitz	Residential Marble Setters	Journey Level	\$23.02		1	View
Cowlitz	Residential Painters	Journey Level	\$45.20	7E	11L	View
Cowlitz	Residential Plumbers & Pipefitters	Journey Level	\$44.71		1	View
Cowlitz	Residential Refrigeration & Air Conditioning Mechanics	Journey Level	\$15.74		1	View
Cowlitz	Residential Sheet Metal Workers	Journey Level	\$94.11	7F	1E	View
Cowlitz	Residential Soft Floor Layers	Journey Level	\$55.98	7E	5A	View
Cowlitz	Residential Sprinkler Fitters (Fire Protection)	Journey Level	\$15.74		1	View
Cowlitz	Residential Stone Masons	Journey Level	\$23.02		1	View
Cowlitz	Residential Terrazzo Workers	Journey Level	\$15.74		1	View
Cowlitz	Residential Terrazzo/Tile Finishers	Journey Level	\$36.64		1	View
Cowlitz	Residential Tile Setters	Journey Level	\$15.74		1	View
Cowlitz	Roofers	Journey Level	\$60.90	5A	2O	View
Cowlitz	Roofers	Using Irritable Bituminous Materials	\$63.90	5A	2O	View
Cowlitz	Sheet Metal Workers	Journey Level (Field or Shop)	\$94.11	7F	1E	View
Cowlitz	Shipbuilding & Ship Repair	New Construction Heat & Frost Insulator	\$80.49	5N	1F	View
Cowlitz	Shipbuilding & Ship Repair	Ship Repair Heat & Frost Insulator	\$80.49	5N	1F	View
Cowlitz	Sign Makers & Installers (Electrical)	Journey Level	\$16.88		1	View
Cowlitz	Sign Makers & Installers (Non-Electrical)	Journey Level	\$15.74		1	View
Cowlitz	Soft Floor Layers	Journey Level	\$61.51	15J	4C	View
Cowlitz	Solar Controls For Windows	Journey Level	\$15.74		1	View
Cowlitz	Sprinkler Fitters (Fire Protection)	Journey Level	\$70.52	7J	1R	View
Cowlitz	Stage Rigging Mechanics (Non Structural)	Journey Level	\$15.74		1	View
Cowlitz	Stone Masons	Journey Level	\$68.14	5A	1B	View
Cowlitz	Street And Parking Lot Sweeper Workers	Journey Level	\$15.74		1	View
Cowlitz	Surveyors	Chain Person	\$59.93	7B	1B	9H View

Cowlitz	Surveyors	Instrument Person	\$63.15	7B	1B	9H	View
Cowlitz	Surveyors	Party Chief	\$68.87	7B	1B	9H	View
Cowlitz	Telecommunication Technicians	Journey Level	\$70.83	5A	1B		View
Cowlitz	Telephone Line Construction - Outside	Cable Splicer	\$39.15	5A	2B		View
Cowlitz	Telephone Line Construction - Outside	Hole Digger/Ground Person	\$26.29	5A	2B		View
Cowlitz	Telephone Line Construction - Outside	Telephone Equipment Operator (Light)	\$32.72	5A	2B		View
Cowlitz	Telephone Line Construction - Outside	Telephone Lineperson	\$37.00	5A	2B		View
Cowlitz	Terrazzo Workers	Journey Level	\$59.27	5A	1B		View
Cowlitz	Tile Setters	Journey Level	\$59.27	5A	1B		View
Cowlitz	Tile, Marble & Terrazzo Finishers	Finishers	\$44.20	5A	1B		View
Cowlitz	Traffic Control Stripers	Journey Level	\$53.26	7P	1K		View
Cowlitz	Truck Drivers	Asphalt Mix Over 10 Yards	\$47.01	5A	1B		View
Cowlitz	Truck Drivers	Asphalt Mix To 10 Yards	\$46.87	5A	1B		View
Cowlitz	Truck Drivers	Dump Truck	\$46.87	5A	1B		View
Cowlitz	Truck Drivers	Dump Truck And Trailer	\$47.01	5A	1B		View
Cowlitz	Truck Drivers	Other Trucks	\$47.01	5A	1B		View
Cowlitz	Truck Drivers - Ready Mix	Transit Mix 5 cubic yards and under	\$46.87	5A	1B		View
Cowlitz	Truck Drivers - Ready Mix	Transit Mix over 11 cubic yards up to 15 cubic yards	\$47.45	5A	1B		View
Cowlitz	Truck Drivers - Ready Mix	Transit Mix over 5 cubic yards up to 7 cubic yards	\$47.01	5A	1B		View
Cowlitz	Truck Drivers - Ready Mix	Transit Mix Over 7 cubic yards up to 11 cubic yards	\$47.15	5A	1B		View
Cowlitz	Well Drillers & Irrigation Pump Installers	Irrigation Pump Installer	\$15.74		1		View
Cowlitz	Well Drillers & Irrigation Pump Installers	Oiler	\$15.74		1		View
Cowlitz	Well Drillers & Irrigation Pump Installers	Well Driller	\$17.97		1		View

Overtime Codes

Overtime calculations are based on the hourly rate actually paid to the worker. On public works projects, the hourly rate must be not less than the prevailing rate of wage minus the hourly rate of the cost of fringe benefits actually provided for the worker.

1. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.
 - B. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - C. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - D. The first two (2) hours before or after a five-eight (8) hour workweek day or a four-ten (10) hour workweek day and the first eight (8) hours worked the next day after either workweek shall be paid at one and one-half times the hourly rate of wage. All additional hours worked and all worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - E. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - F. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours worked, except Labor Day, shall be paid at double the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage.
 - G. The first ten (10) hours worked on Saturdays and the first ten (10) hours worked on a fifth calendar weekday in a four-ten hour schedule, shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of ten (10) hours per day Monday through Saturday and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - H. All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions or equipment breakdown) shall be paid at one and one-half times the hourly rate of wage. All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - I. All hours worked on Sundays and holidays shall also be paid at double the hourly rate of wage.
 - J. The first two (2) hours after eight (8) regular hours Monday through Friday and the first ten (10) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked over ten (10) hours Monday through Saturday, Sundays and holidays shall be paid at double the hourly rate of wage.
 - K. All hours worked on Saturdays and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.
 - M. All hours worked on Saturdays (except makeup days if work is lost due to inclement weather conditions) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
 - N. All hours worked on Saturdays (except makeup days) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

Overtime Codes Continued

1. O. The first ten (10) hours worked on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays, holidays and after twelve (12) hours, Monday through Friday and after ten (10) hours on Saturday shall be paid at double the hourly rate of wage.
- P. All hours worked on Saturdays (except makeup days if circumstances warrant) and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.
- Q. The first two (2) hours after eight (8) regular hours Monday through Friday and up to ten (10) hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of ten (10) hours per day Monday through Saturday and all hours worked on Sundays and holidays (except Christmas day) shall be paid at double the hourly rate of wage. All hours worked on Christmas day shall be paid at two and one-half times the hourly rate of wage.
- R. All hours worked on Sundays and holidays shall be paid at two times the hourly rate of wage.
- U. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays (except Labor Day) shall be paid at two times the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage.
- V. All hours worked on Sundays and holidays (except Thanksgiving Day and Christmas day) shall be paid at one and one-half times the hourly rate of wage. All hours worked on Thanksgiving Day and Christmas day shall be paid at double the hourly rate of wage.
- W. All hours worked on Saturdays and Sundays (except make-up days due to conditions beyond the control of the employer)) shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at double the hourly rate of wage.
- X. The first four (4) hours after eight (8) regular hours Monday through Friday and the first twelve (12) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked over twelve (12) hours Monday through Saturday, Sundays and holidays shall be paid at double the hourly rate of wage. When holiday falls on Saturday or Sunday, the day before Saturday, Friday, and the day after Sunday, Monday, shall be considered the holiday and all work performed shall be paid at double the hourly rate of wage.
- Y. All hours worked outside the hours of 5:00 am and 5:00 pm (or such other hours as may be agreed upon by any employer and the employee) and all hours worked in excess of eight (8) hours per day (10 hours per day for a 4 x 10 workweek) and on Saturdays and holidays (except labor day) shall be paid at one and one-half times the hourly rate of wage. (except for employees who are absent from work without prior approval on a scheduled workday during the workweek shall be paid at the straight-time rate until they have worked 8 hours in a day (10 in a 4 x 10 workweek) or 40 hours during that workweek.) All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and Labor Day shall be paid at double the hourly rate of wage.
- Z. All hours worked on Saturdays and Sundays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid the straight time rate of pay in addition to holiday pay.

Overtime Codes Continued

2. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.
- B. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage.
- F. The first eight (8) hours worked on holidays shall be paid at the straight hourly rate of wage in addition to the holiday pay. All hours worked in excess of eight (8) hours on holidays shall be paid at double the hourly rate of wage.
- M. This code appears to be missing. All hours worked on Saturdays, Sundays and holidays shall be paid at double the hourly rate of wage.
- O. All hours worked on Sundays and holidays shall be paid at one and one-half times the hourly rate of wage.
- R. All hours worked on Sundays and holidays and all hours worked over sixty (60) in one week shall be paid at double the hourly rate of wage.
- U. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked over 12 hours in a day or on Sundays and holidays shall be paid at double the hourly rate of wage.
3. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.
- F. All hours worked on Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sunday shall be paid at two times the hourly rate of wage. All hours worked on paid holidays shall be paid at two and one-half times the hourly rate of wage including holiday pay.
- H. All work performed on Sundays between March 16th and October 14th and all Holidays shall be compensated for at two (2) times the regular rate of pay. Work performed on Sundays between October 15th and March 15th shall be compensated at one and one half (1-1/2) times the regular rate of pay.
- J. All hours worked between the hours of 10:00 pm and 5:00 am, Monday through Friday, and all hours worked on Saturdays shall be paid at a one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- K. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage. All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.
- After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more. When an employee returns to work without at least eight (8) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the eight (8) hours rest period.

Overtime Codes Continued

4. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

- A. All hours worked in excess of eight (8) hours per day or forty (40) hours per week shall be paid at double the hourly rate of wage. All hours worked on Saturdays, Sundays and holidays shall be paid at double the hourly rate of wage
- C. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay. On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay, except that if the job is down on Monday through Friday due to weather conditions or other conditions outside the control of the employer, the first ten (10) hours on Saturday may be worked at the straight time rate of pay. All hours worked over twelve (12) hours in a day and all hours worked on Sunday and Holidays shall be paid at two (2) times the straight time rate of pay.
- D. All hours worked in excess of eight (8) hours per day or forty (40) hours per week shall be paid at double the hourly rate of wage. All hours worked on Saturday, Sundays and holidays shall be paid at double the hourly rate of pay. Rates include all members of the assigned crew.

EXCEPTION:

On all multipole structures and steel transmission lines, switching stations, regulating, capacitor stations, generating plants, industrial plants, associated installations and substations, except those substations whose primary function is to feed a distribution system, will be paid overtime under the following rates:

The first two (2) hours after eight (8) regular hours Monday through Friday of overtime on a regular workday, shall be paid at one and one-half times the hourly rate of wage. All hours in excess of ten (10) hours will be at two (2) times the hourly rate of wage. The first eight (8) hours worked on Saturday will be paid at one and one-half (1-1/2) times the hourly rate of wage. All hours worked in excess of eight (8) hours on Saturday, and all hours worked on Sundays and holidays will be at the double the hourly rate of wage.

All overtime eligible hours performed on the above described work that is energized, shall be paid at the double the hourly rate of wage.

- E. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

On a four-day, ten-hour weekly schedule, either Monday thru Thursday or Tuesday thru Friday schedule, all hours worked after ten shall be paid at double the hourly rate of wage. The Monday or Friday not utilized in the normal four-day, ten hour work week, and Saturday shall be paid at one and one half (1½) times the regular shift rate for the first eight (8) hours. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- G. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked Monday through Saturday over twelve (12) hours and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- I. The First eight (8) hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of eight (8) per day on Saturdays shall be paid at double the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.

Overtime Codes Continued

4. J. The first eight (8) hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked in excess of eight (8) hours on a Saturday shall be paid at double the hourly rate of wage. All hours worked over twelve (12) in a day, and all hours worked on Sundays and Holidays shall be paid at double the hourly rate of wage.
- K. All hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage, so long as Saturday is the sixth consecutive day worked. All hours worked over twelve (12) in a day Monday through Saturday, and all hours worked on Sundays and Holidays shall be paid at double the hourly rate of wage.
- L. The first twelve (12) hours worked on a Saturday shall be paid at one and one-half times the hourly rate of wage. All hours worked on a Saturday in excess of twelve (12) hours shall be paid at double the hourly rate of pay. All hours worked over twelve (12) in a day Monday through Friday, and all hours worked on Sundays shall be paid at double the hourly rate of wage. All hours worked on a holiday shall be paid at one and one-half times the hourly rate of wage, except that all hours worked on Labor Day shall be paid at double the hourly rate of pay.
- U. The first four (4) hours after eight (8) regular hours Monday through Friday and the first twelve (12) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. (Except on makeup days if work is lost due to inclement weather, then the first eight (8) hours on Saturday may be paid the regular rate.) All hours worked over twelve (12) hours Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- S. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, work performed in excess of (10) hours shall be paid at one and one half (1-1/2) times the hourly rate of pay. On Monday through Friday, work performed outside the normal work hours of 6:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations).

All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All work performed on Sundays and holidays shall be paid at double the hourly rate of wage. When an employee returns to work without at least eight (8) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

Multiple Shift Operations: When the first shift of a multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. Special Shifts: The Special Shift Premium is the basic hourly rate of pay plus \$2.00 an hour. When due to conditions beyond the control of the employer or when an owner (not acting as the contractor), a government agency or the contract specifications require more than four (4) hours of a special shift can only be performed outside the normal 6am to 6pm shift then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they shall be paid the special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday).

Overtime Codes Continued

4. V. Work performed in excess of ten (10) hours of straight time per day when four ten (10) hour shifts are established or outside the normal shift (5 am to 6pm), and all work on Saturdays, except for make-up days shall be paid at time and one-half (1 ½) the straight time rate.

In the event the job is down due to weather conditions, then Saturday may, be worked as a voluntary make-up day at the straight time rate. However, Saturday shall not be utilized as a make-up day when a holiday falls on Friday. All work performed on Sundays and holidays and work in excess of twelve (12) hours per day shall be paid at double (2x) the straight time rate of pay.

After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

When an employee returns to work without a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

- X. All hours worked on Saturdays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays and holidays shall be paid at double the hourly rate of wage. Work performed outside the normal shift of 6 am to 6pm shall be paid at one and one-half the straight time rate, (except for special shifts or three shift operations). All work performed on Sundays and holidays shall be paid at double the hourly rate of wage. Shifts may be established when considered necessary by the Employer.

The Employer may establish shifts consisting of eight (8) or ten (10) hours of work (subject to WAC 296-127-022), that shall constitute a normal forty (40) hour work week. The Employer can change from a 5-eight to a 4-ten hour schedule or back to the other. All hours of work on these shifts shall be paid for at the straight time hourly rate. Work performed in excess of eight hours (or ten hours per day (subject to WAC 296-127-022) shall be paid at one and one-half the straight time rate.

When due to conditions beyond the control of the Employer, or when contract specifications require that work can only be performed outside the regular day shift, then by mutual agreement a special shift may be worked at the straight time rate, eight (8) hours work for eight (8) hours pay. The starting time shall be arranged to fit such conditions of work.

When an employee returns to work without at a break of eight (8) hours since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours.

11. ALL HOURS WORKED IN EXCESS OF EIGHT (8) HOURS PER DAY OR FORTY (40) HOURS PER WEEK SHALL BE PAID AT ONE AND ONE-HALF TIMES THE HOURLY RATE OF WAGE.

- B After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.

- C The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other overtime hours worked, except Labor Day, and all hours on Sunday shall be paid at double the hourly rate of wage. All hours worked on Labor Day shall be paid at three times the hourly rate of wage. All non-overtime and non-holiday hours worked between 4:00 pm and 5:00 am, Monday through Friday, shall be paid at a premium rate of 15% over the hourly rate of wage.

Overtime Codes Continued

11. D. All hours worked on Saturdays and holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked on Sundays shall be paid at double the hourly rate of wage.
- After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.
- E. The first two (2) hours after eight (8) regular hours Monday through Friday, the first ten (10) hours on Saturday, and the first ten (10) hours worked on Holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked over ten (10) hours Monday through Saturday, and Sundays shall be paid at double the hourly rate of wage.
- After an employee has worked eight (8) hours, all additional hours worked shall be paid at the applicable overtime rate until such time as the employee has had a break of eight (8) hours or more.
- F. The first two (2) hours after eight (8) regular hours Monday through Friday and the first eight (8) hours on Saturday shall be paid at one and one-half times the hourly rate of wage. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- On a four-day, ten-hour weekly schedule, either Monday thru Thursday or Tuesday thru Friday schedule, all hours worked after ten shall be paid at double the hourly rate of wage. The Monday or Friday not utilized in the normal four-day, ten hour work week, and Saturday shall be paid at one-half times the hourly rate of wage for the first eight (8) hours. All other hours worked Monday through Saturday, and all hours worked on Sundays and holidays shall be paid at double the hourly rate of wage.
- G. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage.
- All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.
- After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of nine (9) hours or more. When an employee returns to work without at least nine (9) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the nine (9) hours rest period.
- H. Work performed in excess of eight (8) hours of straight time per day, or ten (10) hours of straight time per day when four ten (10) hour shifts are established, or forty (40) hours of straight time per week, Monday through Friday, or outside the normal 5 am to 6pm shift, and all work on Saturdays shall be paid at one and one-half times the hourly rate of wage.
- All work performed after 6:00 pm Saturday to 5:00 am Monday and Holidays, and all hours worked in excess of twelve (12) hours in a single shift shall be paid at double the hourly rate of wage.
- After an employee has worked eight (8) hours at an applicable overtime rate, all additional hours shall be at the applicable overtime rate until such time as the employee has had a break of ten (10) hours or more. When an employee returns to work without at least ten (10) hours time off since their previous shift, all such time shall be a continuation of shift and paid at the applicable overtime rate until he/she shall have the ten (10) hours rest period.

Overtime Codes Continued

11. J. All hours worked on holidays shall be paid at double the hourly rate of wage.
- K. On Monday through Friday hours worked outside 4:00 am and 5:00 pm, and the first two (2) hours after eight (8) hours worked shall be paid at one and one-half times the hourly rate. All hours worked over 10 hours per day Monday through Friday, and all hours worked on Saturdays, Sundays, and Holidays worked shall be paid at double the hourly rate of wage.
- L. An employee working outside 5:00 am and 5:00 pm shall receive an additional two dollar (\$2.00) per hour for all hours worked that shift. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage. All hours worked on holidays shall be paid at one and one-half times the hourly rate of wage.
- M. On Monday through Friday, the first four (4) hours of overtime after eight (8) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay, unless a four (4) day ten (10) hour workweek has been established. On a four (4) day ten (10) hour workweek scheduled Monday through Thursday, or Tuesday through Friday, the first two (2) hours of overtime after ten (10) hours of straight time work shall be paid at one and one half (1-1/2) times the straight time rate of pay.
- Work performed outside the normal work hours of 5:00 a.m. and 6:00 p.m. shall be paid at one and one-half (1-1/2) times the straight time rate, (except for special shifts or multiple shift operations). When the first shift of a multiple shift (a two or three shift) operation is started at the basic straight time rate or at a specific overtime rate, all shifts of that day's operation shall be completed at that rate. When due to conditions beyond the control of the Employer or when contract specifications require that work can only be performed outside the regular day shift of 5:00 am to 6:00 pm, then a special shift may be worked at the straight time rate, plus the shift pay premium when applicable. The starting time of work will be arranged to fit such conditions of work. Such shift shall consist of eight (8) hours work for eight (8) hours pay or ten (10) hours work for ten (10) hours pay for four ten shifts.
- On Saturday, the first twelve (12) hours of work shall be paid at one and one half (1-1/2) times the straight time rate of pay. All work performed after 6:00 pm Saturday to 5:00 am Monday, all work performed over twelve (12) hours, and all work performed on holidays shall be paid at double the straight time rate of pay.
- Shift Pay Premium: In an addition to any overtime already required, all hours worked between the hours of 6:00 pm and 5:00 am shall receive an additional two dollars (\$2.00) per hour.
- N. All work performed over twelve hours in a shift and all work performed on Sundays and Holidays shall be paid at double the straight time rate.
- Any time worked over eight (8) hours on Saturday shall be paid double the straight time rate, except employees assigned to work six 10-hour shifts per week shall be paid double the straight time rate for any time worked on Saturday over 10 hours.

Holiday Codes

- 5. A. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, and Christmas Day (7).
- B. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, the day before Christmas, and Christmas Day (8).
- C. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8).
- D. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8).
- H. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Day after Thanksgiving Day, And Christmas (6).
- I. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6).
- K. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday After Thanksgiving Day, The Day Before Christmas, And Christmas Day (9).
- L. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (8).
- N. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Veterans' Day, Thanksgiving Day, The Friday After Thanksgiving Day, And Christmas Day (9).
- P. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday And Saturday After Thanksgiving Day, The Day Before Christmas, And Christmas Day (9). If A Holiday Falls On Sunday, The Following Monday Shall Be Considered As A Holiday.
- Q. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6).
- R. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Day After Thanksgiving Day, One-Half Day Before Christmas Day, And Christmas Day. (7 1/2).
- S. Paid Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, And Christmas Day (7).
- Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8).
- 6. G. Paid Holidays: New Year's Day, Martin Luther King Jr. Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Veterans' Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, and Christmas Eve Day (11).
- H. Paid Holidays: New Year's Day, New Year's Eve Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday After Thanksgiving Day, Christmas Day, The Day After Christmas, And A Floating Holiday (10).

Holiday Codes Continued

6. T. Paid Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Last Working Day Before Christmas Day, And Christmas Day (9).
- Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (7). If a holiday falls on Saturday, the preceding Friday shall be considered as the holiday. If a holiday falls on Sunday, the following Monday shall be considered as the holiday.
7. A. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any Holiday Which Falls On A Sunday Shall Be Observed As A Holiday On The Following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.
- B. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- C. Holidays: New Year's Day, Martin Luther King Jr. Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- D. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Veteran's Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (8). Unpaid Holidays: President's Day. Any paid holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any paid holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- E. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- F. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the last working day before Christmas day and Christmas day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- G. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, and Christmas Day (6). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.
- H. Holidays: New Year's Day, Martin Luther King Jr. Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- I. Holidays: New Year's Day, President's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Day Before Christmas Day And Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

Holiday Codes Continued

7. J. Holidays: New Year's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day and Christmas Day (6). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- K. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- L. Holidays: New Year's Day, Memorial Day, Labor Day, Independence Day, Thanksgiving Day, the Last Work Day before Christmas Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- N. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. When Christmas falls on a Saturday, the preceding Friday shall be observed as a holiday.
- P. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, And Christmas Day (7). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.
- Q. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. If any of the listed holidays falls on a Saturday, the preceding Friday shall be a regular work day.
- S. Paid Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Friday after Thanksgiving Day, Christmas Day, the Day after Christmas, and A Floating Holiday (9). If any of the listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.
- V. Holidays: New Year's Day, President's Birthday, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, the day before or after Christmas, and the day before or after New Year's Day. If any of the above listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.
- W. Holidays: New Year's Day, Day After New Year's, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Eve Day, Christmas Day, the day after Christmas, the day before New Year's Day, and a Floating Holiday.
- X. Holidays: New Year's Day, Day before or after New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, Christmas Day, and the day before or after Christmas day. If a holiday falls on a Saturday or on a Friday that is the normal day off, then the holiday will be taken on the last normal workday. If the holiday falls on a Monday that is the normal day off or on a Sunday, then the holiday will be taken on the next normal workday.
- Y. Holidays: New Year's Day, Presidents' Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, and Christmas Day. (8) If the holiday falls on a Sunday, then the day observed by the federal government shall be considered a holiday and compensated accordingly.
- Z. Holidays: New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, Christmas Eve, and Christmas Day (9). Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday. Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday.

Holiday Codes Continued

15. G. New Year's Day, Washington's Birthday, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, the last scheduled workday before Christmas, and Christmas Day (9). If any of the listed holidays falls on a Sunday, the day observed by the Nation shall be considered a holiday and compensated accordingly.
- H. Holidays: New Year's Day, Martin Luther King Jr. Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, the Friday after Thanksgiving Day, the Last Working Day before Christmas Day and Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- I. Holidays: New Year's Day, President's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day, The Friday After Thanksgiving Day, The Day Before Christmas Day And Christmas Day (9). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- J. Holidays: New Year's Day, Independence Day, Memorial Day, Labor Day, Thanksgiving Day and Christmas Day (6). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.
- K. Holidays: New Year's Day, Memorial Day, Independence Day, Thanksgiving Day, the Friday and Saturday after Thanksgiving Day, And Christmas Day (8). Any holiday which falls on a Sunday shall be observed as a holiday on the following Monday. Any holiday which falls on a Saturday shall be observed as a holiday on the preceding Friday.

Note Codes

8. D. Workers working with supplied air on hazmat projects receive an additional \$1.00 per hour.
- L. Workers on hazmat projects receive additional hourly premiums as follows -Level A: \$0.75, Level B: \$0.50, And Level C: \$0.25.
- M. Workers on hazmat projects receive additional hourly premiums as follows: Levels A & B: \$1.00, Levels C & D: \$0.50.
- N. Workers on hazmat projects receive additional hourly premiums as follows -Level A: \$1.00, Level B: \$0.75, Level C: \$0.50, And Level D: \$0.25.
- S. Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. This classification is only effective on or after August 31, 2012.
- T. Effective August 31, 2012 – A Traffic Control Laborer performs the setup, maintenance and removal of all temporary traffic control devices and construction signs necessary to control vehicular, bicycle, and pedestrian traffic during construction operations. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. This classification is only effective on or after August 31, 2012.

Note Codes Continued

8. U. Workers on hazmat projects receive additional hourly premiums as follows – Class A Suit: \$2.00, Class B Suit: \$1.50, And Class C Suit: \$1.00. Workers performing underground work receive an additional \$0.40 per hour for any and all work performed underground, including operating, servicing and repairing of equipment. The premium for underground work shall be paid for the entire shift worked. Workers who work suspended by a rope or cable receive an additional \$0.50 per hour. The premium for work suspended shall be paid for the entire shift worked. Workers who do “pioneer” work (break open a cut, build road, etc.) more than one hundred fifty (150) feet above grade elevation receive an additional \$0.50 per hour.
- V. In addition to the hourly wage and fringe benefits, the following depth and enclosure premiums shall be paid. The premiums are to be calculated for the maximum depth and distance into an enclosure that a diver reaches in a day. The premiums are to be paid one time for the day and are not used in calculating overtime pay.
- Depth premiums apply to depths of fifty feet or more. Over 50' to 100' - \$2.00 per foot for each foot over 50 feet. Over 101' to 150' - \$3.00 per foot for each foot over 101 feet. Over 151' to 220' - \$4.00 per foot for each foot over 220 feet. Over 221' - \$5.00 per foot for each foot over 221 feet.
- Enclosure premiums apply when divers enter enclosures (such as pipes or tunnels) where there is no vertical ascent and is measured by the distance travelled from the entrance. 25' to 300' - \$1.00 per foot from entrance. 300' to 600' - \$1.50 per foot beginning at 300'. Over 600' - \$2.00 per foot beginning at 600'.
- W. Meter Installers work on single phase 120/240V self-contained residential meters. The Lineman/Groundmen rates would apply to meters not fitting this description.
- X. Workers on hazmat projects receive additional hourly premiums as follows - Class A Suit: \$2.00, Class B Suit: \$1.50, Class C Suit: \$1.00, and Class D Suit: \$0.50. Special Shift Premium: Basic hourly rate plus \$2.00 per hour.
- When due to conditions beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications requires that work can only be performed outside the normal 5 am to 6pm shift, then the special shift premium will be applied to the basic hourly rate. When an employee works on a special shift, they shall be paid a special shift premium for each hour worked unless they are in OT or Double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)
- Y. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay.
- Swinging Stage/Boatswains Chair: Employees working on a swinging state or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents (\$0.75) per hour above the classification rate.
- Z. Workers working with supplied air on hazmat projects receive an additional \$1.00 per hour.
- Special Shift Premium: Basic hourly rate plus \$2.00 per hour. When due to conditions beyond the control of the Employer or when an owner (not acting as a contractor), a government agency or the contract specifications require that more than (4) hours of a special shift can only be performed outside the normal 6 am to 6pm shift, then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they will be paid a special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

Note Codes Continued

9. A. Workers working with supplied air on hazmat projects receive an additional \$1.00 per hour.

Special Shift Premium: Basic hourly rate plus \$2.00 per hour. When due to conditions beyond the control of the Employer or when an owner (not acting as the contractor), a government agency or the contract specifications require that more than four (4) hours of a special shift can only be performed outside the normal 6 am to 6pm shift, then the special shift premium will be applied to the basic straight time for the entire shift. When an employee works on a special shift, they shall be paid a special shift premium for each hour worked unless they are in overtime or double-time status. (For example, the special shift premium does not waive the overtime requirements for work performed on Saturday or Sunday.)

Certified Crane Operator Premium: Crane operators requiring certifications shall be paid \$0.50 per hour above their classification rate.

Boom Pay Premium: All cranes including tower shall be paid as follows based on boom length:

(A) – 130' to 199' – \$0.50 per hour over their classification rate.

(B) – 200' to 299' – \$0.80 per hour over their classification rate.

(C) – 300' and over – \$1.00 per hour over their classification rate.

- B. The highest pressure registered on the gauge for an accumulated time of more than fifteen (15) minutes during the shift shall be used in determining the scale paid.

Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents (\$0.75) per hour above the classification rate.

- C. Tide Work: When employees are called out between the hours of 6:00 p.m. and 6:00 a.m. to work on tide work (work located in the tide plane) all time worked shall be at one and one-half times the hourly rate of pay. Swinging Stage/Boatswains Chair: Employees working on a swinging stage or boatswains chair or under conditions that require them to be tied off to allow their hands to be free shall receive seventy-five cents (\$0.75) per hour above the classification rate.

Effective August 31, 2012 – A Traffic Control Supervisor shall be present on the project whenever flagging or spotting or other traffic control labor is being utilized. A Traffic Control Laborer performs the setup, maintenance and removal of all temporary traffic control devices and construction signs necessary to control vehicular, bicycle, and pedestrian traffic during construction operations. Flaggers and Spotters shall be posted where shown on approved Traffic Control Plans or where directed by the Engineer. All flaggers and spotters shall possess a current flagging card issued by the State of Washington, Oregon, Montana, or Idaho. These classifications are only effective on or after August 31, 2012.

- D. Industrial Painter wages are required for painting within industrial facilities such as treatment plants, pipelines, towers, dams, bridges, power generation facilities and manufacturing facilities such as chemical plants, etc., or anywhere abrasive blasting is necessary to prepare surfaces, or hazardous materials encapsulation is required.
- E. Heavy Construction includes construction, repair, alteration or additions to the production, fabrication or manufacturing portions of industrial or manufacturing plants, hydroelectric or nuclear power plants and atomic reactor construction. Workers on hazmat projects receive additional hourly premiums as follows -Level A: \$1.00, Level B: \$0.75, Level C: \$0.50, And Level D: \$0.25.
- F. Industrial Painter wages are required for painting within industrial facilities such as treatment plants, pipelines, towers, dams, power generation facilities and manufacturing facilities such as chemical plants, etc., or anywhere abrasive blasting is necessary to prepare surfaces, or hazardous materials encapsulation is required.

Note Codes Continued

9. H. One (1) person crew shall consist of a Party Chief. (Total Station or similar one (1) person survey system). Two (2) person survey party shall consist of at least a Party Chief and a Chain Person. Three (3) person survey party shall consist of at least a Party Chief, an Instrument Person, and a Chain Person.

Washington State Department of Labor and Industries
Policy Statement
(Regarding the Production of "Standard" or "Non-standard" Items)

Below is the department's (State L&I's) list of criteria to be used in determining whether a prefabricated item is "standard" or "non-standard". For items not appearing on WSDOT's predetermined list, these criteria shall be used by the Contractor (and the Contractor's subcontractors, agents to subcontractors, suppliers, manufacturers, and fabricators) to determine coverage under RCW 39.12. The production, in the State of Washington, of non-standard items is covered by RCW 39.12, and the production of standard items is not. The production of any item outside the State of Washington is not covered by RCW 39.12.

1. Is the item fabricated for a public works project? If not, it is not subject to RCW 39.12. If it is, go to question 2.
2. Is the item fabricated on the public works jobsite? If it is, the work is covered under RCW 39.12. If not, go to question 3.
3. Is the item fabricated in an assembly/fabrication plant set up for, and dedicated primarily to, the public works project? If it is, the work is covered by RCW 39.12. If not, go to question 4.
4. Does the item require any assembly, cutting, modification or other fabrication by the supplier? If not, the work is not covered by RCW 39.12. If yes, go to question 5.
5. Is the prefabricated item intended for the public works project typically an inventory item which could reasonably be sold on the general market? If not, the work is covered by RCW 39.12. If yes, go to question 6.
6. Does the specific prefabricated item, generally defined as standard, have any unusual characteristics such as shape, type of material, strength requirements, finish, etc? If yes, the work is covered under RCW 39.12.

Any firm with questions regarding the policy, WSDOT's Predetermined List, or for determinations of covered and non-covered workers shall be directed to State L&I at (360) 902-5330.

**WSDOT's
Predetermined List for
Suppliers - Manufactures - Fabricator**

Below is a list of potentially prefabricated items, originally furnished by WSDOT to Washington State Department of Labor and Industries, that may be considered non-standard and therefore covered by the prevailing wage law, RCW 39.12. Items marked with an X in the "YES" column should be considered to be non-standard and therefore covered by RCW 39.12. Items marked with an X in the "NO" column should be considered to be standard and therefore not covered. Of course, exceptions to this general list may occur, and in that case shall be evaluated according to the criteria described in State and L&I's policy statement.

ITEM DESCRIPTION	YES	NO
1. Metal rectangular frames, solid metal covers, herringbone grates, and bi-directional vaned grates for Catch Basin Types 1, 1L, 1P, and 2 and Concrete Inlets. See Std. Plans		X
2. Metal circular frames (rings) and covers, circular grates, and prefabricated ladders for Manhole Types 1, 2, and 3, Drywell Types 1, 2, and 3 and Catch Basin Type 2. See Std. Plans		X
3. Prefabricated steel grate supports and welded grates, metal frames and dual vaned grates, and Type 1, 2, and 3 structural tubing grates for Drop Inlets. See Std. Plans.		X
4. Concrete Pipe - Plain Concrete pipe and reinforced concrete pipe Class 2 to 5 sizes smaller than 60 inch diameter.		X
5. Concrete Pipe - Plain Concrete pipe and reinforced concrete pipe Class 2 to 5 sizes larger than 60 inch diameter.		X
6. Corrugated Steel Pipe - Steel lock seam corrugated pipe for culverts and storm sewers, sizes 30 inch to 120 inches in diameter. May also be treated, 1 thru 5.		X
7. Corrugated Aluminum Pipe - Aluminum lock seam corrugated pipe for culverts and storm sewers, sizes 30 inch to 120 inches in diameter. May also be treated, #5.		X

ITEM DESCRIPTION	YES	NO
8. Anchor Bolts & Nuts - Anchor Bolts and Nuts, for mounting sign structures, luminaries and other items, shall be made from commercial bolt stock. See Contract Plans and Std. Plans for size and material type.		X
9. Aluminum Pedestrian Handrail - Pedestrian handrail conforming to the type and material specifications set forth in the contract plans. Welding of aluminum shall be in accordance with Section 9-28.14(3).	X	
10. Major Structural Steel Fabrication - Fabrication of major steel items such as trusses, beams, girders, etc., for bridges.	X	
11. Minor Structural Steel Fabrication - Fabrication of minor steel Items such as special hangers, brackets, access doors for structures, access ladders for irrigation boxes, bridge expansion joint systems, etc., involving welding, cutting, punching and/or boring of holes. See Contact Plans for item description and shop drawings.	X	
12. Aluminum Bridge Railing Type BP - Metal bridge railing conforming to the type and material specifications set forth in the Contract Plans. Welding of aluminum shall be in accordance with Section 9-28.14(3).		X
13. Concrete Piling--Precast-Prestressed concrete piling for use as 55 and 70 ton concrete piling. Concrete to conform to Section 9-19.1 of Std. Spec..	X	
14. Precast Manhole Types 1, 2, and 3 with cones, adjustment sections and flat top slabs. See Std. Plans.		X
15. Precast Drywell Types 1, 2, and with cones and adjustment Sections. See Std. Plans.		X
16. Precast Catch Basin - Catch Basin type 1, 1L, 1P, and 2 With adjustment sections. See Std. Plans.		X

ITEM DESCRIPTION	YES	NO
17. Precast Concrete Inlet - with adjustment sections, See Std. Plans		X
18. Precast Drop Inlet Type 1 and 2 with metal grate supports. See Std. Plans.		X
19. Precast Grate Inlet Type 2 with extension and top units. See Std. Plans		X
20. Metal frames, vaned grates, and hoods for Combination Inlets. See Std. Plans		X
21. Precast Concrete Utility Vaults - Precast Concrete utility vaults of various sizes. Used for in ground storage of utility facilities and controls. See Contract Plans for size and construction requirements. Shop drawings are to be provided for approval prior to casting		X
22. Vault Risers - For use with Valve Vaults and Utilities X Vaults.		X
23. Valve Vault - For use with underground utilities. See Contract Plans for details.		X
24. Precast Concrete Barrier - Precast Concrete Barrier for use as new barrier or may also be used as Temporary Concrete Barrier. Only new state approved barrier may be used as permanent barrier.		X
25. Reinforced Earth Wall Panels – Reinforced Earth Wall Panels in size and shape as shown in the Plans. Fabrication plant has annual approval for methods and materials to be used. See Shop Drawing. Fabrication at other locations may be approved, after facilities inspection, contact HQ. Lab.	X	
26. Precast Concrete Walls - Precast Concrete Walls - tilt-up wall panel in size and shape as shown in Plans. Fabrication plant has annual approval for methods and materials to be used	X	

ITEM DESCRIPTION	YES	NO
27. Precast Railroad Crossings - Concrete Crossing Structure Slabs.	X	
28. 12, 18 and 26 inch Standard Precast Prestressed Girder – Standard Precast Prestressed Girder for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
29. Prestressed Concrete Girder Series 4-14 - Prestressed Concrete Girders for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
30. Prestressed Tri-Beam Girder - Prestressed Tri-Beam Girders for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
31. Prestressed Precast Hollow-Core Slab – Precast Prestressed Hollow-core slab for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A.	X	
32. Prestressed-Bulb Tee Girder - Bulb Tee Prestressed Girder for use in structures. Fabricator plant has annual approval of methods and materials to be used. Shop Drawing to be provided for approval prior to casting girders. See Std. Spec. Section 6-02.3(25)A	X	
33. Monument Case and Cover See Std. Plan.		X

ITEM DESCRIPTION	YES	NO
34. Cantilever Sign Structure - Cantilever Sign Structure fabricated from steel tubing meeting AASHTO-M-183. See Std. Plans, and Contract Plans for details. The steel structure shall be galvanized after fabrication in accordance with AASHTO-M-111.	X	
35. Mono-tube Sign Structures - Mono-tube Sign Bridge fabricated to details shown in the Plans. Shop drawings for approval are required prior to fabrication.	X	
36. Steel Sign Bridges - Steel Sign Bridges fabricated from steel tubing meeting AASHTO-M-138 for Aluminum Alloys. See Std. Plans, and Contract Plans for details. The steel structure shall be galvanized after fabrication in accordance with AASHTO-M-111.	X	
37. Steel Sign Post - Fabricated Steel Sign Posts as detailed in Std Plans. Shop drawings for approval are to be provided prior to fabrication		X
38. Light Standard-Prestressed - Spun, prestressed, hollow concrete poles.	X	
39. Light Standards - Lighting Standards for use on highway illumination systems, poles to be fabricated to conform with methods and materials as specified on Std. Plans. See Special Provisions for pre-approved drawings.	X	
40. Traffic Signal Standards - Traffic Signal Standards for use on highway and/or street signal systems. Standards to be fabricated to conform with methods and material as specified on Std. Plans. See Special Provisions for pre-approved drawings	X	
41. Precast Concrete Sloped Mountable Curb (Single and DualFaced) See Std. Plans.		X

ITEM DESCRIPTION	YES	NO
42. Traffic Signs - Prior to approval of a Fabricator of Traffic Signs, the sources of the following materials must be submitted and approved for reflective sheeting, legend material, and aluminum sheeting. NOTE: *** Fabrication inspection required. Only signs tagged "Fabrication Approved" by WSDOT Sign Fabrication Inspector to be installed	X	X
	Custom Message	Std Signing Message
43. Cutting & bending reinforcing steel		X
44. Guardrail components	X	X
	Custom End Sec	Standard Sec
45. Aggregates/Concrete mixes	Covered by WAC 296-127-018	
46. Asphalt	Covered by WAC 296-127-018	
47. Fiber fabrics		X
48. Electrical wiring/components		X
49. treated or untreated timber pile		X
50. Girder pads (elastomeric bearing)	X	
51. Standard Dimension lumber		X
52. Irrigation components		X

ITEM DESCRIPTION	YES	NO
53. Fencing materials		X
54. Guide Posts		X
55. Traffic Buttons		X
56. Epoxy		X
57. Cribbing		X
58. Water distribution materials		X
59. Steel "H" piles		X
60. Steel pipe for concrete pile casings		X
61. Steel pile tips, standard		X
62. Steel pile tips, custom	X	

Prefabricated items specifically produced for public works projects that are prefabricated in a county other than the county wherein the public works project is to be completed, the wage for the offsite prefabrication shall be the applicable prevailing wage for the county in which the actual prefabrication takes place.

It is the manufacturer of the prefabricated product to verify that the correct county wage rates are applied to work they perform.

See RCW [39.12.010](#)

(The definition of "locality" in RCW [39.12.010](#)(2) contains the phrase "wherein the physical work is being performed." The department interprets this phrase to mean the actual work site.

WSDOT's List of State Occupations not applicable to Heavy and Highway Construction Projects

This project is subject to the state hourly minimum rates for wages and fringe benefits in the contract provisions, as provided by the state Department of Labor and Industries.

The following list of occupations, is comprised of those occupations that are not normally used in the construction of heavy and highway projects.

When considering job classifications for use and / or payment when bidding on, or building heavy and highway construction projects for, or administered by WSDOT, these Occupations will be excepted from the included "Washington State Prevailing Wage Rates For Public Work Contracts" documents.

- Building Service Employees
- Electrical Fixture Maintenance Workers
- Electricians - Motor Shop
- Heating Equipment Mechanics
- Industrial Engine and Machine Mechanics
- Industrial Power Vacuum Cleaners
- Inspection, Cleaning, Sealing of Water Systems by Remote Control
- Laborers - Underground Sewer & Water
- Machinists (Hydroelectric Site Work)
- Modular Buildings
- Playground & Park Equipment Installers
- Power Equipment Operators - Underground Sewer & Water
- Residential *** ALL ASSOCIATED RATES ***
- Sign Makers and Installers (Non-Electrical)
- Sign Makers and Installers (Electrical)
- Stage Rigging Mechanics (Non Structural)

The following occupations may be used only as outlined in the preceding text concerning "WSDOT's list for Suppliers - Manufacturers - Fabricators"

- Fabricated Precast Concrete Products
- Metal Fabrication (In Shop)

Definitions for the Scope of Work for prevailing wages may be found at the Washington State Department of Labor and Industries web site and in WAC Chapter 296-127.

Washington State Department of Labor and Industries
Policy Statements
(Regarding Production and Delivery of Gravel, Concrete, Asphalt, etc.)

WAC 296-127-018 Agency filings affecting this section

Coverage and exemptions of workers involved in the production and delivery of gravel, concrete, asphalt, or similar materials.

(1) The materials covered under this section include but are not limited to: Sand, gravel, crushed rock, concrete, asphalt, or other similar materials.

(2) All workers, regardless of by whom employed, are subject to the provisions of chapter 39.12 RCW when they perform any or all of the following functions:

(a) They deliver or discharge any of the above-listed materials to a public works project site:

(i) At one or more point(s) directly upon the location where the material will be incorporated into the project; or

(ii) At multiple points at the project; or

(iii) Adjacent to the location and coordinated with the incorporation of those materials.

(b) They wait at or near a public works project site to perform any tasks subject to this section of the rule.

(c) They remove any materials from a public works construction site pursuant to contract requirements or specifications (e.g., excavated materials, materials from demolished structures, clean-up materials, etc.).

(d) They work in a materials production facility (e.g., batch plant, borrow pit, rock quarry, etc.,) which is established for a public works project for the specific, but not necessarily exclusive, purpose of supplying materials for the project.

(e) They deliver concrete to a public works site regardless of the method of incorporation.

(f) They assist or participate in the incorporation of any materials into the public works project.

(3) All travel time that relates to the work covered under subsection (2) of this section requires the payment of prevailing wages. Travel time includes time spent waiting to load, loading, transporting, waiting to unload, and delivering materials. Travel time would include all time spent in travel in support of a public works project whether the vehicle is empty or full. For example, travel time spent returning to a supply source to obtain another load of material for use on a public works site or returning to the public works site to obtain another load of excavated material is time spent in travel that is subject to prevailing wage. Travel to a supply source, including travel from a public works site, to obtain materials for use on a private project would not be travel subject to the prevailing wage.

(4) Workers are not subject to the provisions of chapter 39.12 RCW when they deliver materials to a stockpile.

(a) A "stockpile" is defined as materials delivered to a pile located away from the site of incorporation such that the stockpiled materials must be physically moved from the stockpile and transported to another location on the project site in order to be incorporated into the project.

(b) A stockpile does not include any of the functions described in subsection (2)(a) through (f) of this section; nor does a stockpile include materials delivered or distributed to multiple locations upon the project site; nor does a stockpile include materials dumped at the place of incorporation, or adjacent to the location and coordinated with the incorporation.

(5) The applicable prevailing wage rate shall be determined by the locality in which the work is performed. Workers subject to subsection (2)(d) of this section, who produce such materials at an off-site facility shall be paid the applicable prevailing wage rates for the county in which the off-site facility is located. Workers subject to subsection (2) of this section, who deliver such materials to a public works project site shall be paid the applicable prevailing wage rates for the county in which the public works project is located.

[Statutory Authority: Chapter 39.12 RCW, RCW 43.22.051 and 43.22.270. 08-24-101, § 296-127-018, filed 12/2/08, effective 1/2/09. Statutory Authority: Chapters 39.04 and 39.12 RCW and RCW 43.22.270. 92-01-104 and 92-08-101, § 296-127-018, filed 12/18/91 and 4/1/92, effective 8/31/92.]

APPENDICES

The following appendices are hereby provided and are made a part of the Contract Documents. The Contractor shall perform all work in accordance with the plans and specifications subject to the requirements and conditions contained within the Appendices.

- Appendix A – Pavement Overlay Tonnages / Locations**
- Appendix B – WSDOT Work Zone Traffic Control Standard Plans**

APPENDIX A

Pavement Overlay Tonnages / Locations

OVERLAY - PRELIMINARY INVENTORY

For the year of: 2023

6th Draft - Final

AREA KALAMA	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	COUNT OF:			LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
							MANHOLE	H2O	MONUMENT						
KAL	1	CHINA GARDEN(34300)	1.88	1.98	B	24	0.13				528	125.4			
KAL	2	CHINA GARDEN(34300)	2.43	2.48	L	12	0.13				264	31.3			
KAL	3	CHINA GARDEN(34300)	2.48	2.68	B	24	0.13				1056	250.8	407.5		
KAL	4	CLOVERDALE RD(32990)	1.09	1.13	B	26	0.13		1		211	54.3	54.3		city kalama to replace WV lid
KAL	5	OLD PACIFIC HWY(33950)	1.21	1.30	B	30	0.13		4	1	475	143.2	143.2		
KAL	6	KALAMA RIVER RD(40000)	1.13	1.21	B	28	0.13				422	117.0			
KAL	7	KALAMA RIVER RD(40000)	1.32	1.49	B	26	0.13				898	230.9			3- brass disk mon's.
KAL	8	KALAMA RIVER RD(40000)	1.56	1.60	B	25	0.13				211	52.2			
KAL	9	KALAMA RIVER RD(40000)	2.56	2.65	R	13	0.13				475	61.1			1-brass disk mon.
KAL	10	KALAMA RIVER RD(40000)	2.65	2.67	B	26	0.13				106	27.2			1-brass disk mon.
KAL	11	KALAMA RIVER RD(40000)	5.55	5.59	R	15	0.13				211	31.3			
KAL	12	KALAMA RIVER RD(40000)	6.03	6.06	B	26	0.13				158	40.7			
KAL	13	KALAMA RIVER RD(40000)	7.45	7.49	B	28	0.13				211	58.5			
KAL	14	KALAMA RIVER RD(40000)	7.53	7.56	R	14	0.13				158	21.9			
KAL	15	KALAMA RIVER RD(40000)	7.74	7.95	B	27	0.13				1109	296.2			
KAL	16	KALAMA RIVER RD(40000)	8.14	8.19	R	14	0.13				264	36.6			
KAL	17	KALAMA RIVER RD(40000)	8.24	8.36	B	26	0.13				634	163.0			
KAL	18	KALAMA RIVER RD(40000)	8.57	8.67	B	27	0.13				528	141.1			
KAL	19	KALAMA RIVER RD(40000)	9.01	9.05	L	13	0.13				211	27.2			
KAL	20	KALAMA RIVER RD(40000)	9.05	9.09	B	26	0.13				211	54.3	1359.2		
KAL	21	NORTH HENDRICKSON DR (34652)	0.00	0.07	B	35	0.13				370	128.0			
KAL	22	NORTH HENDRICKSON DR (34652)	0.15	0.22	B	35	0.13				370	128.0			
KAL	23	NORTH HENDRICKSON DR (34652)					0.13					3.7	259.7		Intersection qnty at West Kalama River Rd.
								-	5	1	9,082	2,223.9	2,223.9	-	

OVERLAY - PRELIMINARY INVENTORY

For the year of:

2023

6th Draft - Final

AREA KELSO	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	MANHOLE	H2O	MONUMENT	LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
KEL	1	OLD 99 (41000)	1.57	1.61	B	28	0.13				211	58.5			
KEL	2	OLD 99 (41000)	1.74	1.80	B	29	0.13			1	317	90.9			
KEL	3	OLD 99 (41000)	2.42	2.53	B	27	0.13				581	155.2			
KEL	4	OLD 99 (41000)	2.67	2.78	B	30	0.13				581	172.4			
KEL	5	OLD 99 (41000)	2.78	2.84	R	16	0.13				317	50.2			
KEL	6	OLD 99 (41000)	2.84	2.90	B	30	0.13			1	317	94.0			
KEL	7	OLD 99 (41000)	3.09	3.25	L	14	0.13				845	117.0			
KEL	8	OLD 99 (41000)	4.06	4.25	L	16	0.13				1003	154.8	893.0		
KEL	9	ROSE VALLEY RD (40110)	0.48	0.80	L	17	0.13				1690	284.2			
KEL	10	ROSE VALLEY RD (40110)	2.74	2.83	B	28	0.13				475	131.7			
KEL	11	ROSE VALLEY RD (40110)	3.07	3.43	B	28	0.13				1901	526.6			
KEL	12	ROSE VALLEY RD (40110)	3.65	3.72	L	15	0.13				370	54.9			
KEL	13	ROSE VALLEY RD (40110)	4.05	4.18	L	14	0.13				686	95.1			
KEL	14	ROSE VALLEY RD (40110)	5.09	5.15	L	14	0.13				317	43.9			
KEL	15	ROSE VALLEY RD (40110)	5.15	5.20	B	28	0.13				264	73.1			
KEL	16	ROSE VALLEY RD(40110)	5.65	5.71	L	14	0.13				317	43.9			Grind at Bridge deck by Co.
KEL	17	ROSE VALLEY RD (40110)	5.76	5.94	B	26	0.13				950	244.5			
KEL	18	ROSE VALLEY RD (40110)	8.09	8.20	L	13	0.13				581	74.7			
KEL	19	ROSE VALLEY RD(40110)	8.20	8.26	B	26	0.13				317	81.5	1654.1		
- - 2 12,038 2,547.1 2,547.1 -															

OVERLAY - PRELIMINARY INVENTORY

For the year of:

2023

6th Draft - Final

AREA LONGVIEW	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	MANHOLE	COUNT OF: H2O	MONUMENT	LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
LV	1	Lexington Bridge Dr (19505)	0.01	0.17	B	39	0.13	7	2		845	415.9		4667.4	HMA and Grind quantities calculated from aerial photo.
LV	2	Lexington Bridge Dr (19505)	0.29	0.33	B	52	0.13			1	211	104.3		1170.6	HMA and Grind quantities calculated from aerial photo.
LV	3	Lexington Bridge Dr (19505)	0.39	0.46	B	52	0.13			1	370	178.1	698.3	1999.0	HMA and Grind quantities calculated from aerial photo.
LV	4	Nevada Drive (13860)	0.00	0.03	B	28	0.13			1	158	43.9		491.6	mon w/o Lid- OK
LV	5	Nevada Drive (13860)	0.00	0.03			0.13				158	7.7		86.4	Intersection at Col. Hts. Rd.
LV	6	Nevada Drive (13860)	0.03	0.05	B	26	0.13				106	27.2		306.2	
LV	7	Nevada Drive (13860)	0.11	0.53	R	13	0.13		9	2	2212	282.4	361.2	3195.0	
LV	8	Columbia Heights (11400)	1.73	1.86	B	29	0.13		1	1	686	197.0		2210.4	pd Laurel Rd 1.70. - Mon w/o lid
LV	9	Columbia Heights (11400)	2.04	2.06	B	30	0.13				106	31.3			
LV	10	Columbia Heights (11400)	2.06	2.11	B	44	0.13		3		264	114.9			width avg'd to 44.
LV	11	Columbia Heights (11400)	2.20	2.27	R	13	0.13				370	47.5	390.7	381.3	
LV	12	Pacific Way (11000)	1.52	1.56	B	42	0.13		1		211	87.8			pd city limits 1.52
LV	13	Pacific Way (11000)	3.25	3.38	B	39	0.13	4			686	264.9			
LV	14	Pacific Way (11000)	3.56	3.65	L	19	0.13				475	87.0			
LV	15	Pacific Way (11000)	3.65	3.82	B	37	0.13				898	328.6	768.3		
LV	16	Willow Grove (10100)	0.24	0.29	B	35	0.13				264	91.4			
LV	17	Willow Grove (10100)	0.29	0.41	L	20	0.13				634	125.4			
LV	18	Willow Grove (10100)	0.53	0.59	B	35	0.13			1	317	109.7			
LV	19	Willow Grove (10100)	0.93	0.99	B	30	0.13				317	94.0	420.5		
LV	20	West Port Way (10270)	0.13	0.47	B	36	0.13			4	1795	639.5	639.5		
									11	16	11	11,083	3,278.5	3,278.5	14,507.9

OVERLAY - PRELIMINARY INVENTORY

For the year of: 2023

6th Draft - Final

AREA CASTLE ROCK	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	MANHOLE	H2O	MONUMENT	LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
CR	1	S. TOUTLE (51700)	1.52	1.89	B	32	0.13			1	1954	618.6			
CR	2		6.32	6.60	B	26	0.13				1478	380.3	998.9		
CR	3	TOWER (51200)	4.11	4.32	B	24	0.13				1109	263.3	263.3		
CR	4	LUEBKE (59300)	0.04	0.34	B	24	0.13			1	1584	376.1			.08 MONUMENT
CR	5		0.68	1.03	B	21	0.13				1848	384.0	760.1		
CR	6	HEADQUARTERS (50700)	0.00	0.08	B	38	0.13			1	422	158.8			.05 MONUMENT (18' Grind)
CR	7											23.0			Intersection
CR	8		0.16	0.42	B	42	0.17			4	1373	746.0			.19,.25,.37,.42 MONUMENT
CR	9		0.54	0.82	B	26	0.17	1		7	1478	497.4			.57,.67,.71,.75,.79,.81MONUMENT/.61 MANHOLE. - 1 mon lid broke
CR	10		2.74	2.97	B	26	0.17		1		1214	408.5			H2O= 1 leachate ARV, 400+/- past fircrest
CR	11		3.24	3.30	B	26	0.17				317	106.6	1940.3		
CR	12	S. SILVERLAKE (55440)	3.92	4.51	B	25	0.17		1	3	3115	1007.7	1007.7		
								1	2	17	15,893	4,970.3	4,970.3	-	

OVERLAY - PRELIMINARY INVENTORY

For the year of: 2023

6th Draft - Final

CITY OF WOODLAND	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	MANHOLE	COUNT OF: H20	MONUMENT	LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
WOODLAND	1	Willow St.			B	39	0.13	4	5		727	280.5		3107.0	
WOODLAND	2	Willow St. (Intersections/returns)					0.13				0	14.9	295.4	164.0	includes curb returns and 24' into maple st.
WOODLAND	3										0	0.0			
WOODLAND	4	Pine St 1 (south of willow)			B	39	0.13	8	7	1	651	251.2		2821.0	includes projection across Hawthorne
WOODLAND	5	Pine St 1 (south of willow) Inter/returns					0.13				0	33.3	284.5	372.0	Incudes curb returns, 20' into Ponderosa, 2-20' strip at Hawthorne.
WOODLAND	6										0	0.0			
WOODLAND	7	Pine St 2 (north of willow)			B	39	0.13	2	2		374	144.3		1620.7	
WOODLAND	8	Pine St 2 (north of willow) returns					0.13				0	4.0	148.3	44.0	
WOODLAND	9										0	0.0			
								14	14	1	1,752	728.2	728.2	8,128.7	

OVERLAY - PRELIMINARY INVENTORY

For the year of: 2023

6th Draft - Final

CITY OF CASTLE ROCK	#	ROAD NAME	BEG MP	END MP	LANE (R-L-B)	LANE WIDTH FT.	DEPTH FT. (.13-.17)	MANHOLE	H2O	MONUMENT	LINEAL FT.	ASPHALT TONNAGE	ROAD TOTAL	GRIND AREA (SY)	COMMENTS
CASTLE ROCK	1	900 Blk 1st Ave SW			B	18	0.17				155	36.1			
CASTLE ROCK	2	900 Blk 1st Ave SW - wide spots			B	6	0.17				102	7.9	44.0		
CASTLE ROCK	3										0	0.0			
CASTLE ROCK	4	Alley - Btw Hunt. Ave S & Kirby Ave SE			B	17	0.17	1			245	53.9			width averaged. From Cowlitz St SE to B St SE
CASTLE ROCK	5										0	0.0			
CASTLE ROCK	6	Portions of Riverfront Trail:									0	0.0			
CASTLE ROCK	7	At North End of Lions Pride Park			B	9	0.17				20	2.3			
CASTLE ROCK	8	Btw. Skate and Bike Park along Dike Dr SW			B	10	0.13				150	14.8			
CASTLE ROCK	9	Btw. Skate and Bike Park along Dike Dr SW			B	10	0.13				81	8.0			
CASTLE ROCK	10	Btw. Skate and Bike Park along Dike Dr SW			B	10	0.13				50	4.9			
CASTLE ROCK	11										0	0.0			
								1	-	-	803	127.9	44.0	-	

OVERLAY - FINAL INVENTORY

For the year of: 2023

AREA	TOTAL COUNT OF:			TOTAL ASPHALT TONNAGE	TOTAL GRIND AREA (SY)	COMMENTS
	MANHOLES	H2O VALVES	MONUMENTS			
KELSO	-	-	2	2,547.1	-	
KALAMA	-	5	1	2,223.9	-	
LONGVIEW	11	16	11	3,278.5	14,507.9	
C.ROCK	1	2	17	4,970.3	-	
COUNTY TOTAL	12	23	31	13,019.8	14,507.9	
CITY OF WOODLAND	14	14	1	728.2	8,128.7	
CITY OF CASTLE ROCK	1	-	-	127.9	-	
TOTAL PROJECT	27	37	32	13,876	22,637	


APPENDIX B

WSDOT Work Zone Traffic Control Standard Plans

BUFFER DATA										
LONGITUDINAL BUFFER SPACE = B										
SPEED (MPH)	25	30	35	40	45	50	55	60	65	70
LENGTH (feet)	155	200	250	305	360	425	495	570	645	730
TRANSPORTABLE ATTENUATOR ROLL AHEAD DISTANCE = R										
HOST VEHICLE WEIGHT 9,900 TO 22,000 lbs.					HOST VEHICLE WEIGHT > 22,000 lbs.					
< 45 MPH	45-55 MPH	> 55 MPH		< 45 MPH	45-55 MPH	> 55 MPH				
100'	123'	172'		74'	100'	150'				
PROTECTIVE VEHICLE (WORK VEHICLE) = R										
NO SPECIFIED DISTANCE REQUIRED										

SIGN SPACING = X (1)		
RURAL HIGHWAYS	60 / 65 MPH	800'±
RURAL ROADS	45 / 55 MPH	500'±
RURAL ROADS & URBAN ARTERIALS	35 / 40 MPH	350'±
RURAL ROADS, URBAN ARTERIALS, RESIDENTIAL & BUSINESS DISTRICTS	25 / 30 MPH	200'± (2)
URBAN STREETS	25 MPH OR LESS	100'± (2)

(1) ALL SPACING MAY BE ADJUSTED TO ACCOMMODATE INTERSECTIONS AND DRIVEWAYS.
(2) THIS SPACING MAY BE REDUCED IN URBAN AREAS TO FIT ROADWAY CONDITIONS.

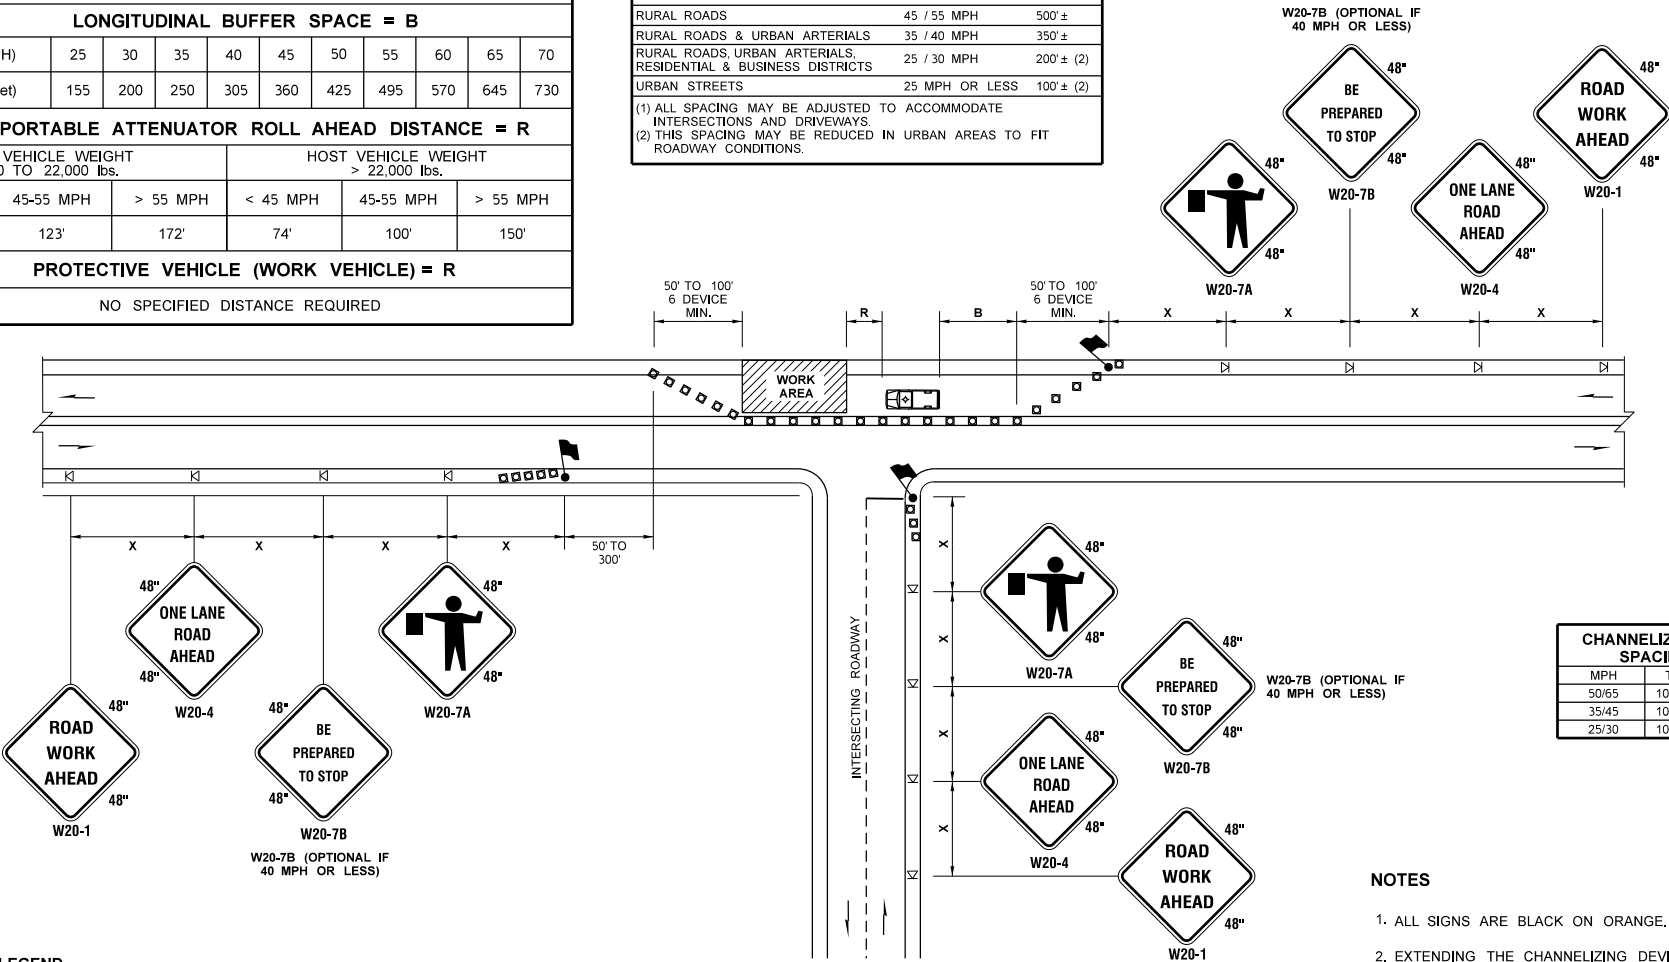


ONE-LANE, TWO-WAY TRAFFIC CONTROL WITH FLAGGERS

NOT TO SCALE

FILE NAME S:\Design R P& S\4-Standards\2-Plan Sheet Library\01-Published PSL(TC) Work Zone Traffic Control\TC-1) One Lane, Two Way Traffic Control with Flaggers\TC-1.dgn										Plot 1
TIME 3:05:14 PM										PLAN REF NO
DATE 1/2/2018										TC1
PLOTTED BY lldelf										SHEET
DESIGNED BY										OF
ENTERED BY										SHEETS
CHECKED BY										
PROJ. ENGR.										
REGIONAL ADM.										
REVISION										
DATE										
BY										
FED.AID PROJ.NO.										
WASH										
JOB NUMBER										
CONTRACT NO.										
LOCATION NO.										
DATE										
P.E. STAMP BOX										
DATE										
P.E. STAMP BOX										
Washington State Department of Transportation										
TRAFFIC CONTROL PLAN										

MINIMUM TAPER LENGTH = L (feet)										
LANE WIDTH (feet)	Posted Speed (mph)									
	25	30	35	40	45	50	55	60	65	70
10	105	150	205	270	450	500	550	-	-	-
11	115	165	225	295	495	550	605	660	-	-
12	125	180	245	320	540	600	660	720	780	-

CHANNELIZATION DEVICE SPACING (feet)		
MPH	TAPER	TANGENT
50/65	40	80
35/45	30	60
25/30	20	40

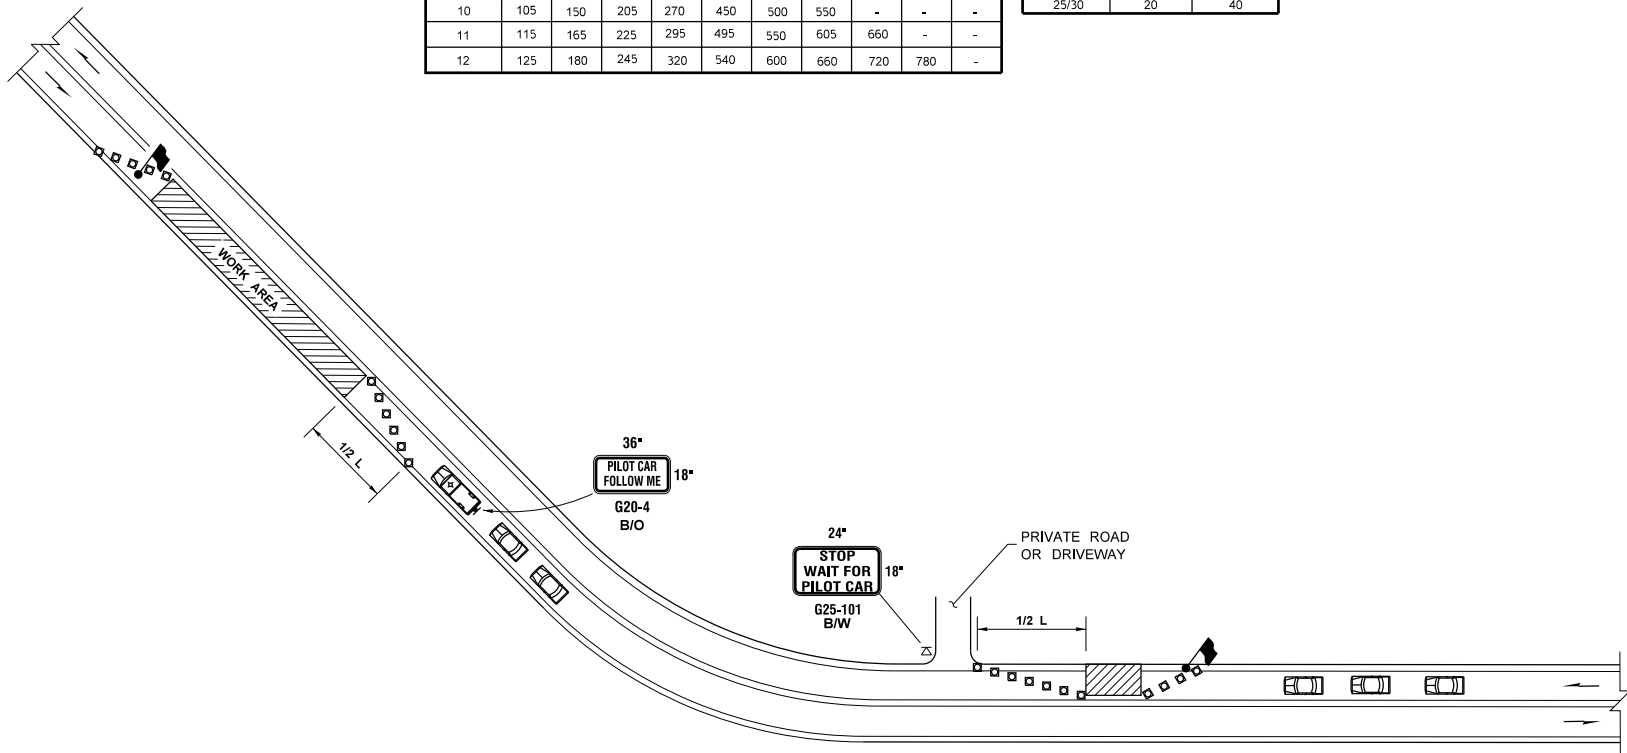

- LEGEND**
- FLAGGING STATION
 - TEMPORARY SIGN LOCATION
 - CHANNELIZING DEVICES
 - PILOT VEHICLE
 - MOTORIST VEHICLE

- NOTES**
- REFER TO SHEET TC1 FOR ADDITIONAL SIGNING AND FLAGGING DETAILS NOT SHOWN.
 - CHANNELIZING DEVICES ARE RECOMMENDED ALONG CENTERLINE TO SEPARATE TRAFFIC FROM WORK OPERATION. DEVICES ARE REQUIRED AT TAPERS TO SHIFT TRAFFIC MOVEMENT BETWEEN LANES AND TO PROTECT FLAGGING STATIONS.
 - SIGN G25-101 IS RECOMMENDED FOR NON-STOP SIGN CONTROLLED APPROACHES SUCH AS PRIVATE ROADS AND DRIVEWAYS. THIS SIGN IS NOT REQUIRED TO BE ALUMINUM SUBSTRATE AND CAN BE MADE OF ALTERNATIVE MATERIALS.

PILOT CAR OPERATION

NOT TO SCALE

FILE NAME S:\Design R P& S\4-Standards\2-Plan Sheet Library\01-Published PSL(TC) Work Zone Traffic Control(TC-2) Pilot Car Operation(TC-2.dgn				REGION NO. STATE WASH		FED.AID PROJ.NO.		Plot 1	
TIME 11:53:53 AM				DATE 1/2/2018		JOB NUMBER		PLAN REF NO TC2	
PLOTTED BY lldelf				CONTRACT NO.		LOCATION NO.		SHEET	
DESIGNED BY								OF	
ENTERED BY								SHEETS	
CHECKED BY									
PROJ. ENGR.									
REGIONAL ADM.				REVISION		DATE BY		TRAFFIC CONTROL PLAN	

Washington State
Department of Transportation

P.E. STAMP BOX DATE

P.E. STAMP BOX DATE

**ATTENTION PROPERTY OWNERS
AND
CONTRACTORS**



**CALL BEFORE
YOU DIG
1-800-424-5555**

The Cowlitz County Utility Coordination Council is comprised of local utilities whose common purpose is to help prevent accidents and damages to their underground facilities. ONE TELEPHONE CALL, 1-800-424-5555, two (2) working days prior to digging will relay a message to these utilities. On the next page is a listing of utilities and entities belonging to the Council.

Forty-eight (48) hours' notice (excluding weekends and holidays) is requested to permit our locators to mark our facilities for you. ONE CALL answering service is available twenty-four (24) hours a day, seven (7) days a week. All calls are recorded. (EMERGENCY LINE LOCATES ARE AVAILABLE AT ALL TIMES).

RCW 19.122.010, Washington Laws, 1988, Chapter 99 on Underground Utilities states that utilities shall be assigned "...responsibilities for locating and keeping accurate records of utility locations, protecting and repairing damage to existing underground facilities, and protecting the public health and safety from interruption in utility services caused by damage to existing underground utility facilities."

Callers are asked to use white paint to show their proposed path of excavation. Each locator uses a different color paint to show their underground facility (see reverse page). Digging should be done by hand 18" on either side of marking until utility is visible, before using other equipment.

**PLAN FOR SAFETY – CALL BEFORE YOU DIG
LOCATING SERVICES ARE FREE**

Thank you,

Cowlitz County
Utility Coordination Council

THE FOLLOWING LOCAL UTILITIES, ENTITIES AND OTHERS FORM THE COWLITZ COUNTY UTILITY COORDINATION COUNCIL:

		<u>COLOR CODE</u>
POWER	P.U.D. OF COWLITZ COUNTY	RED
GAS	CASCADE NATURAL GAS NORTHWEST PIPELINE CORPORATION OLYMPIC PIPE LINE COMPANY	YELLOW
TELEPHONE	AT&T GENERAL TELEPHONE KALAMA TELEPHONE U.S. SPRINT COMMUNICATIONS CENTURY LINK VERIZON COMMUNICATIONS FRONTIER CASCADE NETWORKS	ORANGE
WATER	BEACON HILL SEWER DISTRICT CITY OF CASTLE ROCK CITY OF KALAMA CITY OF KELSO CITY OF LONGVIEW CITY OF WOODLAND COWLITZ COUNTY PUBLIC WORKS P.U.D. OF COWLITZ COUNTY	BLUE
SEWER	BEACON HILL SEWER DISTRICT CITY OF CASTLE ROCK CITY OF KALAMA CITY OF KELSO CITY OF LONGVIEW CITY OF WOODLAND COWLITZ COUNTY PUBLIC WORKS (includes leachate pipeline)	GREEN
T.V. CABLE	COMCAST WASHINGTON STATE DEPARTMENT OF TRANSPORTATION	ORANGE

(OTHER UTILITIES MAY JOIN IN THE FUTURE – PLEASE ASK THE OPERATOR)

REPORT ALL EMERGENCIES TO “911”. All other damages should be reported directly to the utilities involved.

Nicks in insulation of gas, power or telephone should be reported to utilities promptly, as failure later can cause serious injuries or damages.

END OF CONTRACT